


1 Exterior (B)

1.1 Summary, Exterior (B)

1.1.1 Result overview, Evaluation area 1

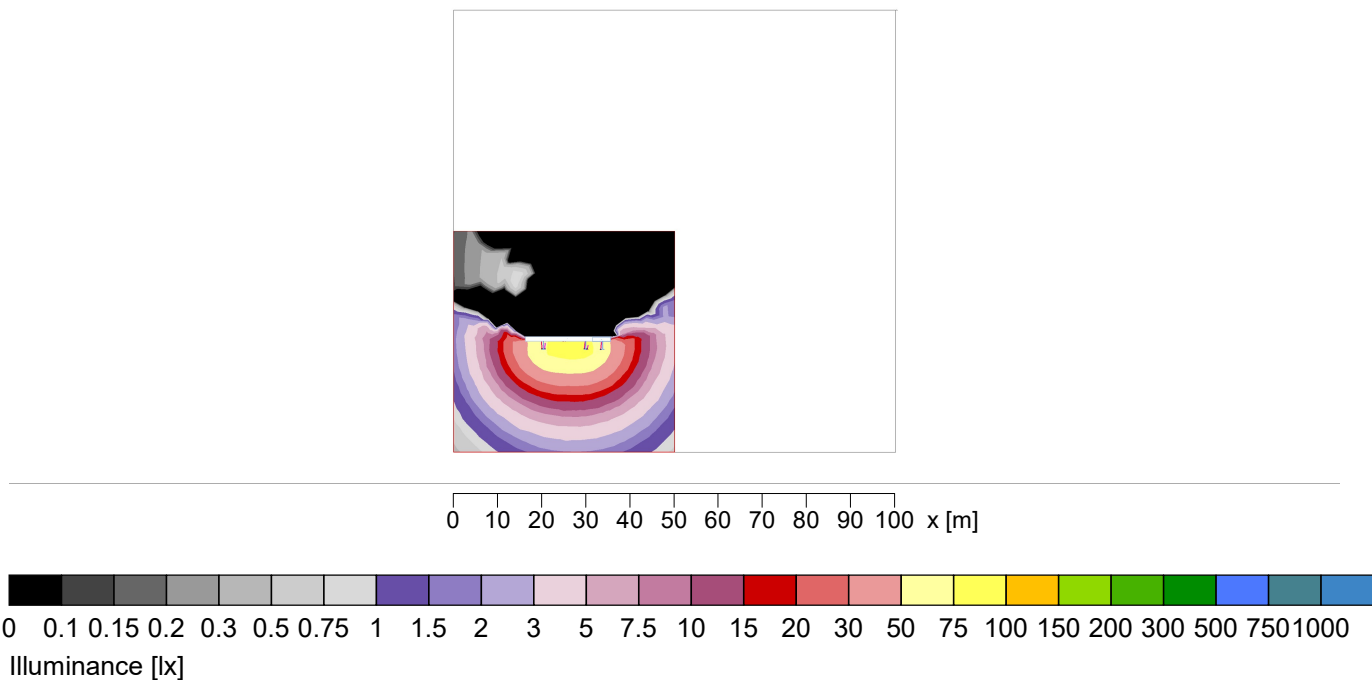

General

Calculation algorithm used	Average indirect fraction
Maintenance factor	0.80
Total luminous flux	48429.90 lm
Total power	574.7 W
Total power per area (2500.00 m ²)	0.23 W/m ² (3.05 W/m ² /100lx)

Evaluation area 1

Reference plane 1.1

	Horizontal
Em	7.54 lx
Emin	0 lx
Emin/Em (Uo)	---
Emin/Emax (Ud)	---
Position	0.00 m



Type No. \ Make

		KSR Lighting	
2	2 x	Order No.	: KSR5291
		Luminaire name	: Siena 150w LED Floodlight in 4000K
		Equipment	: 1 x LED 145 W / 12414 lm
4	3 x	Order No.	: KSR5289
		Luminaire name	: Siena 100w LED Floodlight in 4000K
		Equipment	: 1 x LED 94.9 W / 7867.3 lm

1 Exterior (B)

1.2 Calculation results, Exterior (B)

1.2.1 3D pseudo colours, View 1 (E)

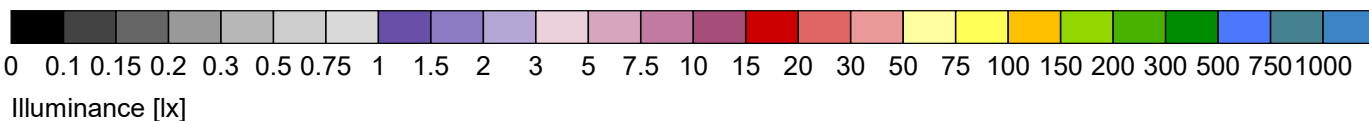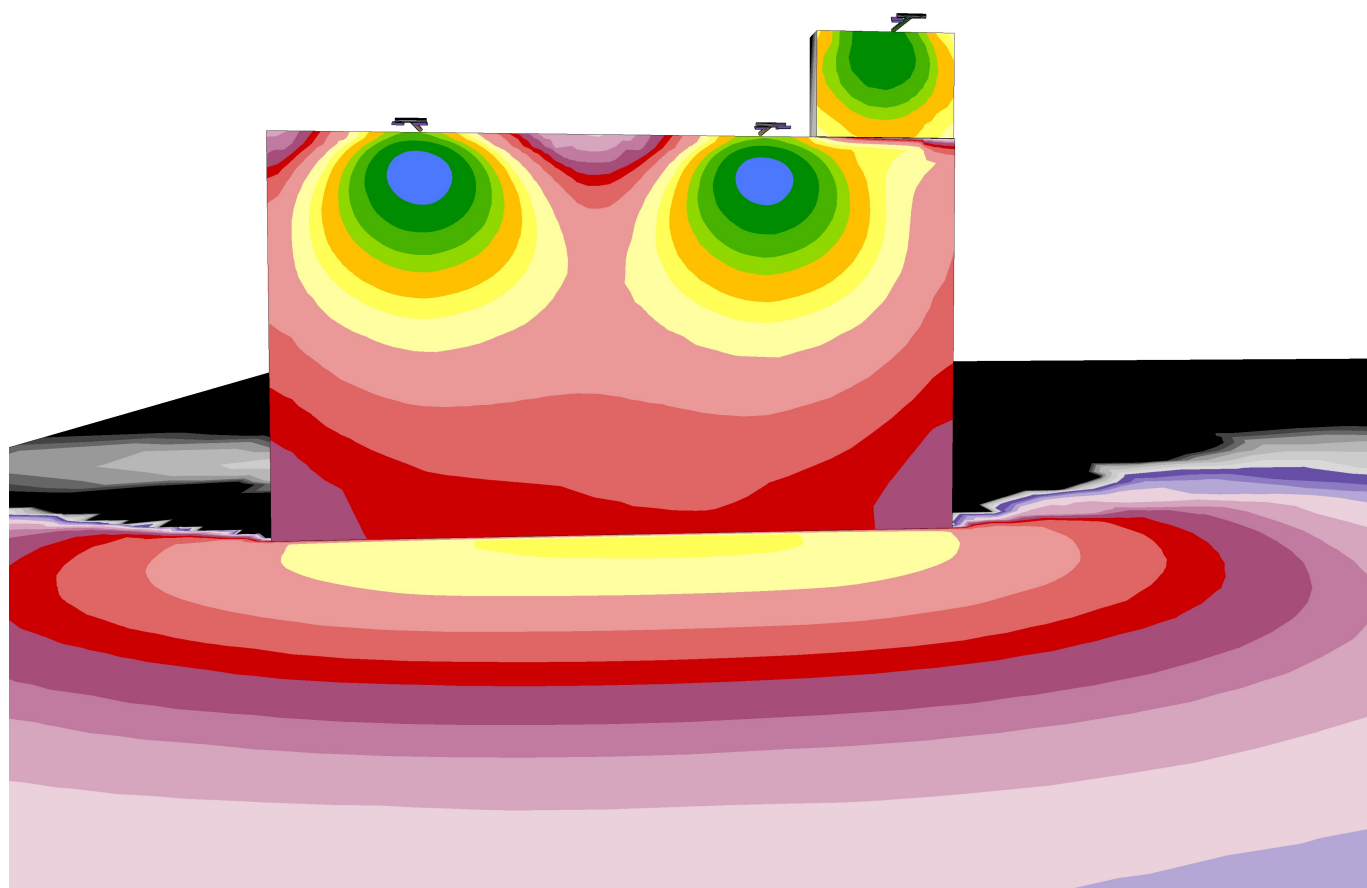

1.2 Calculation results, Exterior (B)

1.2.2 3D pseudo colours, View 2 (E)

