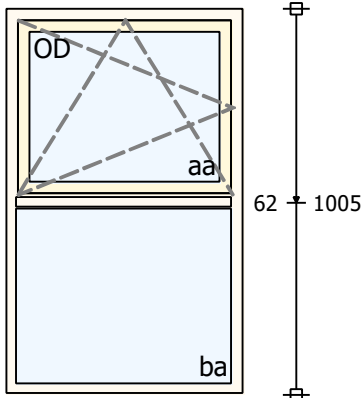
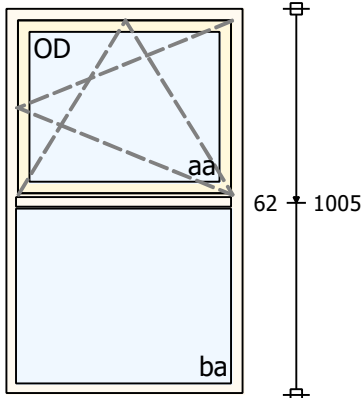
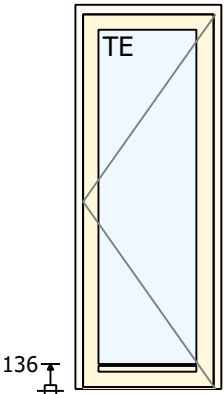
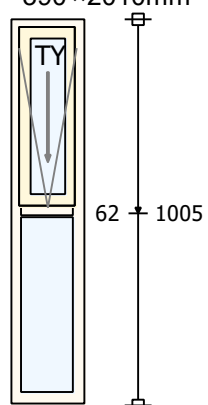
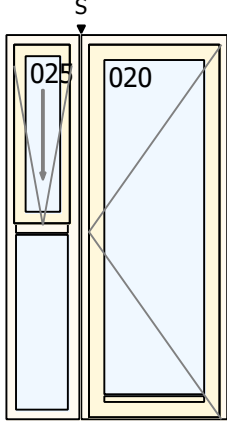


All drawings viewed externally

Lnr	Mrk	Qty	Description	Width× Height	Net unit price
005		1	<p>ND NTech One Fixed frame w/sash NOBB 52288354 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 1,2W/m²K Transmission Lt/Gg 74/0,46 Weight 76 kg</p> <p>Without ventilator Inward opening tilt and turn sash Lam 33.2 LowE w/Toughened WES/Ar Construction 6,76ES+16G+4#</p> <p>Aluminium cladded Product RAL 7016 matt Anthracite grey, Powder coated, gloss 30</p> <p>Surface finishing Product NCS S0502Y Std White</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR)</p> <p>Details (sash): a.: Handle with KISI (locked position)</p> <p>Bar: 62 = Solid transom/mullion</p>	1240 ×2010mm	1 352,78
					
010		1	<p>ND NTech One Fixed frame w/sash NOBB 52288354 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 1,2W/m²K Transmission Lt/Gg 74/0,46 Weight 76 kg</p> <p>Without ventilator Inward opening tilt and turn sash Lam 33.2 LowE w/Toughened WES/Ar Construction 6,76ES+16G+4#</p> <p>Aluminium cladded Product RAL 7016 matt Anthracite grey, Powder coated, gloss 30</p> <p>Surface finishing Product NCS S0502Y Std White</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR)</p> <p>Details (sash): a.: Handle with KISI (locked position)</p> <p>Bar: 62 = Solid transom/mullion</p>	1240 ×2010mm	1 352,78
					

Lnr	Mrk	Qty	Description	Width × Height	Net unit price
020	D1	1	<p>ND NTech Villa Balcony door (security) NOBB 47547057 Construction 100 mm frame incl. 8 mm alum. U-value product: 1,3W/m²K Transmission Lt/Gg 74/0,46 Weight 48 kg</p> <p>Right hinge Without ventilator Outward opening sidehinged door leaf Lam 33.2 LowE w/Toughened WES/Ar Construction 6,76ES+16G+4# Threshold 25 mm</p> <p>Panel height 136 mm</p> <p>Aluminium cladded Product RAL 7016 matt Anthracite grey, Powder coated, gloss 30</p> <p>Surface finishing Product NCS S0502Y Std White</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally</p>	770 × 2010mm	1 138,34
					
025	D1	1	<p>ND NTech Villa Fixed frame w/sash NOBB 51260035 Construction 105/80, 113 mm frame incl. 8 mm alum. U-value product: 1,4W/m²K Transmission Lt/Gg 74/0,46 Weight 30 kg</p> <p>Without ventilator Outward opening topswing reversible Opus sash Lam 33.2 LowE w/Toughened WES/Ar Construction 6,76ES+16G+4#</p> <p>Aluminium cladded Product RAL 7016 matt Anthracite grey, Powder coated, gloss 30</p> <p>Surface finishing Product NCS S0502Y Std White</p> <p>Details: Wallside frame finished No sub frame groove No fixing holes Classic profile, internally Drip-nose (NOR)</p> <p>Bar: 62 = Solid transom/mullion</p>	390 × 2010mm	915,85
					

All drawings viewed externally

Lnr	Mrk	Qty	Description	Width× Height	Net unit price
030	D1	1	<p>Coupling NOBB 26924951 S: Mounted on building site</p> <p>Aluminium cladded Product RAL 7016 matt Anthracite grey, Powder coated, gloss 30</p> <p>Surface finishing Product NCS S0502Y Std White</p>	1162 × 2010mm	59,11
					
035	Transp ort	1	<p>Freight cost increase NOBB 26924696</p> <p>Details: HIAB Offload to Kerb</p>		500,00

Averaged U-value: 1,3W/m²K

Calculation of U-value in accordance to NS-EN ISO 10077-1, 10077-2 and the programme "Therm".
Centre U-value of glass is calculated in accordance to NS-EN 673.
The calculation methodology is independently quality assured by SINTEF Building and Infrastructure.

Light transmission LT / Total solar energy transmission TST (g-value).

LT/TST is calculated according to EN 410.
Some deviance may occur between different batches and glass manufactures.

Risk of colour deviation

NorDan's products are coated using standard coating systems intended for normal UV exposure and UK/Ireland/Scandinavian climate conditions. NorDan have no liability for any discrepancies related to matching of colours with other products which are not coated by NorDan. This includes, but is not limited to, other products and/or facade elements.

Be aware about possible significant/noticeable colour deviations for different manufacturers of paint, applicators and described parameters:

- Significant - differences in special finish colours: pearl, mica, metallic
- Noticeable - connected elements with different gloss finishes
- Noticeable - difference between color batches
- Noticeable - various base material and surface structure smooth to rough and difference in thickness

General: Comparison and assessment of coated surfaces is carried out according to EN ISO 3668
Aluminum: Difference in shades for Standard Colors meets CEPE regulations.
Colours can be verified by customer by ordering a sample from NorDan

Important information

Glass must be pressure equalized due to the difference in air pressure in the lowlands in relation to the air pressure at altitudes above 800m. It is the customer's responsibility to inform if the windows are to be used above this height before ordering.
NorDan products may not be modified without the written consent of NorDan.

Currency	Total ex. VAT	Freight and fees	To pay ex. VAT	VAT 0%	To pay
GBP	4 818,85	+ 500	= 5 318,85	+ 0,00	5 318,85