


The use of this data by the recipient acts as an agreement of the following statements. Do not use this data if you do not agree with any of the following statements:-

All drawings are based upon site information supplied by third parties and as such their accuracy cannot be guaranteed. All features are approximate and subject to clarification by a detailed topographical survey, statutory service enquiries and confirmation of the legal boundaries.



Do not scale except for planning purposes.

Report any discrepancies in writing to Palmer Lunn Architects before proceeding.



Schedule of Works

1. non-original external metal access hatch removed and opening prepared to receive new infill
2. non-original shopfront removed and existing opening prepared to receive new shopfront
3. original joists and floorboards retained and, where necessary, repaired. Where non-original boards removed these are to be replaced with new boards to match existing
4. original structure, beams and ceilings to be retained
5. existing timber staircase retained and refurbished
6. existing glazed lantern retained and repaired. Non-original cracked or obscured glass to be replaced with new clear glass
7. non-original lightweight partitions and associated fixtures to be removed

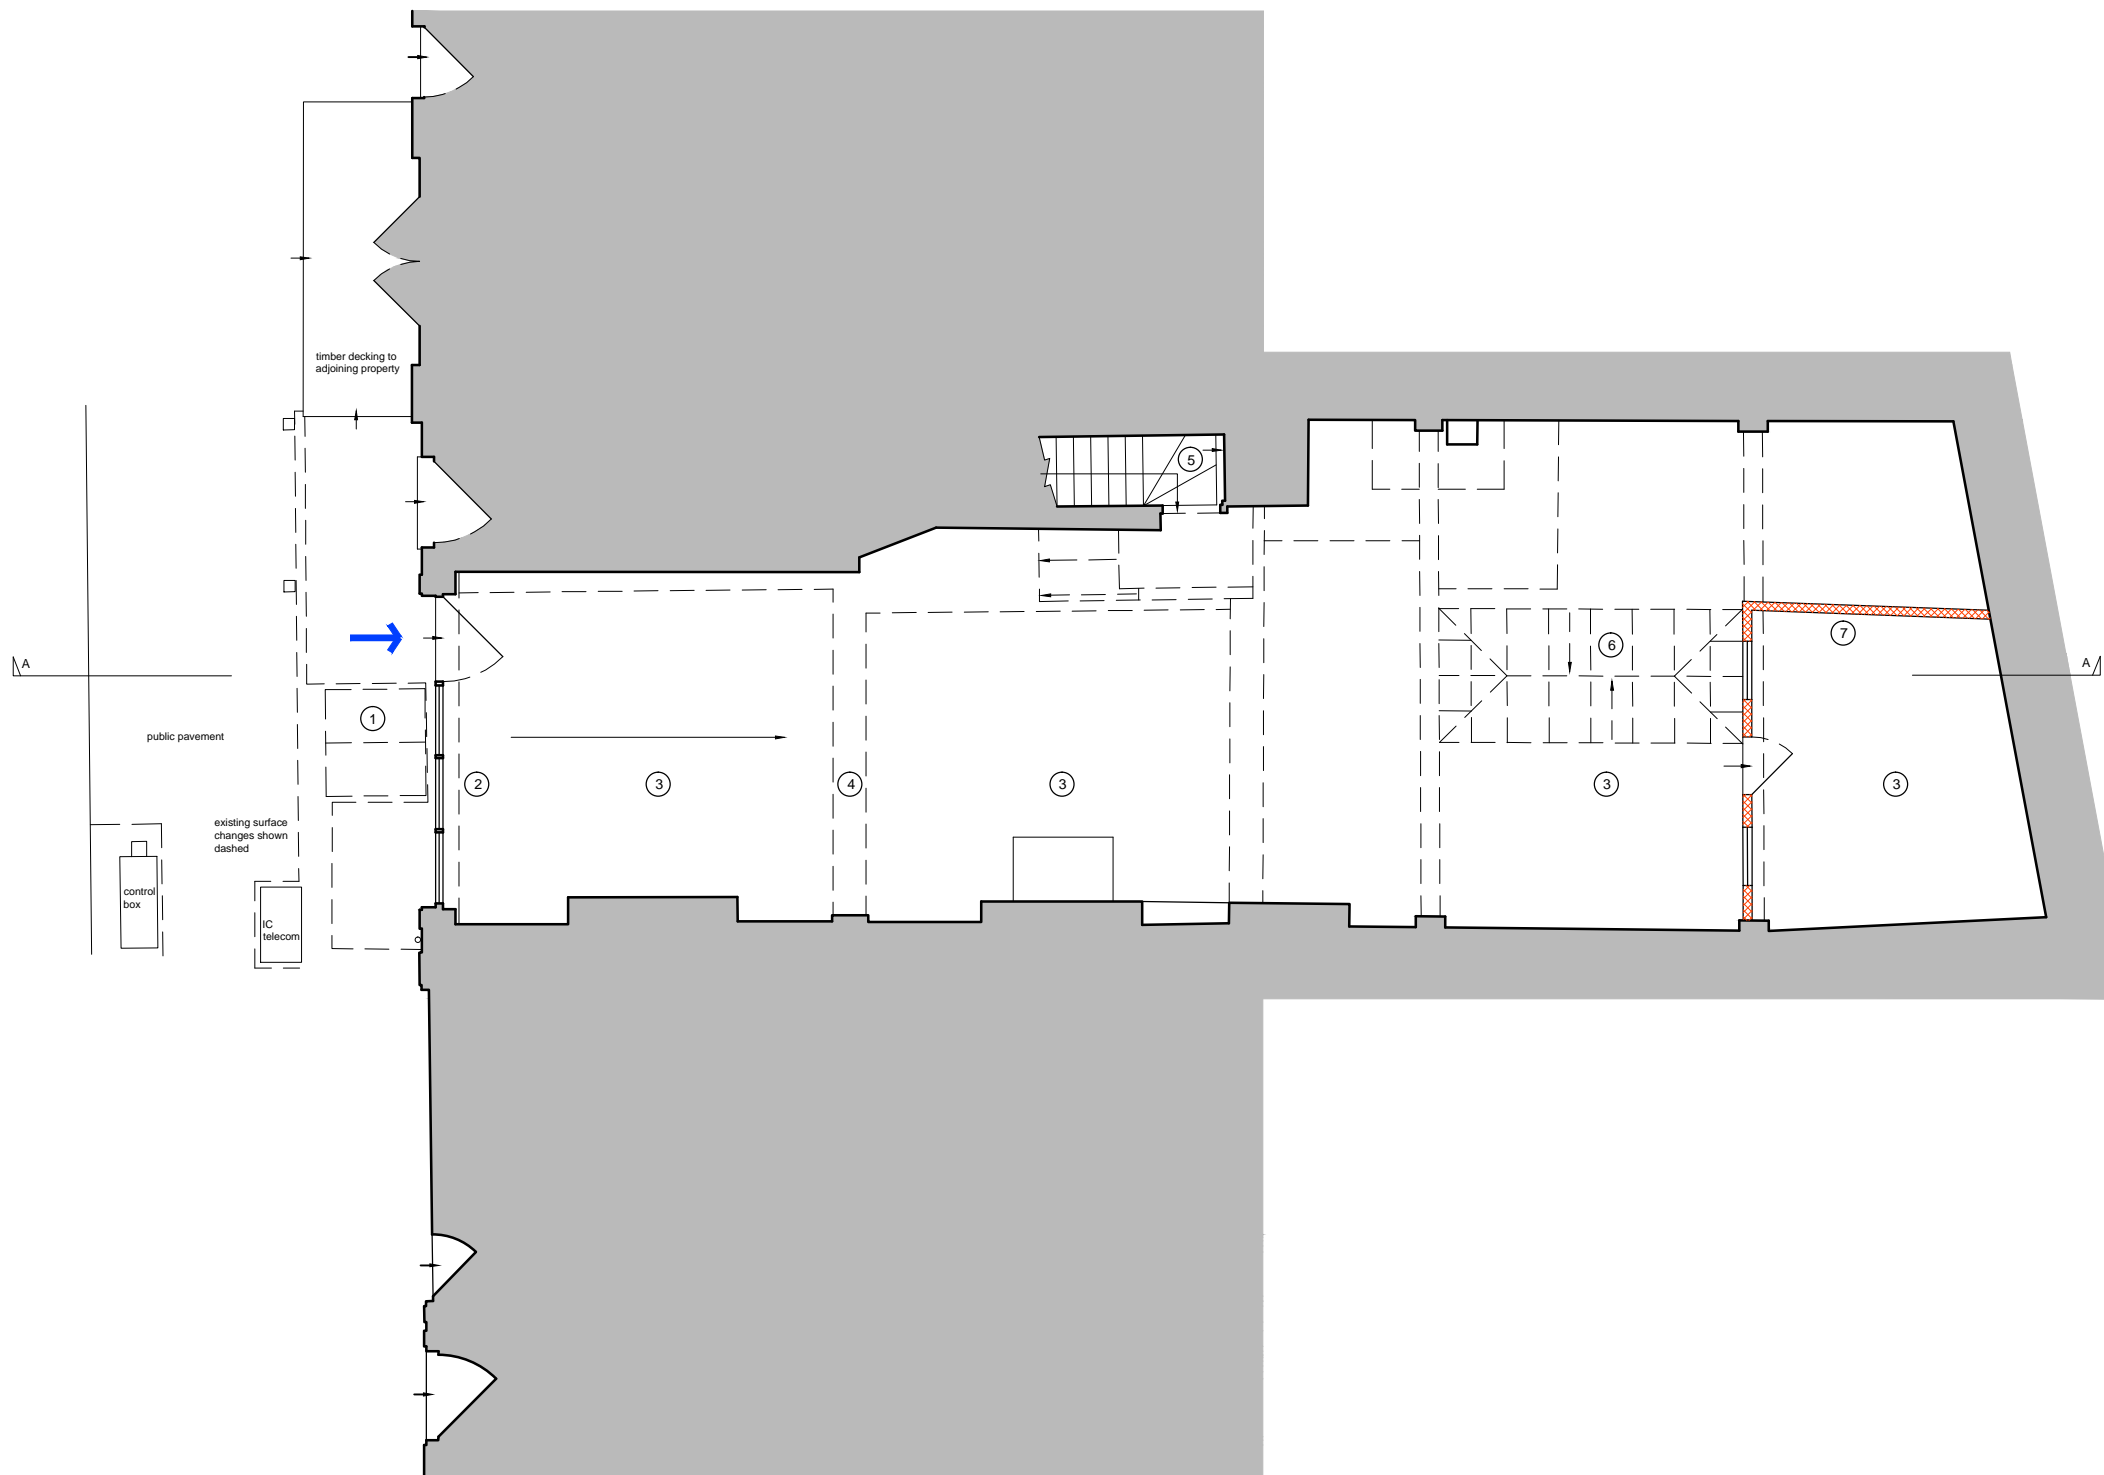

Rev	Description	Date	Drn	Chk
P01	Planning	25.11.2016	APa	MLu

Status
PLANNING

Client
Build8

Project
Shop Refurbishment
15 Percy Street
London W1T 1DS

Drawing
Ground Floor Plan
as Existing

Project No.	Drawing No.	Revision
16006	PCY-PL-004	P01
Scale @ A3	Drawn By	
1:100	APa	