
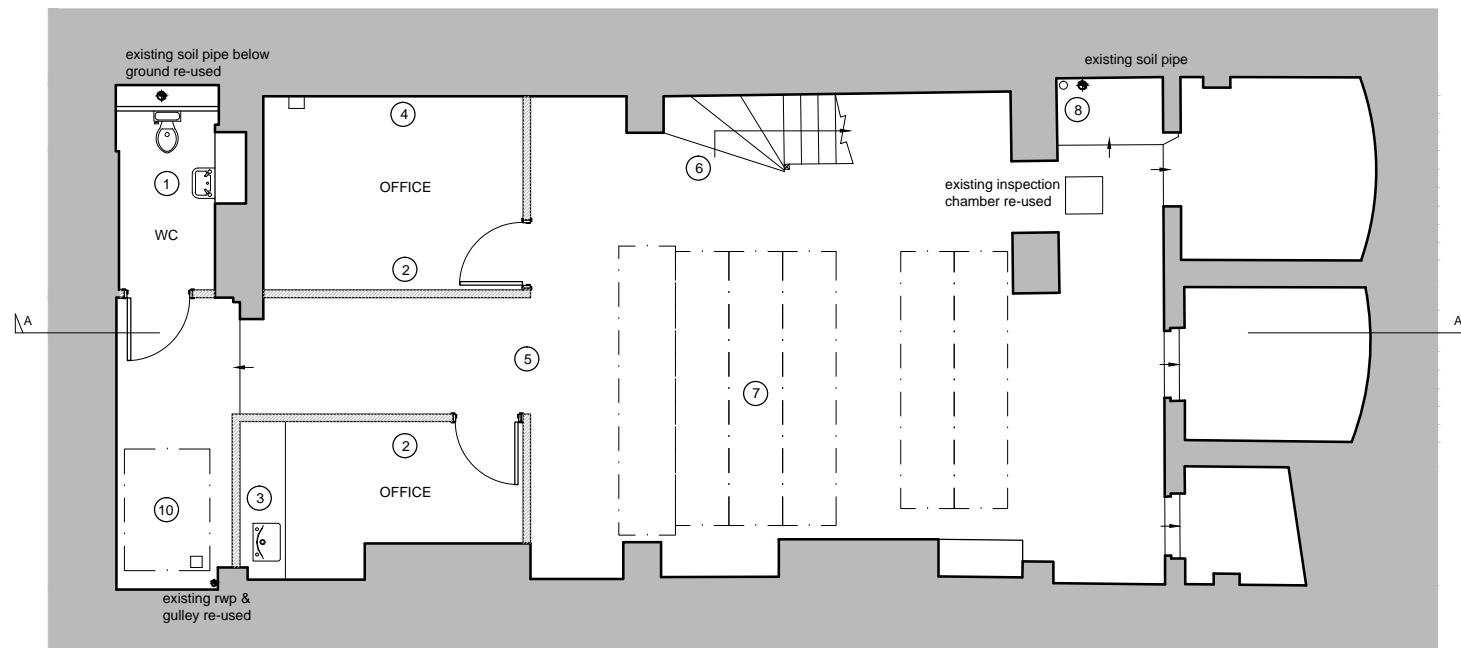


The use of this data by the recipient acts as an agreement of the following statements. Do not use this data if you do not agree with any of the following statements:-

All drawings are based upon site information supplied by third parties and as such their accuracy cannot be guaranteed. All features are approximate and subject to clarification by a detailed topographical survey, statutory service enquiries and confirmation of the legal boundaries.

Do not scale except for planning purposes.

Report any discrepancies in writing to Palmer Lunn Architects before proceeding.



Schedule of Works

1. new wc comprising new lightweight partition and finishes throughout and new sanitary ware connecting into existing service points, reversible
2. new lightweight partition and door shown hatched, reversible
3. new free-standing counter and sink unit, reversible
4. existing finishes to walls and ceilings made good ready for redecoration
5. local repairs and levelling screed to retained concrete floor throughout
6. existing retained timber staircase to be refurbished
7. demountable storage racking system shown dashed with 4 no. low profile tracks mechanically secured through existing slab, reversible
8. existing service riser duct incl soil pipe retained for re-use
9. existing inspection chamber re-used
10. zone for waste and segregated recycling
11. existing below ground soil pipe re-used
12. existing rwp & gulley re-used

P02	Planning	01.12.2016	APa	MLu
P01	Planning	25.11.2016	APa	MLu

Rev	Description	Date	Drn	Chk
-----	-------------	------	-----	-----

Status
PLANNING

Client
Build8

Project
Shop Refurbishment
15 Percy Street
London W1T 1DS

Drawing
Basement Plan
as Proposed

Project No.	Drawing No.	Revision
16006	PCY-PL-007	P02
Scale @ A3	Drawn By	
1:100	APa	

palmer lunn architects
www.palmerlunn.com

