


Channel for LED light line

Channel for LED light line with DALI LED converter for surface-mounting and suspending, channel of aluminium in silver powder coated. Includes end cap set. Luminaire wired with halogen-free leads. Dimensions: 1024 x 76 x 98 mm weight: 3 kg. SLOIN consists of a channel, LED-batten, cover and accessories, which have to be configured and ordered separately. This product is one part of the complete configuration.




ZS_SLI_F_Einzelleuchte.jpg

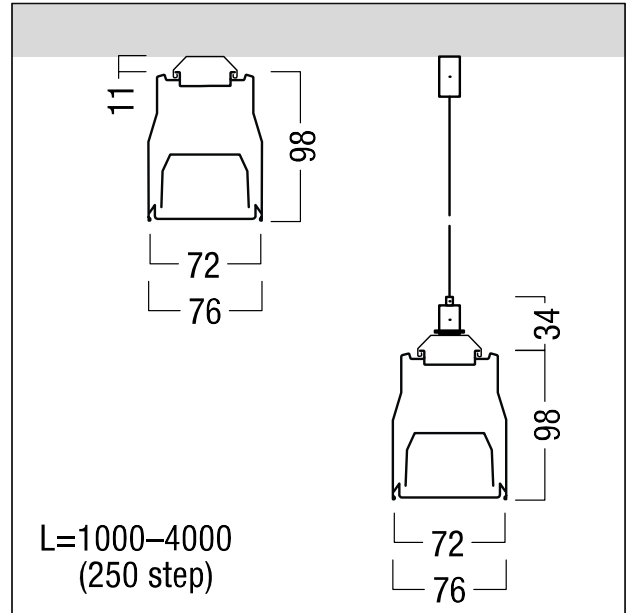

ZS_SLI_M_alleDecke.wmf

Light Distribution

4000 K PC

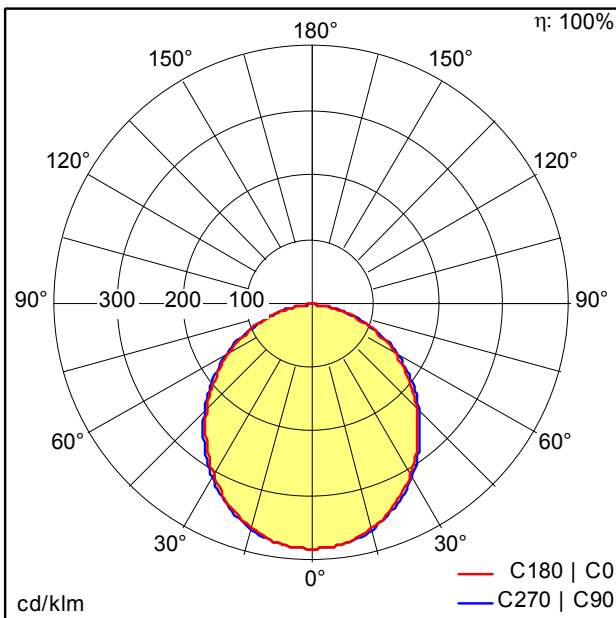

D42967AA_SLOIN_LED1800-840_L1000_PC_HE.Idt

- Light Source: LED
- Luminaire luminous flux*: 1640 lm
- Luminaire efficacy*: 93 lm/W
- Colour Rendering Index min.: 80
- Ballast: 1 x 28000654 LCA 35W 150-700mA one4all Ip PRE
- Correlated colour temperature: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life*: L90 50000h at 25°C
- Luminaire input power*: 17.6 W Power factor = 0.83
- Standby Power*: 0.14 W
- Dimming: LDE dimmable to 1% over DALI, DSI and switchDIM DC level is adjustable

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.