

DETAILED LUMINAIRE SCHEDULE

PROJECT: SHROPSHIRE HOUSE

REFERENCE: 0206-SC2

CLIENT: LAZARI INVESTMENTS LTD

DATE: 14 JUNE 22

REVISION: B - ISSUED 1 JULY 2022

DETAILED LUMINAIRE SCHEDULE

the language of light

Project: Shropshire House
Reference: 0206 – SC2

Revision Status

Xx/xx/xxxx - First Issue for Comments
21/06/2022 A - Description updated to all fittings
01/07/2022 B - LED2 DL1 updated

1. GENERAL CONDITIONS

- 1.1 The specification sheets indicating the lighting design requirements for specific areas within this project form part of this document and should be read in conjunction with this preamble and the Lighting Consultant's relevant drawings, and associated sketches.
- 1.2 This specification supersedes all previous issues.
- 1.3 All quantities shall be checked against the construction drawings.
- 1.4 All luminaires fixed to Portland stone or similar should be resin fixed.

2. SAMPLES & PROTOTYPES

- 2.1 All lighting equipment shall be currently available – working samples will be required for submission and are to be approved by the Client/Architect.
- 2.2 Should a sample of a standard, or prototype of a special luminaire or variant of a standard luminaire be ordered, its cost shall either be incorporated in a tender price, or shall be invoiced to the Client or his nominated representative separately, as agreed.
- 2.3 Any such sample prototype or variant shall comply with the lighting design specification, and shall be submitted to the Lighting Consultant, together with full photometric and dimensional data if specifically requested, to enable both its accurate assessment and the detailing of any adjustments deemed necessary prior to the commencement of full production.

3. STANDARDS COMPLIANCE

- 3.1 For projects in the United Kingdom, all equipment supplied shall comply with the relevant BS, EN and IEC requirements, and be capable of installation in accordance with the manufacturers' instructions, the current edition of the IEE Wiring Regulations and all statutory and local authority requirements. Standards requirements particular to individual luminaire types are indicated on the relevant specification sheet.
- 3.2 Notwithstanding the above, the following British Standards in particular should be checked for compliance:
 - BS 559 Electric signs and high voltage luminous discharge tube installations.
 - BS 3535 Safety isolating transformers for industrial and domestic purposes.
 - BS 4533 Luminaires.

DETAILED LUMINAIRE SCHEDULE

the language of light

Project: Shropshire House
Reference: 0206 – SC2

3.3 For projects outside the United Kingdom, all equipment supplied shall comply with the relevant standards currently in force in the project's country of origin.

3.4 The cost of obtaining any necessary approvals shall be included in any tender price, detailed as a separate item.

4 PROTECTION

4.1 All equipment shall be supplied with adequate means of protection to ensure its preservation during transport to site and any subsequent storage prior to installation.

4.2 All vulnerable finished parts liable to scratching or other abrasion during handling and installation shall be further protected by a removable film applied prior to dispatch.

5. TECHNICAL REQUIREMENTS

5.1 Luminaires

5.1.1 Equipment selected as a standard item from a particular manufacturer's range has been specified with a view to performance, optics, maintenance, quality, aesthetics, etc.

5.1.2 Should alternative equipment be offered, full technical and photometric data shall be submitted to Studio29 Ltd in time to enable its accurate assessment. If any variants of standard luminaires are required, these shall be developed by the manufacturer of the standard luminaire, unless otherwise specifically stated, and shall be manufactured to the same standards as the equivalent standard luminaire.

5.1.3 If specified, two copies of all working drawings of proposed variants dimensioned in millimetres shall be supplied to Studio29 Ltd for approval prior to fabrication.

5.1.4 Notwithstanding the above, the manufacturer shall remain responsible for ensuring compliance with relevant standards, the accuracy of the information shown on his drawings at all times and for ensuring that the equipment shown fulfils the requirements of this specification.

5.1.5 Studio29 Ltd cannot accept responsibility for the installation of non-approved luminaires.

5.1.6 The final location of each luminaire and, where relevant, its integration with the architecture shall be as detailed on the construction issue drawings. Studio29 Ltd cannot accept responsibility for luminaires installed in a manner other than indicated in the relevant drawings or as otherwise agreed and minuted.

5.2 Control Gear

5.2.1 All necessary control gear and transformers shall be mounted within the luminaire unless shown as being located remote or adjacent. All such gear shall be of good quality construction, shall comply with all relevant statutory regulations, shall be compatible with the lamps specified, and shall be mounted and wired in accordance with the manufacturers' instructions.

5.2.2 Where appropriate, the luminaire manufacturer shall ensure compatibility between control gear and the proposed control system. The manufacturer shall also provide all necessary data regarding gear losses, etc. to enable dimmers / contactors to be sized correctly.

5.2.3 Transformers shall have a stable output voltage of 11.8V / 22.8V, under varying loads, where the output voltage is nominally quoted at 12V / 24V.

DETAILED LUMINAIRE SCHEDULE

Project: Shropshire House
Reference: 0206 – SC2

- 5.2.4 Unless otherwise stated, all transformers shall be suitable for dimming on their primary side via a thyristor controlled remote lighting control system.
- 5.2.5 Where gear or transformers are installed remotely, care should be taken to ensure that any audible sounds generated by control gear, or by lamp filaments via control gear are kept to a minimum. Where this is particularly crucial, detailed acoustic requirements are included in the Specific Conditions.
- 5.2.6 All equipment shall be protected from unexpected mains failure, and mains borne interference.
- 5.2.7 Electrical supply connections shall be designed to facilitate the easy installation of the luminaires. The supplier shall liaise with the Electrical Engineer to ensure any specific requirements of his in this respect are met.
- 5.3 Lamps
- 5.3.1 The following lamp manufacturers are approved;
General Electric; Osram Sylvania; Philips; Venture; and BLV.
- 5.3.2 Incandescent and tungsten halogen lamps shall not be operated, other than for initial testing, prior to final inspection.
- 5.3.3 Should alternative lamps be offered, these shall require the approval of Studio29 Ltd except where noted below, provided particular attention is paid to colour rendering, colour temperature, light distribution, life expectancy and general performance when selecting such alternatives.
- 5.3.4 Allowance shall be made for the specialised installation of lighting as required (ie cold cathode). Such installation may require the services of a specialise sub contractor
- 5.3.5 Studio29 Ltd recommends that a lamp recycling/disposal regime be assessed by the client/building operator prior to completion of the project. Services provided by various lamp recycling contractors vary and the suitability for a particular project and the completeness of their recycling processes should be assessed by the operator.
- Disposal of twenty fluorescent, or metal halide, lamps or greater is considered hazardous waste disposal and must be carried out at a licensed landfill site or through a licensed recycling company.
- Recommended lamp recycling contractors include but are not limited to:

DETAILED LUMINAIRE SCHEDULE

the language of light

Project: Shropshire House
Reference: 0206 – SC2


LUMINAIRE REF: **DL1 UPDATED 01.07.2022**

Manufacturer: Iguzzini
Tel: Mobile: 077 8670 7427 Office: 014 8346 8000
Contact: Nick Constantine Email: nick.constantine@iguzzini.co.uk

Location: Front elevation
Cat. Reference: **iPro – EP51**
Description: Medium beam warm light LED to downlight front facade
Dimensions: 170mm Projection
140mm Width
140mm Height

Accessories:
Control Gear: On/off
Colour: White
CDM/H&S: -
Notes: -

Circuit Wattage: 13.6W/m
Voltage: 230V
Beam Angle: 20
Colour Kelvin: 3000K
Luminous Flux: 1184
CRI (Ra) 80

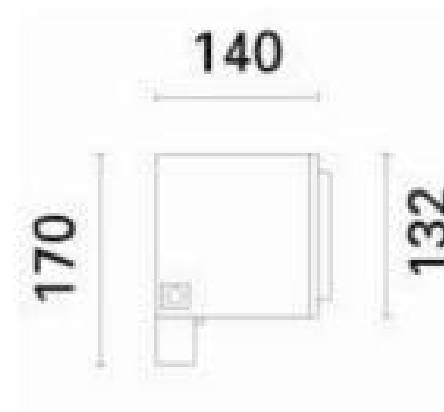

DETAILED LUMINAIRE SCHEDULE

the language of light

Project: Shropshire House
Reference: 0206 – SC2

LUMINAIRE REF:

LED1

Manufacturer: AFX
Tel: Mobile: 07584188272
Contact: James Hamilton Email: jh@architecturalfx.co.uk

Location: Front and side elevations

Cat. Reference: **VARIOLED FLEX VENUS TOP VIEW**

Description: Warm light flexible LED linear

Dimensions: Various Length
16 mm Width not including clip
15mm Height

Accessories: **Mounting clip and Mounting profile**

Control Gear: DALI

Colour: White

CDM/H&S: -

Notes: **-Mounting clip : 50 X**
Mountng profile max length 2000 mm

Circuit Wattage: 15W/m


Voltage: 24V

Beam Angle: N/A

Colour Kelvin: 3000K

Luminous Flux:

CRI (Ra) 90



DETAILED LUMINAIRE SCHEDULE

the language of light

Project: Shropshire House
Reference: 0206 – SC2

LUMINAIRE REF: LED2 UPDATED 01.07.2022


Manufacturer: AFX
Tel: Mobile: 07584188272
Contact: James Hamilton Email: jh@architecturalfx.co.uk

Location: Building Sign
Cat. Reference: **VARIOLED FLEX HYDRA**
Description: Warm light flexible LED linear 2900K /10W/m/IP67
Dimensions: Various Length
12 mm Width
4mm Height

Accessories:
Control Gear: DALI
Colour: White
CDM/H&S: -
Notes:

Circuit Wattage: 10W/m
Voltage: 24V
Beam Angle: N/A
Colour Kelvin: 2900K
Luminous Flux: 780 lm/m
CRI (Ra) 90

12.5 mm x 4 mm



DETAILED LUMINAIRE SCHEDULE

the language of light

Project: Shropshire House
Reference: 0206 – SC2

LUMINAIRE REF: **UL1 UPDATED 01.07.2022**

Manufacturer: Anolis
Tel: Mobile: 075 2581 3548
Contact: Muraly Kuhan
Office:
Email: muraly.kuhan@anolis.co.uk

Location: Front Elavation Staircase Glazing
Cat. Reference: **CALUMMA M MC**
Description: RGBW LED flood light
Dimensions: 106mm
236mm
275mm

Length
Diameter
Height

Accessories:
Control Gear: DMX
Colour: Graphite grey
CDM/H&S: -
Notes: -

Circuit Wattage: 60W
Voltage: 230V
Beam Angle: TBC
Colour Kelvin: RGBW (RED, GREEN, BLUE, WHITE)
Luminous Flux: 2906
CRI (Ra) 80

