

Object : CROSS STREET ROOF TERRACE
Installation : CROSS STREET ROOF TERRACE
Project number : 550201
Date : 14.10.2022

1 Luminaire data

1.1 Luceco PLC, Kingfisher - Quarto (QUAFL15D)

1.1.1 Data sheet

Manufacturer: Luceco PLC



QUAFL15D wall-mounted luminaire Kingfisher - Quarto

Quarto LED Wallpack, 1,542 lumens, 13.5W, 500mA, 114.2lm/W, 4000K, Flood Optic, flat glass, IP65, IK10, Anthracite Grey RAL 7016. For emergency versions, use a Lumen value of 380 lumens.



Luminaire data

Absolute Photometry
Luminaire efficacy : 114.11 lm/W
Classification : A40 ↓100.0% ↑0.0%
CIE Flux Codes : 42 84 99 100 100
UGR 4H 8H : 36.6 / 30.2
Control gear : HFD - HF DALI
Power : 13.5 W
Luminous flux : 1540.5 lm

Equipped with

Quantity : 1
Designation : LED
Colour : 4000K
Socket : -
Colour reproduction : 70

Dimensions : 230 mm x 230 mm x 230 mm

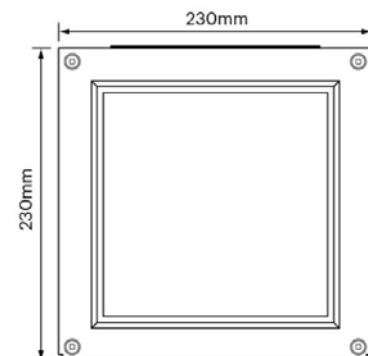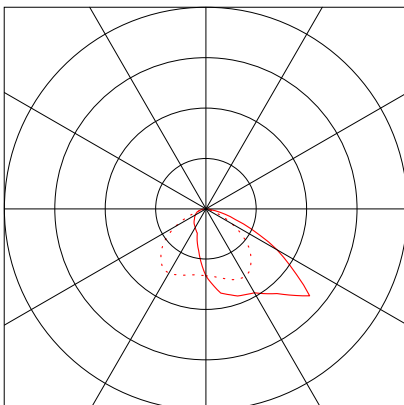

Emergency Lighting

Light source from normal operation with reduced flux

Luminous flux : 380 lm