

BAUDER XF301 SEDUM BLANKET TO BE LAID STAGGERED WITH FERTILISER APPLIED AS SUPPLIED

AL40 EDGE TRIM 80MM OFFSET FROM ROOF EDGE FIXED WITH MEMBRANE OFFCUTS USING KS137 ADHESIVE

EPDM MEMBRANE WRAPPED AROUND BATTENING INSTALLED IN ACCORDANCE WITH MANUFACTURERS GUIDELINES

25 X 38MM BATTENING (QTY X2)

25 X 38MM BATTENING (QTY X2)

TERMINATION BAR SCREWED TO BATTENING TO FIX EPDM

GUTTERING

TYVEK SUPRO EXTERIOR MEMBRANE

145MM SIPS WALL PANEL

VENTILATION VOID WITH 25X38MM TANALISED BATTENS AND COUNTER BATTENS

18/20MM VERTICALLY MOUNTED CLADDING AS SUPPLIED BY ECOSPACE USE FIRE TREATED FOR ELEVATIONS SPECIFIED BY FR DRAWING

12.5MM FIRE RATED WALL BOARD (SEE FR drawing for elevations and when to apply)


TYVEK AIRGUARD REFLECTIVE SHEET TO BE APPLIED TO ALL EXTERNAL WALL ELEVATIONS

170MM SIPS ROOF PANEL

VENTILATION VOID WITH 25X38MM TANALISED BATTENS AND COUNTER BATTENS

INTERIOR FINISH IN LINE WITH BUILDING REGULATIONS

FIRE RATED PLASTERBOARD

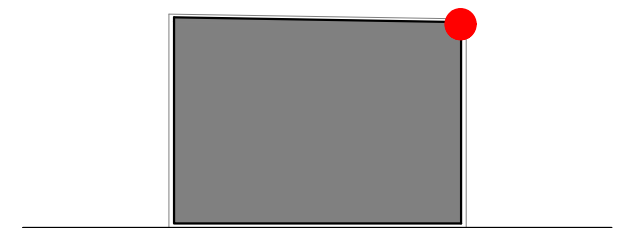

WALL / ROOF DETAIL - SEDUM