


**SPECIFICATION NOTES**

- Plant Material and Workmanship to be in accordance with MCA Landscape Specification and the following British Standards,
- a) BS 8545:2014 Trees: from nursery to independence in the landscape. Recommendations.
- b) All trees, shrubs and hedge plants supplied shall comply with the requirements of British Standard 3936, Specification for Nursery Stock.
- c) All pre-planting site preparation, planting and post-planting maintenance works shall be carried out in accordance with the requirements of British Standard 4428 (1983) Code of Practice for General Landscape Operations (excluding hard surfaces).
- d) The use of chemicals (herbicides, insecticides, fungicides and slug pellets etc) is discouraged and all substances used shall be biodegradable and non-residual.
- e) The use of chemical fertilisers is discouraged and preference would be for well-rotted manure to be used instead.
- f) Soil conditioners, mulches etc. shall be peat free.

**KEY**

- Tree Pit in Paved Areas
- GreenBlue Urban PG GR201 (White) Tree Guard
- IRABR212 Anemone single stem inflorescence system with cast iron GLUMCA RootColl, 34x4, 250mm x 20mm x 90mm (3.6x) RootColl volume Cells filled with topsoil to BS1382
- CL12000A Root Direct GIGITA Tree guard
- ARBIC12A Pre-cast Arbutus pruned stone tree guard 1200mm x 1200mm x 50mm thick, in two halves, with galvanised steel support frame. R21000A Root Direct GIGITA Tree guard
- SASP Arborist strapped anchor system - Large (Specialist) required for SASP installation.
- Tree in 1.2m x 1.2m x 600mm deep pit backfilled in layers with topsoil.
- Species Rich Turf and bulbs mown to 50mm minimum height

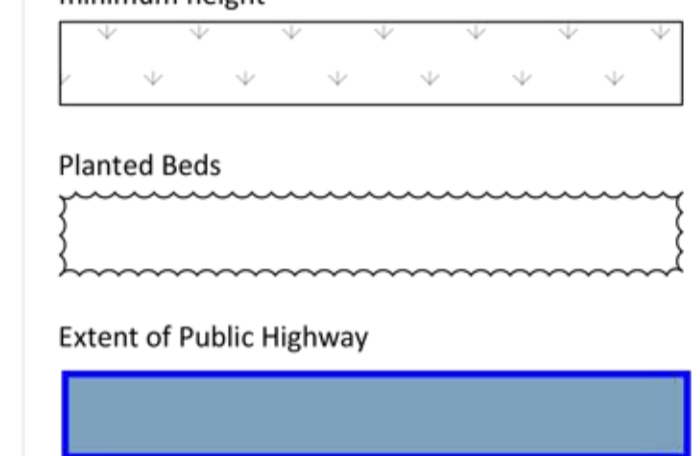

**REVISIONS**

- Rev A: 27/05/15 Comments from Carrie-An Arnold/LBC incorporated as follows; Ivy removed from woodland ground layer and alternative bulbs/proposed.
- Rev B: 09/10/15 Layout updated.
- Rev C: 10/12/15 Comprehensive revisions following Camden Council review meeting on site.
- Rev D: 11/12/15 Play equipment deleted and parking altered.
- Rev E: 29/01/16 MUGA entrance ramp from play area updated.
- Rev F: 21/03/16 Play equipment added from manufacturer, trees added to play area, parking bay numbers added.
- Rev G: 03/05/16 Play area seating area redesigned with additional planting. Bench added to south play area and benches moved to avoid hedges. Wall flanking MUGA/Play Area ramp lowered.
- Rev H: 20/05/16 Central trees relocated and doubled up to avoid existing services.
- Rev I: 10/08/16 Tree planters added.
- Rev J: 06/10/16 bollards deleted due to clash with underground vaults.
- Rev K: 29/11/16 Brick wall and railings adjacent to Verulam Street turning head amended. Play area seats adjusted.
- Rev L: 01/12/16 Granite kerb highway edge delineation shown.
- Rev M: 07/12/16 Zoe Trower's comments from coordination meeting addressed.
- Rev N: 05/01/17 Verulam Street highway boundary and manhole altered as per email from Zoe Trower 16/12/16
- Rev O: 06/01/17 Baldwin Gardens Highway boundary shown to be delineated with metal studs.
- Rev P: 01/02/17 Baldwin Gardens highway hatch amended.
- Rev Q: 01/02/17 Verulam Street school playground boundary altered.

**MCA**  
Landscape Architects

www.mcalandscape.co.uk  
Tel: (01993) 811888 Mob: 07831 249130

**Higgins**  
CONSTRUCTION  
BALDWIN ESTATE  
GRAYS INN ROAD  
PLANTING PLAN