



In accordance with BS 5387:2012:

Roots, whilst exposed, should immediately be wrapped or covered to prevent desiccation and to protect them from rapid temperature changes. Any wrapping should be removed prior to backfilling, which should take place as soon as possible.

Prior to backfilling, call garden designer to site and agree backfill to retained roots which should be surrounded with topsoil or uncompacted sharp sand (builders' sand should not be used because of its high salt content, which is toxic to tree roots), or other loose inert granular fill, before soil or other suitable material is replaced. This material should be free of contaminants and other foreign objects potentially injurious to tree roots.

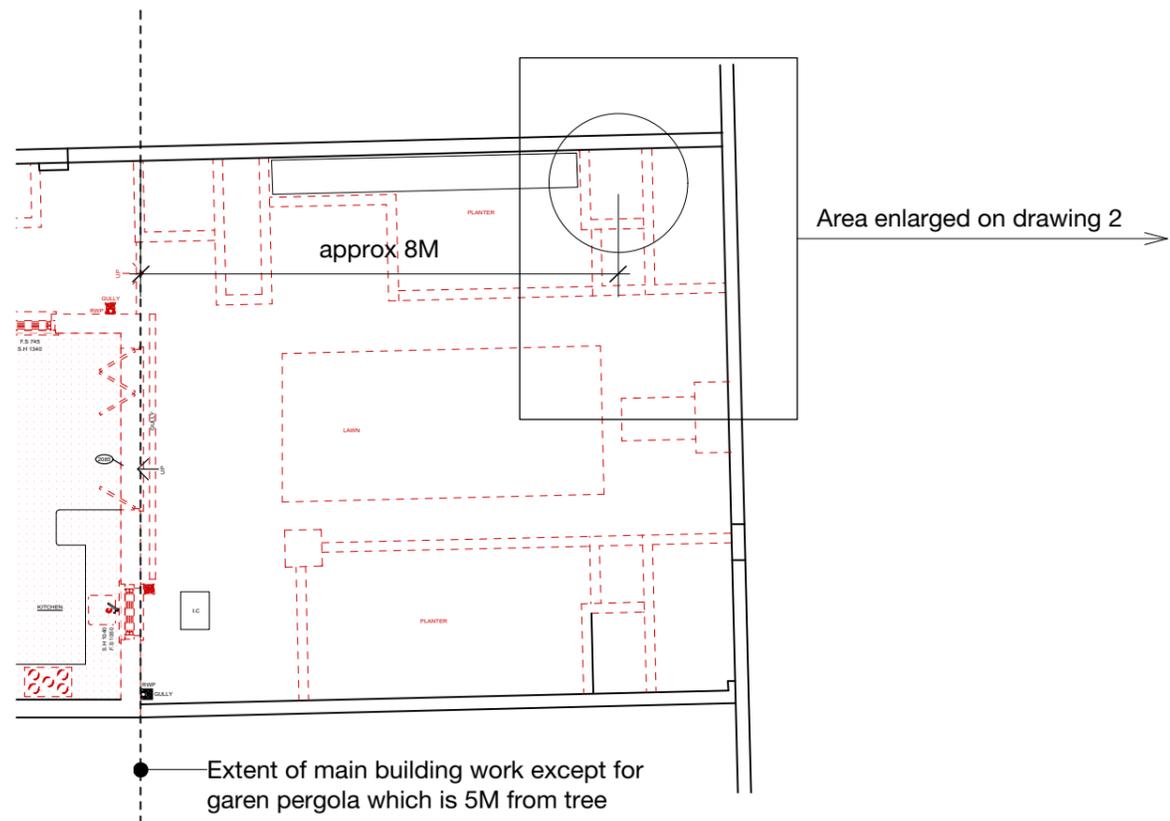

1 Plan of existing garden for context

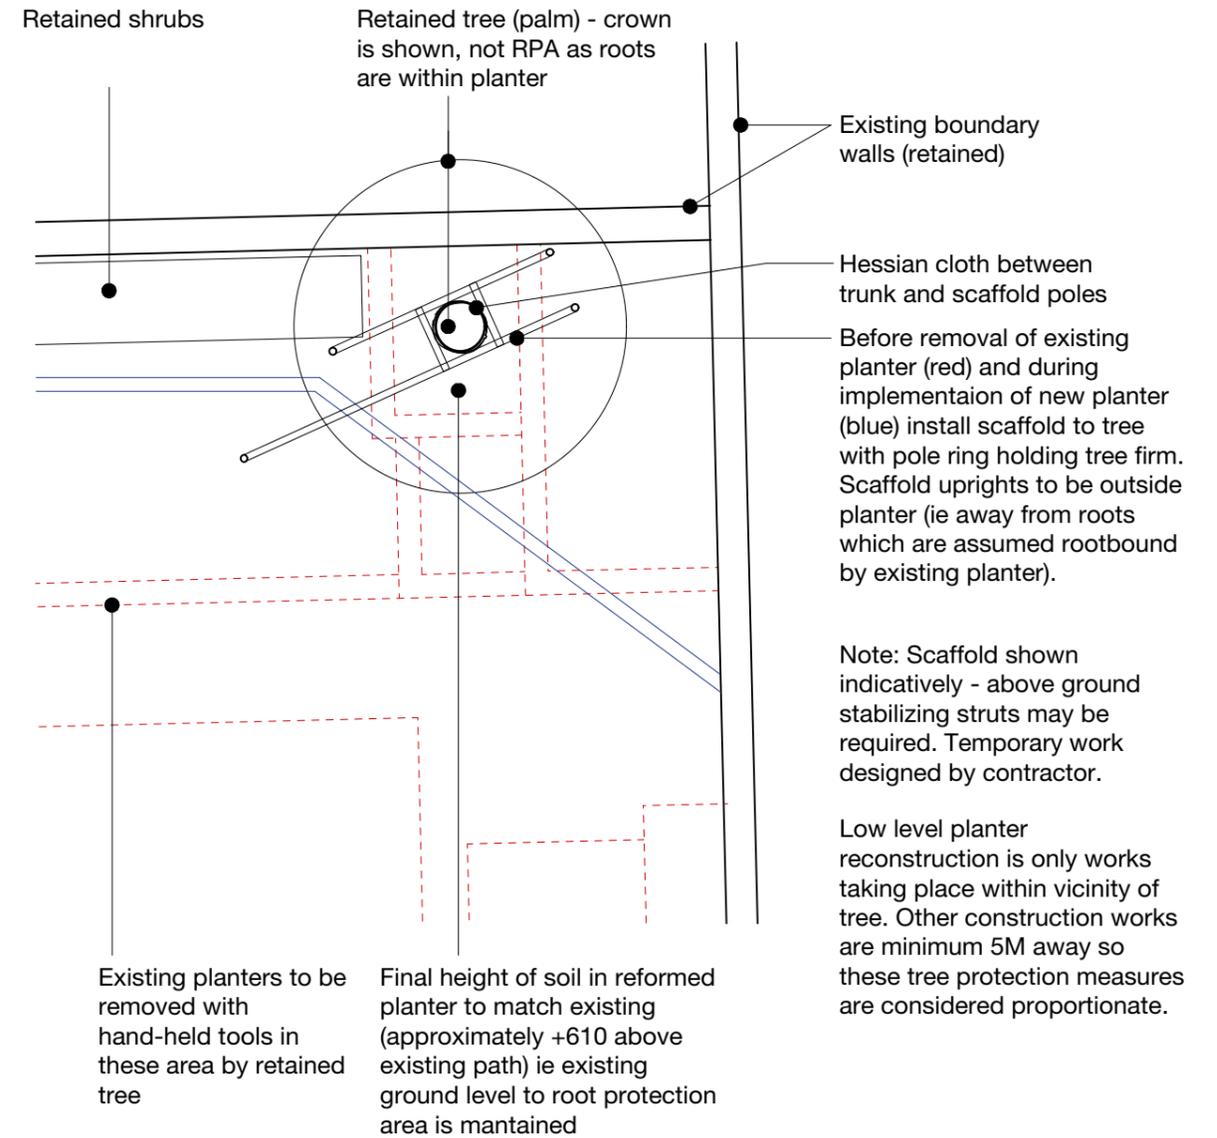

2 Plan of protection to retained tree
Scale: 1:50

Issued for discharge of planning condition no.4 application reference 2021/5947/P

Do not scale