



CIVIL & STRUCTURAL CONSULTING ENGINEERS

LONDON • MIDLANDS • EAST ANGLIA • MANCHESTER • GREECE

## Basement Impact Assessment

### 20-21 King's Mews

### London WC1N 2JB



## Project Ref L15/284/12 – Rev **BC**

### JMS Engineers Consulting Group Ltd

#### JMS Midlands

Victoria Court, 25 Tennant Street, Nuneaton, Warwickshire CV11 4LZ Tel: 02476 350505

#### JMS East Anglia

Unit 10, Brightwell Barns, Waldringfield Road, Brightwell, Suffolk IP10 0BJ Tel: 01473 487250

#### JMS London

150 Minories, City of London EC3N 1LS Tel: 0207 347 5239

#### JMS Manchester

204 Bolton Road, Worsley, Manchester M28 3BN Tel: 0161 790 4404 • 79 Thomas Street, Manchester M4 1LQ Tel: 0161 883 2909

#### JMS Greece

27 Arapitsas Street, Sykies, Thessaloniki, 56626 Greece Tel: 0030 2310 960636

Registered office: 100 Long Street, Atherstone, Warks CV9 1AP Registered No. 9119667 England

[www.jmsengineers.co.uk](http://www.jmsengineers.co.uk)





## Preamble

This report has been prepared by JMS Consulting Engineers I Ltd. on the instructions of, and for the sole use and benefit of, the Client.

JMS Consulting Engineers Ltd. shall not be responsible for any use of the report or its contents for any purpose other than that for which it was prepared and provided. If the Client wishes to pass copies of the report to other parties for information, the whole of the report should be copied. No professional liability or warranty is extended to other parties by JMS Consulting Engineers Ltd. as a result of permitting the report to be copied or by any other cause without the express written agreement of JMS Consulting Engineers Ltd.

- Structural stability analysis has been provided by JMS Engineers (London) Ltd  
Structural Engineer - P Hansen MStructE
- Surface flow & flooding analysis has been provided by JMS Engineers (East Anglia) Ltd  
Civil Engineer - R Wigzell MICE
- Damage Assessment & Ground Movement provided by JMS Engineers Ltd  
Structural Engineer - D Staines MStructE
- Hydrology & Ground Water Assessment provided by ESI Ltd  
~~Hydrologist~~ Hydrologist - T Taylor

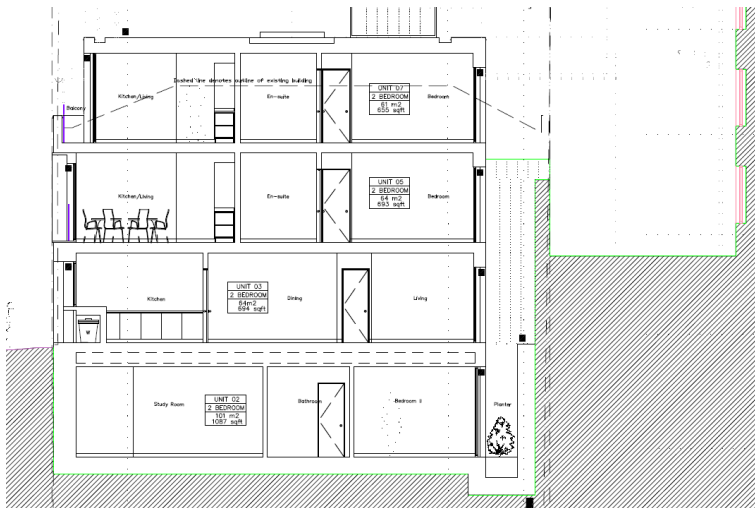

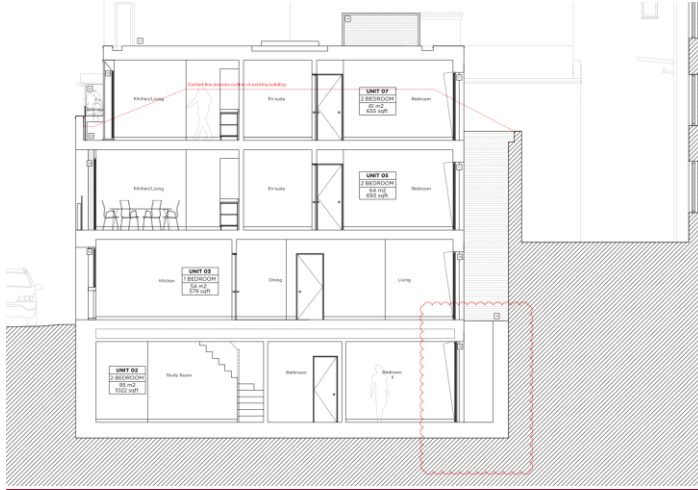

## Contents

Section	Item.	
	Preamble	Page 2
	Contents	Page 3
1.0	Introduction	Page 4
2.0	The Site & Area	Page 5
3.0	Site Geology	Page 8
4.0	Hydrology	Page 11
5.0	CPG4 Screening Flowcharts	Page 12
6.0	Scoping	Page 19
7.0	Structural Damage	Page 20
8.0	Construction Method Statement	Page 21
9.0	Ground Movements	Page 26
10.0	Damage <del>Assesment</del> <u>Assessment</u>	Page 28
11.0	Conclusion	Page 31

[Appendix A – Site Trial Hole information](#)

[Appendix B – Site Borehole Information](#)

## 1.0 INTRODUCTION

- 1.1 This report has been prepared to set out the proposed design philosophy and construction method statement for the proposed basement construction at 20 – 21 King’s Mews London. WC1N 2JB. It will summarise the basis of the structural and civil engineering design and will be issued to all relevant parties including the Client, Local Planning Authority and Design team members.
- 1.2 The proposal is for the partial demolition of two storey existing garage structure and the construction of a new building to provide 6 flats over 3 floors plus a basement.
- 1.3 The report is based on the information produced by Marek Wojciechowski. and is intended to provide the basis for planning and may be subject to further design discussion and development with the successful Contractor.
- 1.4 This report is for the exclusive use of the Client and should not be used in whole or in part by any third parties without the express permission of JMS Consulting Engineers Ltd. in writing.
- 1.5 This report should not be relied upon exclusively by the Client for decision-making purposes and may require reading with other material or reports.

Formatted: Superscript

1.6 The work carried out comprises a Basement Impact Assessment, which is in accordance with the procedures specified in the London Borough of Camden Planning Guidance CPG4, and a Construction Method Statement. The aim of the work is to assess if the proposed basement will have a detrimental impact on the surroundings with respect to groundwater and land stability and in particular to assess whether the development will affect the stability of neighbouring properties, local and regional hydrogeology and whether any identified impacts can be appropriately mitigated by the design of the development.

1.7 The conclusions and recommendations made in this report are limited to those that can be made on the basis of the research carried out. The results of the research should be viewed in the context of the work that has been carried out and no liability can be accepted for matters outside of the stated scope of the research. Any comments made on the basis of information obtained from third parties are given in good faith on the assumption that the information is accurate. No independent validation of third party information has been made by JMS Engineers Ltd.

1.8 This report (Rev B) has previously been reviewed by Campbell Reith Hill LLP under their Ref 12336-54 BIA and is now updated to address proposed the project revisions and clarification of site information summarised as:

Formatted: Indent: Left: 1.27 cm, Right: 0 cm, Space After: 10 pt, Line spacing: Multiple 1.15 li, No bullets or numbering, Widow/Orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted: Font: (Default) +Body (Calibri), 11 pt

1.8.1 Omission of the rear plant trough which reduces the excavation and underpinning requirements to the rear of the site and the boundary with the properties 53-55 Grey's Inn Road

Formatted: Font color: Auto, Pattern: Clear

Formatted: Font color: Custom Color(RGB(34,34,34))

1.8.2 Demolition of the existing Party Wall with No 22 King's Mews which negates the consideration of potential disturbance of this wall

Formatted: Indent: Left: 1.27 cm, Right: 0 cm, Space After: 10 pt, Line spacing: Multiple 1.15 li, No bullets or numbering, Widow/Orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

1.8.3 Additional foundation and soil information resulting from free access to the site which was previously unable

Formatted: Font: Bold

Formatted

Formatted: Font color: Auto, Pattern: Clear

Formatted: Font: Bold

Formatted: Font color: Auto, Pattern: Clear


Formatted: Font color: Auto, Pattern: Clear

Formatted: Indent: Left: 1.27 cm, Hanging: 0.71 cm


1.7.1.9 All these revisions reduce the impact of the construction on the site and surrounding properties but for completeness are included below and indicated by a red line in the margin of the report.

## 2.0 THE SITE & AREA

2.1 King's Mews lies within the Holborn & Covent Garden ward of the London Borough of Camden.

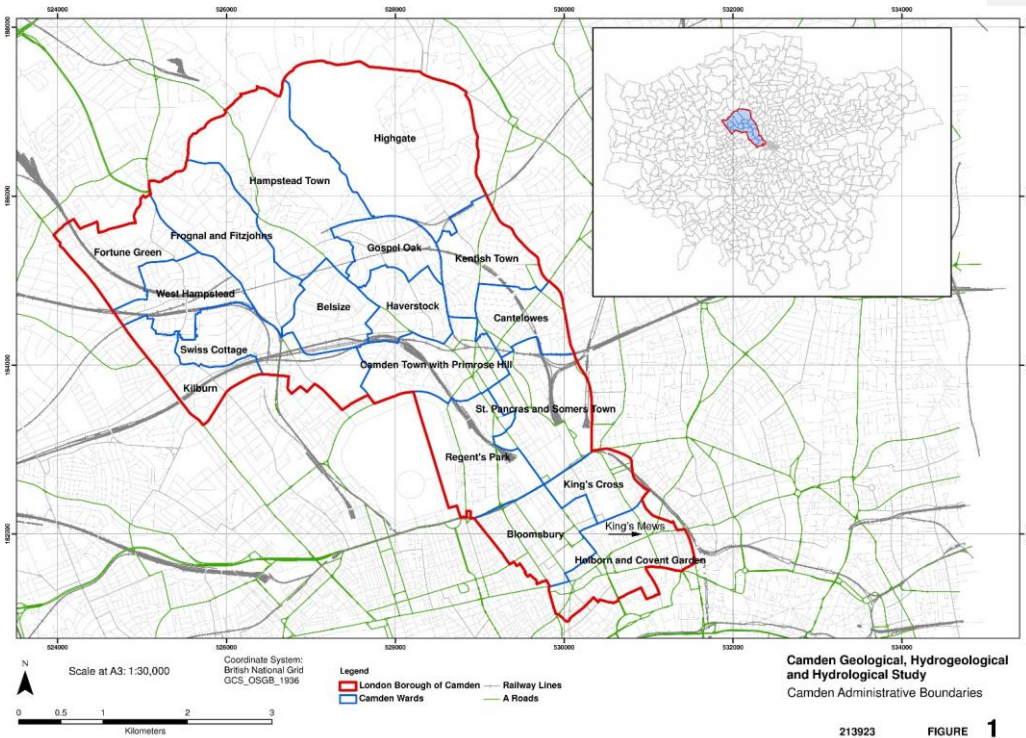

213923 FIGURE 1

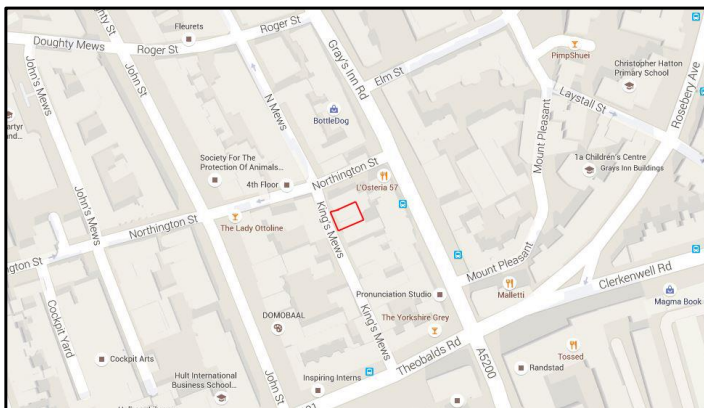

© Google

## 2.2 Site History

Not to be confused with King's Mews, Charing Cross, where the National Gallery now stands, it is in the south-east of Bloomsbury, running north from King's Road to Little James Street and lays in part of the Doughty Estate. It was developed towards the end of the eighteenth century; it appears on Horwood's map of 1799, but not on Rocque's map of 1746 which shows gardens in this area. It was named as the Mews for King's Road. Horwood's map of 1819 shows the buildings as non-residential and unnumbered. In 2008 many of its old mews buildings were demolished and replaced with luxury apartments. The Doughty estate in the south-east of Bloomsbury was part of extensive lands owned by the Doughty and Tichborne families, mainly outside London (Survey of London, vol. 24, 1952). Its proximity to the Foundling Estate meant that in the late eighteenth century it was involved in exchanges of land to enable the Foundling Estate to connect its new residential developments with the rest of London (Survey of London, vol. 24, 1952). This also prompted the Doughty estate owners to begin developing their land (Survey of London, vol. 24, 1952). The estate is sometimes also known as the Brownlow–Doughty estate, after William Brownlow, who built the streets in the late seventeenth century, and Elizabeth Brownlow, who had married into the Doughty family. In 1867 the estate was embroiled in the celebrated Tichborne case, when a claimant came forward asserting his identity as Sir Roger Charles Doughty-Tichborne, which would have entitled him to the Doughty estate in Bloomsbury along with other property (Oxford Dictionary of National Biography, entry for Tichborne claimant) . Sir Edward Doughty, né Tichborne, came into possession of the Doughty estate in 1826 from his cousin, Mrs Elizabeth Doughty, daughter of George Brownlow-Doughty and granddaughter of the fourth Baronet Tichborne; he changed his name to Doughty as a condition of the settlement (Gentleman's Magazine, vol. 193, May 1853) . Prior to this, it was Henry Doughty who had been negotiating land deals with the Foundling Estate on behalf of the Doughty Estate (Survey of London, vol. 24, 1952). The entire estate was sold off in 1921; Joseph Henry Bernard Doughty Tichborne, The Doughty Estate, Holborn (1921) has details and plans of the property included in the sale



A map of St. Andrews Holborn parish as well within the Liberty as without (1720)



A NEW PLAN of the CITY and LIBERTY of WESTMINSTER, Exhibing all the new Streets & Roads, with the Residences of the Principal Nobility, Public Offices, &c. Not extant in any other Plan.




Ancient maps of 1720 and 1754 which show the land undeveloped and in use as gardens but maps from the 1790s show the development of the area including King's Mews.





### 3.0 SITE GEOLOGY

3.1 The 1:50 000 scale geological map for this area, made available by the BGS, shows the site to be bedrock geology to be London Clay Formation comprising Clay, Silt and Sand. The superficial drift deposits are indicated as Lynch Hill Gravels and the ARUP report for LB Camden indicates a depth of circa 1.5 m in this location.

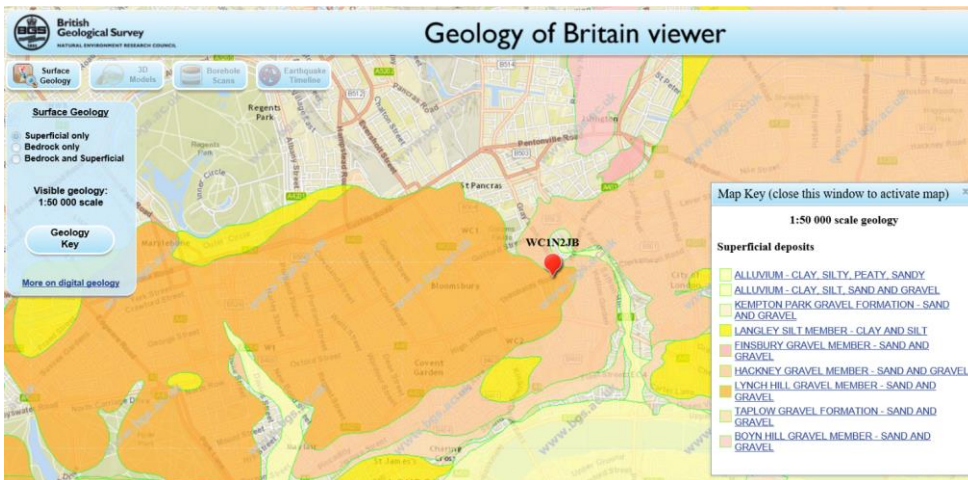


Contains British Geological Survey materials © NERC

3.2 The proposed construction of the basement will result in an unloading of the London Clay at formation level which will potentially result in an elastic heave and long term swelling of the London Clay. These movements will be mitigated to some extent by the applied structural loads but the basement floor slab will need to be designed to accommodate heave movements or suspended accordingly. This is supported by the LB Camden report produced by Arup.

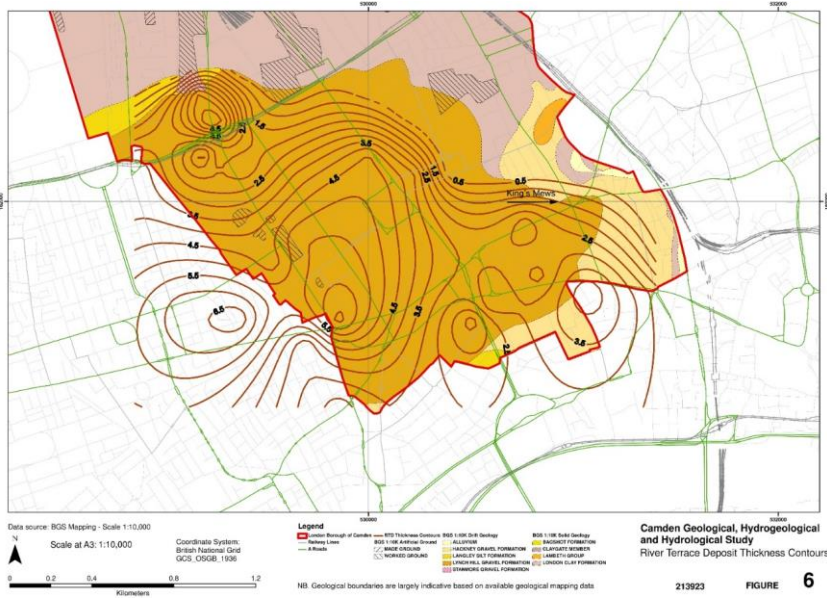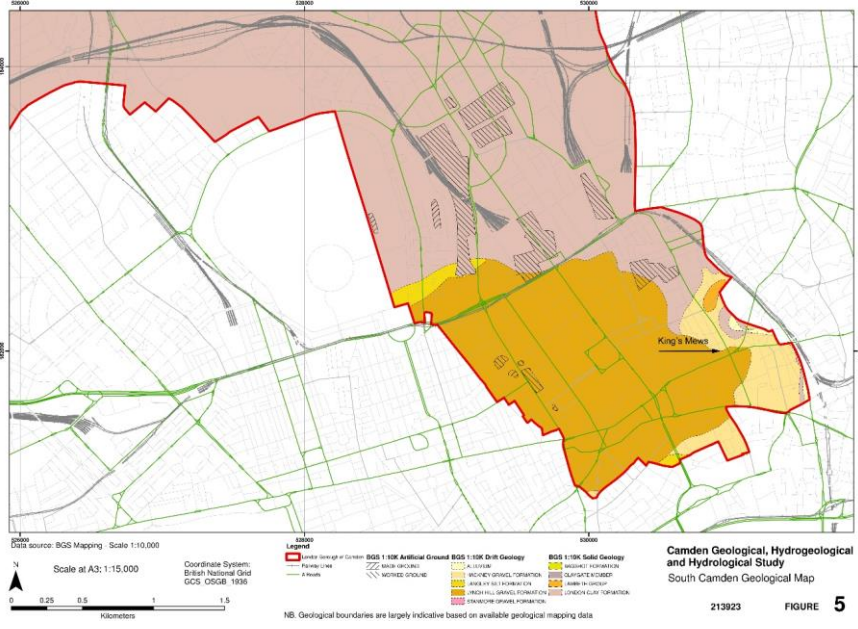

Historic Borehole records provide further support to the site geology as per the borehole record appended below which relates to a location to the North of this site and the recently obtained site boreholes appended as Appendix B.-

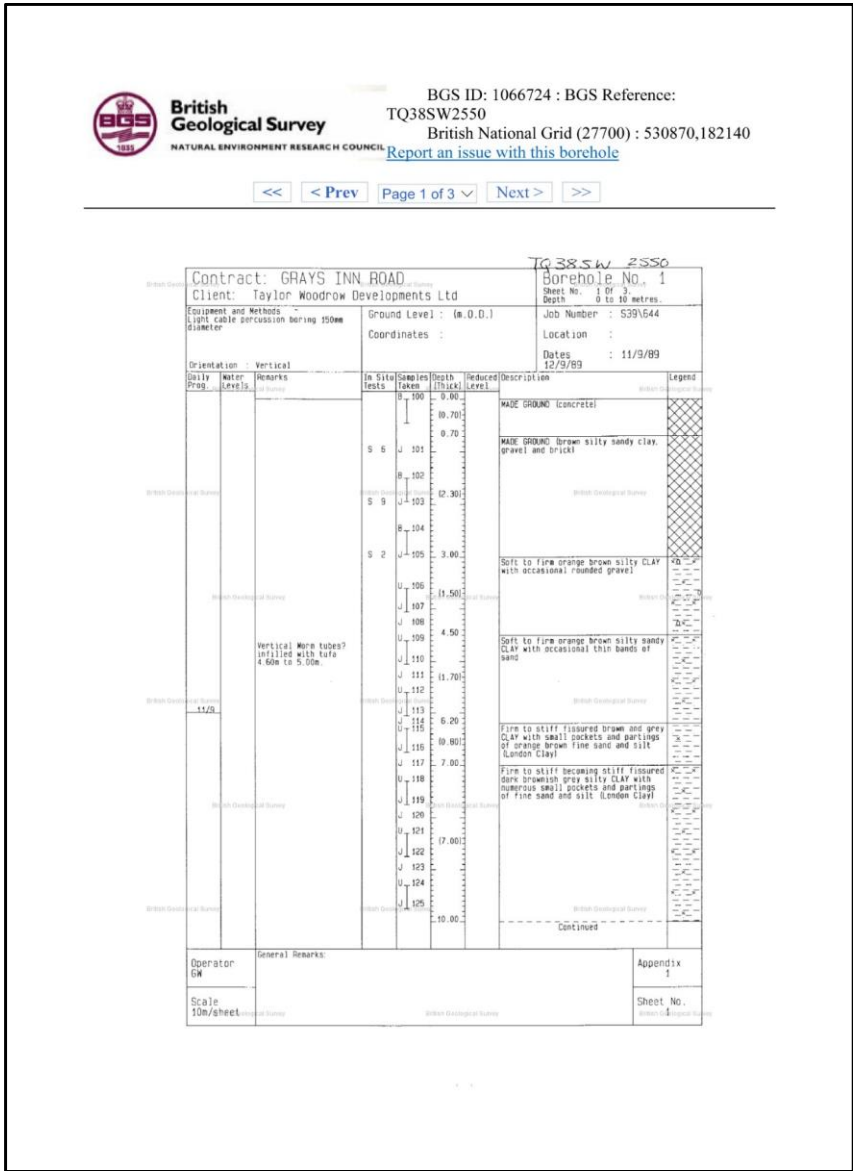

Contains British Geological Survey materials © NERC

4.0 **HYDROLOGY**

4.1 See attached report prepared by ESI Ltd ref Report reference: 64737R1D1, April 2016



## **Basement Impact Assessment: 20-21 Kings Mews, London WC1N 2JB**

---

### **Prepared for**

Phil Davies  
DDC Ltd  
77 Elmers End Road  
London  
SE20 7UU

**Report reference:** 64737R1D1, April 2016  
**Report status:** Draft

**Confidential**  
**Prepared by**  
**ESI Ltd**

New Zealand House, 160 Abbey Foregate, Shrewsbury, SY2 6FD, UK  
Tel +44(0)1743 276100 Fax +44 (0)1743 248600 email [info@esinternational.com](mailto:info@esinternational.com)  
Registered office: New Zealand House, 160 Abbey Foregate, Shrewsbury, SY2 6FD. Registered in England and Wales, number 3212832

## 5.0 CPG4 SCREENING FLOW CHARTS


5.1 For the purposes of this report reference has been made to Appendix E of the Arup document screening tools, which includes a series of questions within a screening flowchart for three categories;

- Groundwater flow - see report prepared by ESI Ltd ref Report reference: 64737R1D1, April 2016
- Land stability – See 5.2
- Surface water flow – See 5.3

### 5.2 Slope Stability (Fig 2)

1: Does the existing site include slopes, natural or man-made, greater than 7° (approximately 1 in 8)?

No. The LB Camden map of slope indicates the site is not greater than 1 in 8.

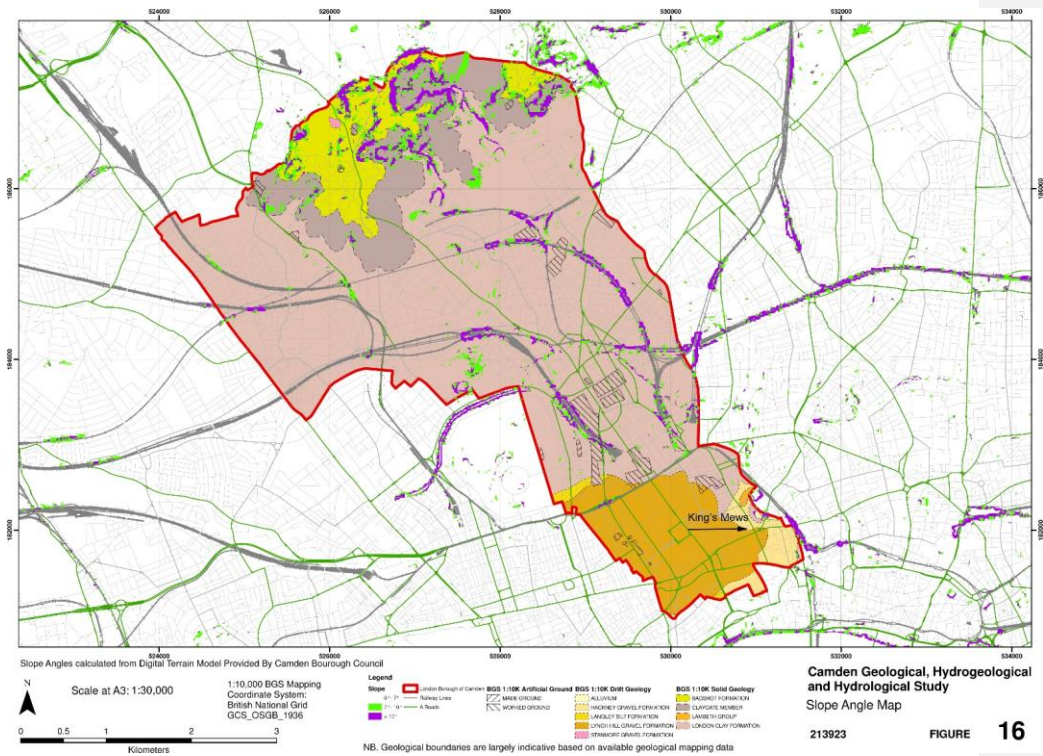



2: Will the proposed re profiling of landscaping at site change slopes at the property boundary to greater than 7° (approximately 1 in 8)?

No. The proposal does not include landscaping that affects the boundaries.

3: Does the development neighbour land, including railway cuttings and the like, with a slope greater than 7°?

No. The neighbouring sites are at a similar gradient.

4: Is the site within a wider hillside setting in which the general slope is greater than 7° (Approximately 1 in 8)?

No. The wider gradient is less than 1:8.

5: Is London Clay the shallowest stratum on the site?

Yes. London Clay is the shallowest stratum – carry forward to scoping stage.

6: Will any trees be felled as part of the proposed development and/or are there any proposed works within any tree protection zones where trees are to be retained?


No. No trees are to be felled.

7: Is there a history of shrink swell subsidence in the local area and/or evidence of such effects at the site?

No. There is no such evidence to the existing building or neighbouring properties.

8: Is the site within 100m of a watercourse, or spring line?

No. Map 12 of the LB Camden report produced by ARUP indicates no such features within 100 metres.

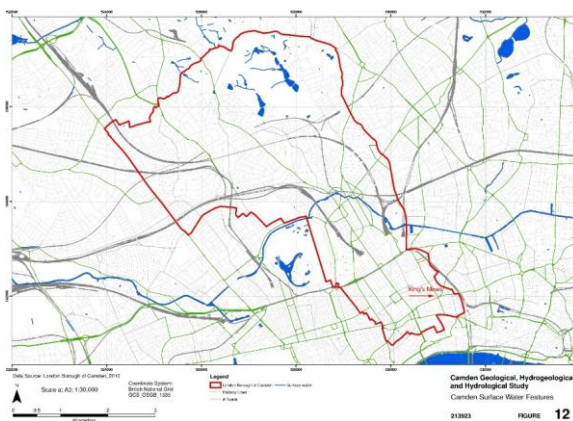




9: Is the site within an area of previously worked ground?

No. Historic records indicate that the site has only been built on in the late 18<sup>th</sup> Century & was built on land with an agricultural or horticultural use prior to that.

10: Is the site within an aquifer? If so, will the proposed basement extend beneath the water table such that dewatering will be required during construction?

Yes – the site lays within an area considered to be secondary aquifer.

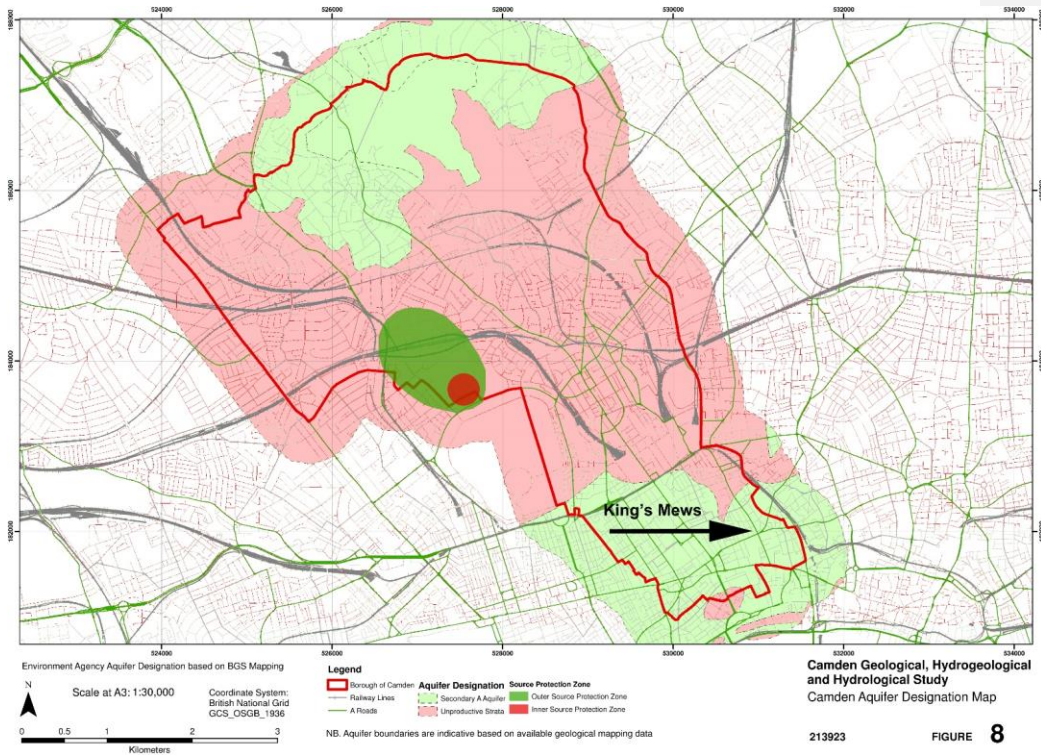

11: Is the site within 50m of the Hampstead Heath ponds?

No. The site is outside of a 50m zone of the ponds.

12: Is the site within 5m of a public highway or pedestrian right of way?


Yes it abuts the public highway. Carry forward to scoping stage

13: Will the proposed basement significantly extend the differential depth of basements relative to neighbouring properties?

Yes. The proposed basement does not abut existing cellars. – carry forward to scoping stage.

14: Is the site over (or within the exclusion zone of) any tunnels, e.g. railway lines?

No – see LB Camden Critical Infrastructure Map below:

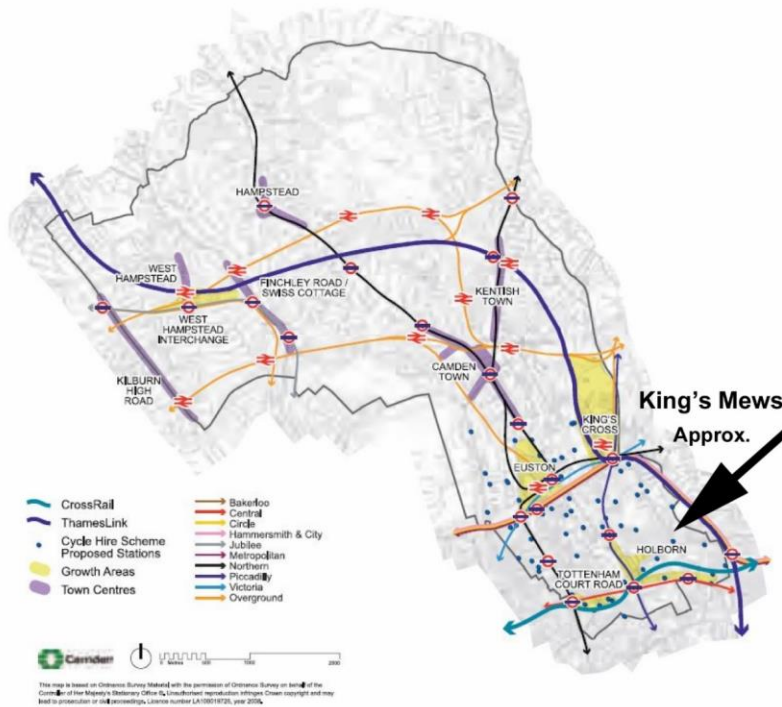

Source - London Borough of Camden, January 2010. *Camden Core Strategy Proposed Submission*.

### Camden Geological, Hydrogeological and Hydrological Study Transport Infrastructure

213923

FIGURE 18

### 5.3 Surface Flow and Flooding Fig 3

1: Is the site within the catchment of the pond chains on Hampstead Heath?

No. The site is outside the catchment area.

2: As part of the proposed site drainage, will surface water flows (e.g. volume of rainfall and peak run off) be materially changed from the existing route?

No. It will be largely unaffected.

3: Will the proposed basement development result in a change in the proportion of hard surfaces/paved external areas?

No. The amount and proportion of hard standing areas will remain unchanged

4: Will the proposed basement result in changes to the profile of the inflows (instantaneous and long term) of surface water being received by adjacent properties or downstream watercourses?

No. There will be no change in the surface water flow off-site as a result of this proposal. Surface water will be discharged via existing connection.

5: Will the proposed basement result in changes to the quality of surface water being received by adjacent properties or downstream watercourses?

No. There will be no change in the surface water flow off-site as a result of this proposal.

6: Is the site in an area known to be at risk from surface water flooding, such as Hampstead Heath, Gospel Oak and King's Cross, or is it at risk from flooding, for example because the proposed basement is below the static water level of a nearby surface water feature?

No the ARUP report identifying the areas affected by the two major flood events modelled indicate this location to have been unaffected. See fig below:


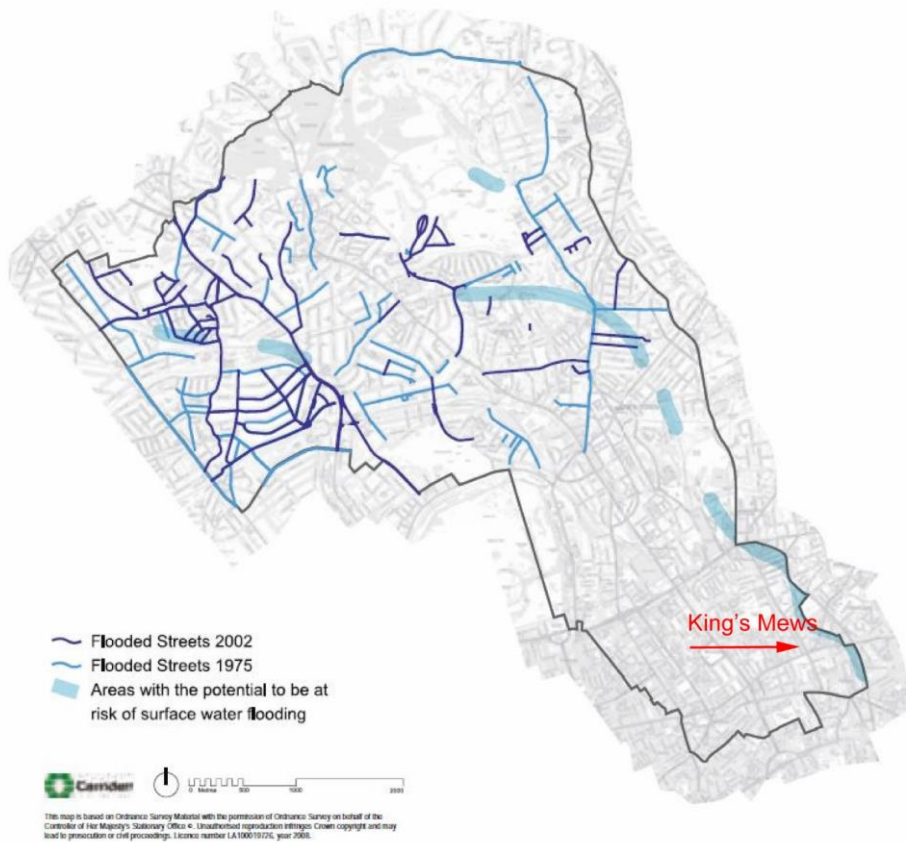


Figure 5 from Core Strategy, London Borough of Camden

### Camden Geological, Hydrogeological and Hydrological Study Flood Map

213923

FIGURE 15

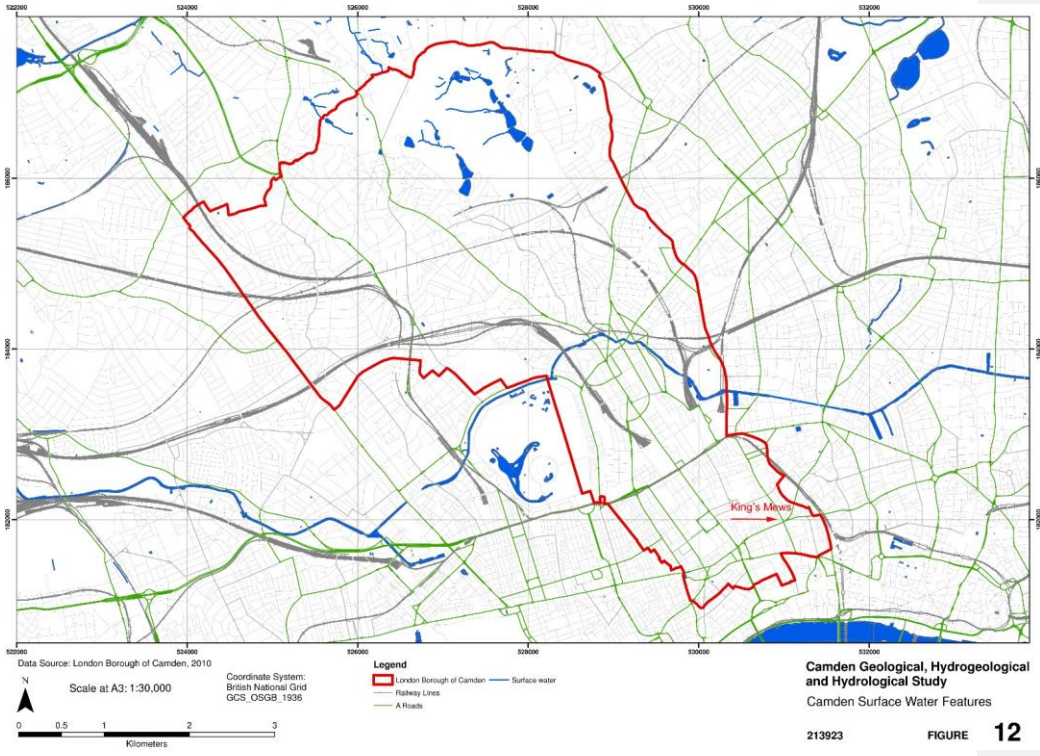



Formatted: Superscript

## 6.0 SCOPING STAGE

The purpose of scoping is to assess in more detail the factors to be investigated in the impact assessment. Potential consequences are assessed for each of the identified potential impact factors.

It is considered that the scope of the investigation complies with the guidance issued by the Council and is therefore a suitable basis on which to assess the potential impacts

### 6.1 Groundwater Flow


This is addressed within the independent report on hydro-geology and should be read in association with this report. Please see attached report prepared by ESI Ltd ref Report reference: 64737R1D1, April 2016

### 6.2 Slope Stability

- (5) London Clay is the shallowest stratum on this site and the structural design of the retaining walls and slabs will take this into account accordingly.
- (10) The site lies within an area identified as a secondary aquifer. The nearby bore-hole records suggest that the water table is lower than the basement and its associated works .
- (12) The existence of basements in some of the adjoining building has been recorded (No 19 King's Mews) but is presumed to be absent in others. However, the structural engineering proposal for this scheme involves the use of underpinning to form the structural box below ground which should have no negative effect on neighbouring properties. The isometric below summarises the existing situation (the front wall omitted for clarity).

Formatted: Font: Italic

Formatted: Centered

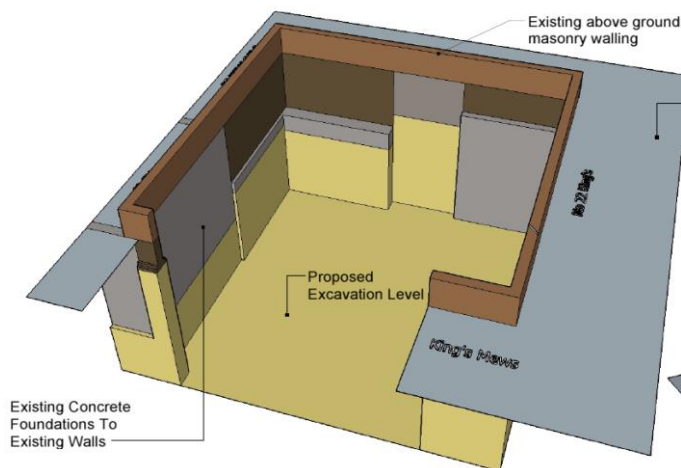



Formatted: Superscript

## 7.0 STRUCTURAL DAMAGE

7.1 By installing adequate temporary propping and new permanent works, the anticipated movements caused by the development it is predicted that the damage to the adjoining and nearby structures would generally be Category 0 (negligible), with limited areas of Category 1 (Very Slight) damage to the front right hand corner of the building/party wall due to differential movement from inconsistent loadings. On this basis, the damage that would inevitably occur as a result of such an excavation would fall well within the acceptable limits and to be limited to not exceed 2mm at any location within the adjacent properties.

Defined by Burland, and may include some or all of the following:-

- slight cracks, easily filled,
- redecoration probably required,
- several slight fractures showing inside of building,
- cracks visible externally, some re-pointing required externally to ensure weather-tightness,
- doors and windows may stick slightly.

7.2 For predicted damage assesment, refer to sections 9 & 10

## 8.0 CONSTRUCTION METHOD STATEMENT

This method statement has been prepared to provide information on the likely methods for Basement Construction for the Basement, subject to confirmation of details and final input from the successful contractor. The final methods will be subject to the limitations and constraints noted in this document. Any revised matters associated with the Method Statement will be issued for review and comment prior to any site construction works.

### 8.1 Prior to Commencement of Work

- 8.1.1 The method of construction is to be agreed by all parties, with specific reference to the potential for vibrations and noise from the underpinning process.
- 8.1.2 A detailed method statement for means of access, site logistics and intended vehicle movements, particularly spoil removal, will be agreed with the main contractor prior to commencing any site works and any variations reported accordingly.
- 8.1.3 Agreed working zones in relation to the Highways will be agreed prior to commencing any site works.
- 8.1.4 All services surveys, diversion agreements and temporary supply requirements will be agreed and approvals will be in place prior to commencement of works.
- 8.1.5 Existing building condition surveys of neighbouring property will be carried out prior to commencing any piling works,.

### 8.2 Sequence of Work

The key stages forming the core of the Construction Method Statement are :

#### 8.2.1 Establish site access & hoarding.

The hoarding will be located around the property to enclose all works. All set up works to facilitate access will take account of the Method Statement for the project. A plywood hoarding will be erected with vertical standards, anchored to the ground. The hoarding will be fully secure with a lockable door for access. Suitable heights and colours will be in accordance with the Local Authority requirements.

#### 8.2.2 Investigatory works as required for full detailed design.

Investigatory works have been undertaken in relation to the site and are recorded on drawing L15/284/12 – 507 and the borehole information contained in Appendix B. ~~have been limited by the ongoing use of the full footprint of the site and the results of trial holes which have been excavated are recorded in Appendix A.~~ These exploratory works have been supplemented by a desk study, incorporating a review of geotechnical and hydrogeological maps for the local area, and also of historical ordnance maps.

Boreholes undertaken on adjacent sites including 10/11 Kings Mews opposite, 25 Kings Mews and John Street have identified similar Ground Conditions generally consisting of:

- Made Ground, comprising silty sand, silty sandy clay, gravel, brick, concrete and coal fragments, extending to a depth of 3-4m below ground level. (Also as found on site trial pits)
- Lynch Hill Gravel, comprising slightly clayey sandy fine to coarse sub rounded to angular gravel, extending to a depth of approximately 6m below ground level
- London Clay, proven to depth

Copies of BGS Borehole logs are contained in Appendix B of the Hydrology Report of ESI

### 8.3 Construction Method

- ~~After removal of existing concrete ground floor slab, piling using CFA techniques will be undertaken from existing ground level with piles stopped approximately 300mm above final cut-off level.~~
- ~~Excavation to underpins to occur in the sequence specified on JMS drawing L15/284/12 – 501A 601-604 Rev A with stage excavations, underpinnings and propping to ensure minimal impact on adjacent buildings. Stage 1, at half the final basement level (approximately 1.90m deep). Underpinned bays to be packed and backfilled once the underpin has been completed sufficiently to support the wall above.~~
- ~~Once all bays have been completed at Stage 1, excavation to final basement level to occur in the sequence specified on drawing JMS L15/284/12 – 502A Stage 2. Underpinning Bays to occur in a staggered position comparing to Stage 1 Underpinning Bays. Underpinned bays to be packed and backfilled once the leg of underpinning has been completed sufficiently to support the underpin above.~~
- ~~Excavation to final formation level installing suitable propping will be undertaken~~
- ~~Use of Kitten Pile Rig (or similar) and commencement of piling from basement formation level as shown on JMS drawing L15/284/12 – 501A Stage 1.~~
- Construction of new Basement's slab and Retaining Walls and ground floor structure

- The final sequence of working in detail will be agreed with the successful main contractor and any variations reported accordingly. The foregoing is an indication of the likely process for the substructure works, subject to completion of all intrusive surveys, all agreements being in place and selection of the agreed final construction process subject to those intrusive site findings.

## 8.4 Ground Model

### 8.4.1 Basement Retaining Walls

The following parameters are suggested for the design of the permanent basement retaining walls.

Stratum	Bulk Density (kg/m <sup>3</sup> )	Effective Cohesion (c'-kN/m <sup>2</sup> )	Effective Friction Angle (O'- degrees)
Made Ground	1800	0	27
Lynch Hill Gravel	1850	0	32
London Clay	2000	0	25

~~Although not encountered in the trial pits, based on the adjacent site information, G~~groundwater is likely to ~~be~~ encountered within the ~~recent boreholes as recorded on the logs and will encroach on the~~ lower parts of the ~~proposed~~ excavation. ~~S~~ and the installation of standpipes for monitoring ~~should water-~~ ~~levels have already been~~ established ~~at the earliest opportunity~~ in order to establish equilibrium levels. Consideration ~~should will~~ be given to the risk of groundwater and surface water collecting behind the retaining walls and ~~unless a fully effective drainage system can be ensured it would be prudent to it is~~ assumed a design water level equivalent to two-thirds of the retained height. The advice in BS8102:20096 should be followed in the design of the basement retaining walls and with regard to waterproofing requirements.

### 8.4.2 Basement Heave

The excavation of an approximately 3.50 m to 4.50 m thickness of soil will result in an unloading of between 65 kN/m<sup>2</sup> and 80 kN/m<sup>2</sup>. This unloading will result in heave of the underlying London Clay, which will comprise short term elastic movement and longer term swelling that will continue over a number of years. These movements will be mitigated to some extent by the remaining thickness of gravel and the pressure applied by the proposed building, although it is recommended that a more detailed analysis of the possible heave should be carried out once the basement design has been finalised.

### 8.4.3 Piled Foundations

Piled foundations should be considered, due to the ground conditions at this site and some form of bored pile is likely to be the most appropriate type in this situation. A conventional rotary augered pile may be appropriate, with temporary casing installed into the top of the clay in order maintain stability and prevent



perched groundwater inflows. Alternatively, the use of bored piles installed using continuous flight auger (cfa) techniques could be considered, which would not require the provision of temporary casing. The final choice of pile type will be largely governed by the access restrictions and working area, which at this site is very small and it is most likely that the use of mini piling techniques ~~will be required particularly as the rig will have to be lowered to basement level.~~

The following table of ultimate coefficients should be used for the preliminary design of bored piles:

<b>Ultimate Skin Friction</b>		<b>kN/m<sup>2</sup></b>
Made Ground	GL to 4.0m	Ignore (basement)
Lynch Hill Gravel	4.0m to 5.0m	25
London Clay (alpha = 0.5)	5.0 to 15m	Increasingly linearly from 40 to 100
<b>Ultimate End Bearing</b>		
London Clay	12.0m to 15.0m	Increasingly linearly from 1400 to 1800

Guidance from the London District Surveyors Association (LDSA) suggests that a factor of safety of 2.6 should be applied to the above coefficients in the computation of safe theoretical working loads. On the basis of the above coefficients and a factor of safety of 2.6, it has been estimated that a 300 mm diameter pile founding at a depth of 15 m below ground level, should provide a safe working load of about 275 kN. Specialist piling contractors should be consulted with regard to the design of a suitable piling scheme for this site.

#### 8.4.4 Basement Floor Slabs

Following the excavation, consideration should be given to suspending the slab over a void in order to accommodate heave movements and the requirement for heave protection should be reviewed once the proposed levels and loads are known. The slab is to be designed to withstand groundwater pressure and in accordance with BS8102, a design water level should be  $\frac{1}{3}$  of the depth of the excavation.

#### 8.4.5 Temporary Support to Underpinned Sections

It is anticipated that underpinning to deepen the existing foundations to the perimeter walls will be undertaken on a 'hit and miss' sequence, in a one or two stage sequence to be agreed with the temporary works engineer and under party wall agreement. Underpinning should be undertaken in short sections not exceeding 1.2 m in length, with no adjacent pin to be excavated until a minimum of 48 hours after the

adjacent pin has been cast and dry-packed placed, with the sides of the excavation adequately shored and propped. Horizontal props and/or flying shores are to be provided to resist horizontal forces and it is anticipated that steel temporary props will be used with strut forces spread along the wall by steel waling beams fixed to the concrete stools. Although the detail of the propping is to be finalised there is the option to use hydraulic 'active' props where the propping force is applied prior to excavation in order to minimise movement at critical locations.


#### 8.4.6 Permanent Works

When the final excavation depths have been reached, the permanent works will be formed and from the information provided these are understood to comprise reinforced concrete walls with a drained cavity lining supported off a reinforced concrete piled floor slab. Heave protection will be installed beneath the lowest level slab. Basement and ground floor slab are presumed to be of reinforced concrete and designed to act as permanent props to the vertically spanning walls. The superstructure is to be constructed off the piled basement and independent of the existing Party Walls.


## 9.0 GROUND MOVEMENTS

### 9.1 Summary of Proposed Works to Existing Walls/Boundaries

- The buildings adjacent to the left hand side of the site, (Nos. 3 & 5 Northington Street / 18-19 King's Mews) are structurally independent from No 20-21 and both have existing 'dry' basements as confirmed by the owner of No. 5 Northington St and the trial pits (see Appendix A). As the proposed works to No. 20/21 is independently supported and not extending to any significant depth below that of No 3 & 5 Northington St., these buildings will not be effected by the proposed basement works. The left hand flank wall of No 20 is not a party wall although is to be underpinned to allow construction of the new basement structure.
- The front elevation is currently largely open construction and is to be supported at first floor level in the proposed scheme and is not effected by the proposed works
- The rear elevation is a party wall and is to remain largely unchanged. Resistance to horizontal movement following the formation of the basement is to be via a new concrete wall set in front of the existing wall. It is proposed that the wall will be underpinned to basement depth to allow construction of the basement wall.
- ~~The right hand side elevation to No 22 is a currently a party wall and is to be removed prior to works starting. Ground levels are being reduced to the same basement depth and thus no retaining wall will be required. remain largely unchanged. Resistance to horizontal movement following the formation of the basement is to be via a new concrete wall set in front of the existing wall. It is proposed that the wall will be underpinned to basement depth to allow construction of the basement wall.~~
- Propping will be provided during the construction of the basement and in the permanent condition

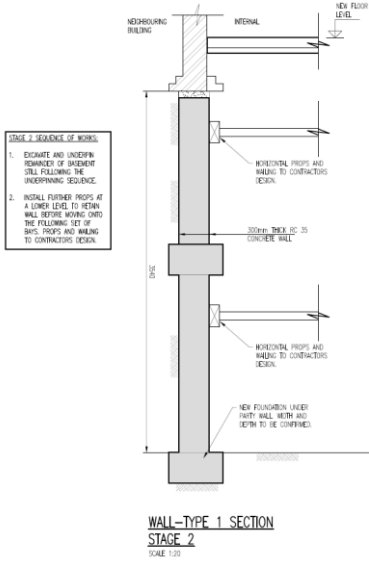

TEMPORARY STATE

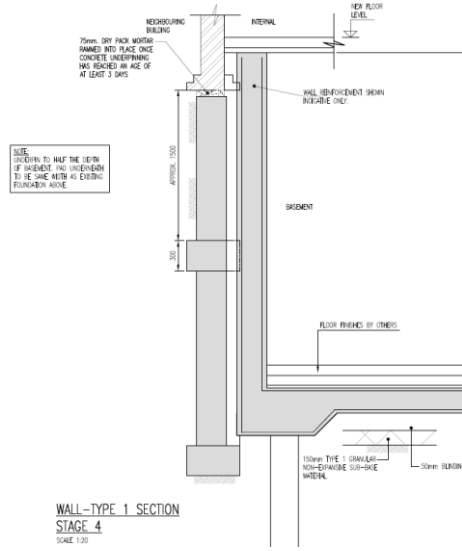

PERMANENT STATE

## 9.2 Ground Movements – Surrounding the Basement

On this site it is assumed that the mass concrete underpinning to deepen the existing side and rear walls will be of similar thickness as the walls above and with a footing of similar width. The increase in loading will be  $(24-18 \times 3.5\text{m}) = 21 \text{ kN/m}$  from the underpinning. However, this is offset by the reduction in load from the removal of the superstructure (1<sup>st</sup> Floor & Roof) which equates to approximately  $(4 \times [1.5+0.75]_{\text{live}} + [0.5+0.65]_{\text{dead}}) = 13.6 \text{ kN/m}$  i.e. a Net increase of  $(21-13.6) = 7.4 \text{ kN/m}$ . Such a nominal load increase will result in minimal settlement (i.e. less than 2mm).

Experience with respect to the construction of underpinned walls beneath existing structures, suggests that ground movements should remain typically within the range of 2 mm to 5 mm following completion of the works provided that they are installed by a reputable and experienced contractor in accordance with the guidelines published by the Association of Specialist Underpinning Contractors.

The estimated movements are considered to represent a worst case scenario, particularly as the movements resulting from basement excavation will be minimised due to control of the propping in the temporary works and a regime of monitoring

## 9.3 Movements within the Excavation (Heave)

At this site unloading of the London Clay will take place as a result of the basement excavation and the reduction in vertical stress will cause heave to take place. Values of stiffness for the soils at this site are readily available from published data and the creation of the basement will result in a net unloading of about approximately 45 kN/m<sup>2</sup>. Such a reduction would mean that by the time the basement construction is complete, approximately 12 mm of heave is likely to have taken place at the centre of the proposed excavations, reducing to less than 5 mm at the edges. In the long term, following completion of the basement construction, a further 8 mm of heave (at the centre) is estimated as a result of long term swelling of the underlying London Clay. It is, however, important to bear in mind that such figures are based on an unrestrained excavation as computer models are unable to take account of the mitigating effect of existing structures, the stiffness of the proposed floor slab, proposed underpins and the piles, which in reality will combine to restrict these movements within the basement excavation. The movements predicted at or just beyond the site boundaries are unlikely to be fully realised and should not therefore have a detrimental impact upon any nearby structures. In order to mitigate the effects of heave on the new building, the basement should be designed to transmit heave forces into the walls or onto tension piles within the basement. Alternatively, a void or layer of compressible material could be introduced beneath the slab designed to be able to resist the potential uplift forces generated by the ground movements. In this respect potential heave pressures to be accommodated are typically taken to equate to around 30% to 40% of the total unloading pressure.

## **10.0 DAMAGE ASSESSMENT**

### **10.1 Damage to Neighbouring Structures**

In addition to the above assessment of the likely movements that will result from the proposed development, some of the neighbouring structures have been considered as sensitive structures, requiring Building Damage Assessments, on the basis of the classification given in Table 2.5 of C580 .

The potential heave movements predicted have not been included in the assessment section 9.2, which can therefore be considered as conservative, as these movements are likely to have a mitigating effect on the downward settlement due to the increase in load.

Subsequently, it is predicted that the damage to the adjoining and nearby structures would generally be Category 0 (negligible), with limited areas of Category 1 (Very Slight) damage to the front right hand corner of the building/party wall due to differential movement from inconsistent loadings. On this basis, the damage that would inevitably occur as a result of such an excavation would fall well within the acceptable limits.

### **10.2 Monitoring of Ground Movements**

The predictions of ground movement should be checked by monitoring of adjacent properties and structures. Condition surveys of the above existing structures should be carried out before and after the proposed works. The precise monitoring strategy will be developed at a later stage and it will be subject to discussions and agreements with the owners of the adjacent properties and structures. Contingency measures will be implemented if movements of the adjacent structures exceed predefined trigger levels. Both contingency measures and trigger levels will need to be developed within a future monitoring specification for the works.

### **10.3 Waterproofing Systems and Screed**

For all basement areas, the Architect will prepare design details in conjunction with a specialist contractor. The waterproofing system will be installed in accordance with the Architects details in conjunction with the specialist contractor technical specifications once the basement slab is complete.

The floor finishes, which may include insulation and under floor heating, can then be laid in accordance with the Architects details. A cement and sand screed will be applied on the slab surface.

The height of the basement and relative level of the water table determines that Types A (barrier), B (structurally integrated) or C(drained) protection against ingress of water will be satisfactory, as defined by



BS 8102:2009. The basement will be constructed and detailed to achieve a Grade 3 Level of Performance, as defined by BS 8102:2009.

Table 2 Grades of waterproofing protection

Grade	Example of use of structure <sup>A)</sup>	Performance level
1	Car parking; plant rooms (excluding electrical equipment); workshops	Some seepage and damp areas tolerable, dependent on the intended use <sup>B)</sup> Local drainage might be necessary to deal with seepage
2	Plant rooms and workshops requiring a drier environment (than Grade 1); storage areas	No water penetration acceptable Damp areas tolerable; ventilation might be required
3	Ventilated residential and commercial areas, including offices, restaurants etc.; leisure centres	No water penetration acceptable Ventilation, dehumidification or air conditioning necessary, appropriate to the intended use

<sup>A)</sup> The previous edition of this standard referred to Grade 4 environments. However, this grade has not been retained as its only difference from Grade 3 is the performance level related to ventilation, dehumidification or air conditioning (see BS 5454 for recommendations for the storage and exhibition of archival documents). The structural form for Grade 4 could be the same or similar to Grade 3.

<sup>B)</sup> Seepage and damp areas for some forms of construction can be quantified by reference to industry standards, such as the ICE's *Specification for piling and embedded retaining walls* [1].

To achieve Grade 3 Performance we propose either a drained cavity installed in front of the concrete wall; or an applied waterproofing membrane applied and bonded to the internal faces of the piers. Waterproof concrete will also be employed.

## 11.0 Conclusion

The proposed re-development of 20-21 King's Mews can be achieved using standard construction techniques and materials. Where mechanical means are necessary to construct permanent works these can be of a type that generates low vibrations to which the surrounding buildings have a form and construction that is robust and resistant to. We can therefore conclude with confidence that the construction of the proposed development generally, and the subterranean basement in particular, will not affect the integrity of the surrounding building stock or overload the near-surface geology.


There are no critical utilities beneath the site that cannot be relocated easily to accommodate the construction and, as there is no change in use proposed there will be no significant increase in foul discharge to the sewer despite the increase in level of accommodation.

The techniques proposed for the subterranean element of the building and the nature of the underlying geology minimises the risk of instability, ground slip and movement.

The review of the proposals has concluded that the predicted damage to the neighbouring properties would generally be 'Negligible', with some limited areas of 'Very Slight' along the front right hand corner of the building. On this basis, the damage that would inevitably occur as a result of such an excavation underpinning, piling and subsequent excavation of the proposed basement, will in practice be separated by a number of weeks during which time construction will take place. This will provide an opportunity for the ground movements during and immediately after excavation to be measured and reviewed so that propping arrangements can be adjusted if required

On Behalf Of

JMS Consulting Engineers Ltd




Daniel Staines MStructE CEng BEng PgDip (Const. Management)

## Appendix A



Formatted: Superscript

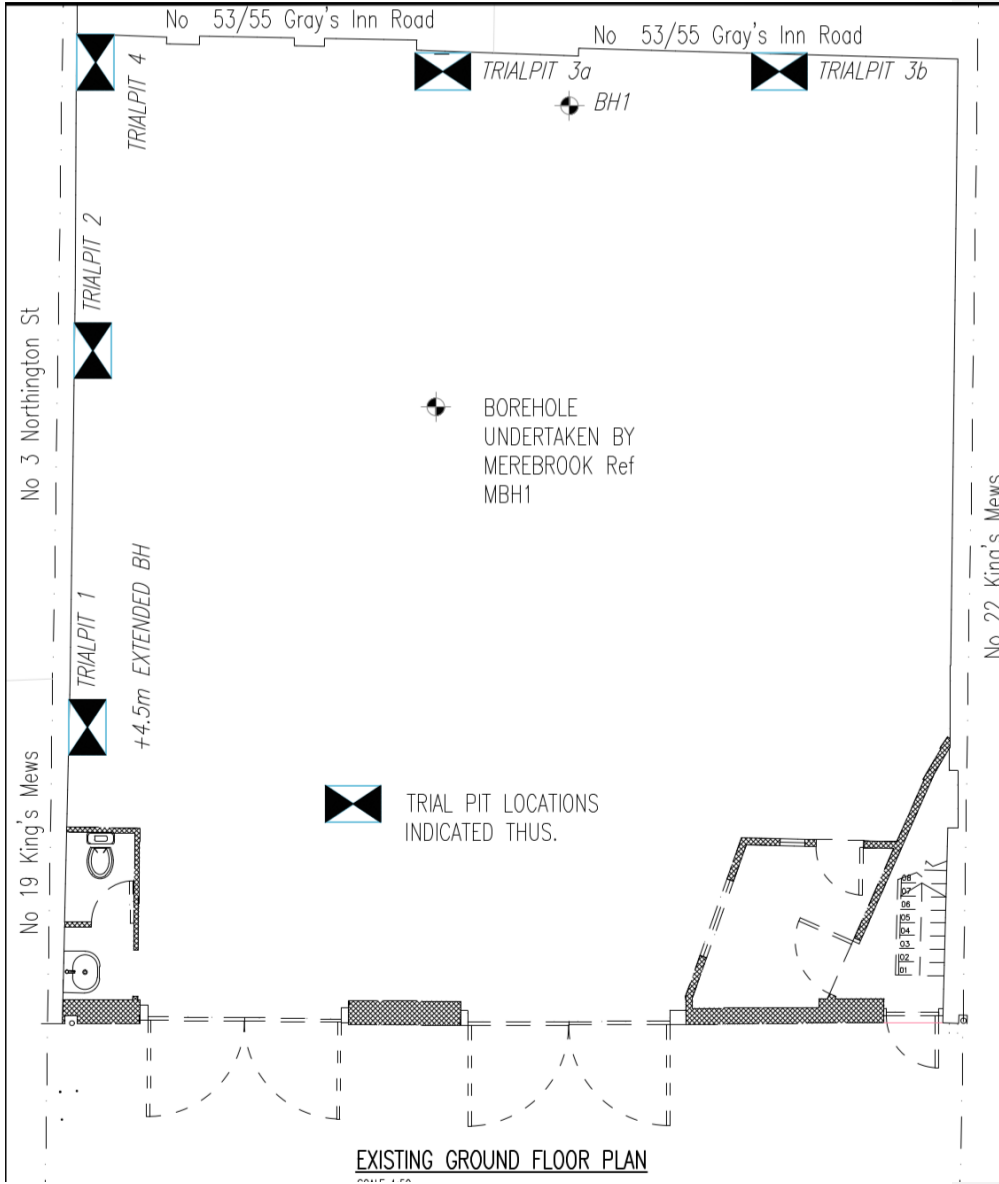

## Trial Hole Key Plan

(To Be Read In Conjunction With Drg L15/284/12 -507)

Formatted: Normal


### Appendix B

#### POINT DRILLING SERVICES

Birdsnest, Oakmead Road, St Osyth, Essex, CO16 8NL. Email: ylowther@aol.com  
Telephone: 01255 821004 Mobile 07771533402

SITE INVESTIGATION TRIAL PIT LOG	DATE: 24.3.16
----------------------------------	---------------

SITE ADDRESS: 20-21 KINGS MEWS HOLBORN	
TRIALPIT LOG REF: 2	DESCRIPTION:

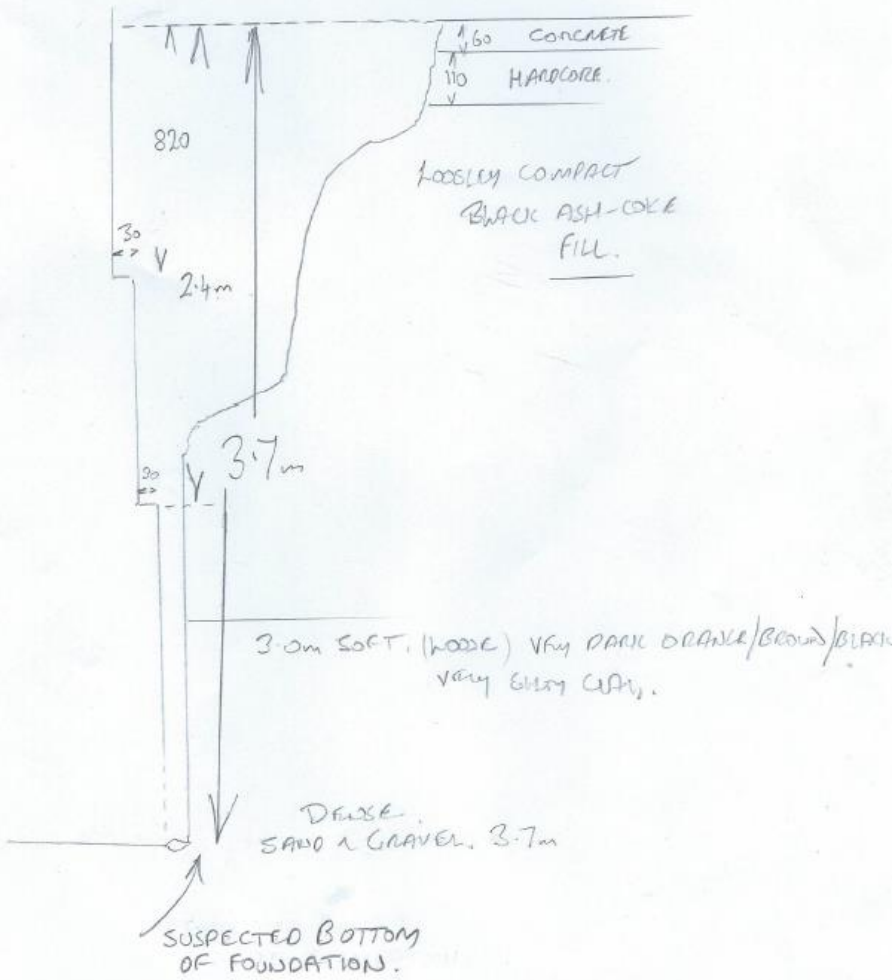

KEY.    DISTURBED SAMPLE.    V.VANE TEST.    MP. MACINTOSH PROBE TEST.    R.ROOT SAMPLE.




**POINT DRILLING SERVICES**

Birdsnest, Oakmead Road, St Osyth, Essex, CO16 8NL. Email: ylowther@aol.com  
 Telephone: 01255 821004 Mobile 07771533402

SITE INVESTIGATION TRIAL PIT LOG DATE: 24.3.16

SITE ADDRESS: 20-21 KINGS MEWS, HOLBORN.

TRIAL PIT LOG REF: 4 DESCRIPTION:

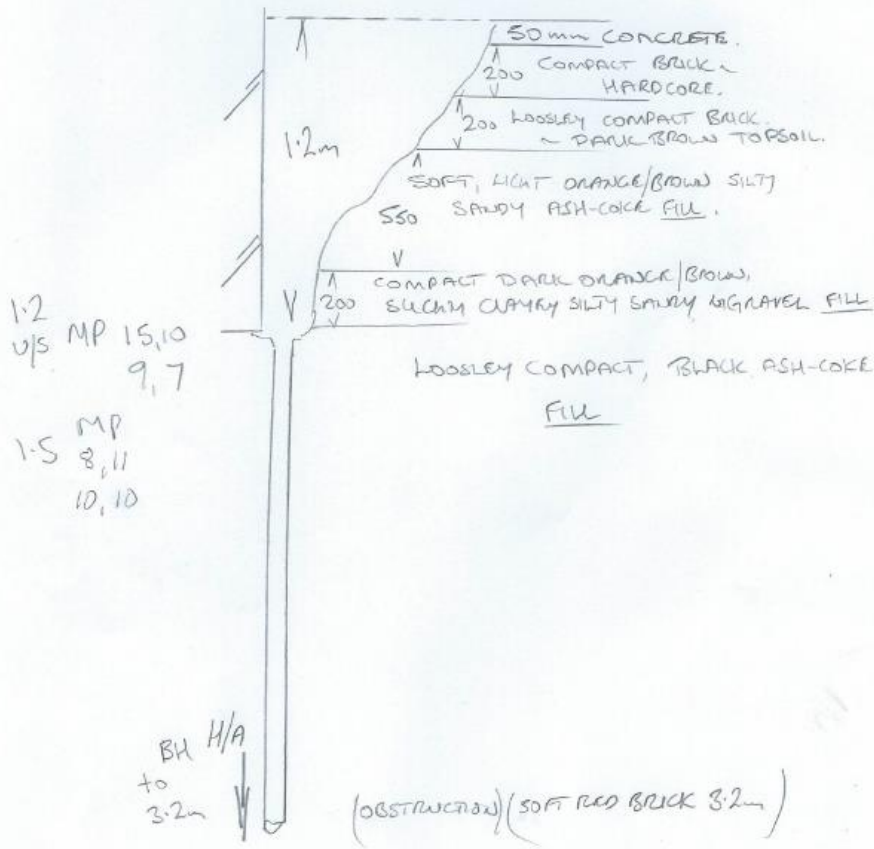

KEY . DISTURBED SAMPLE. V.VANE TEST. MP. MACINTOSH PROBE TEST. R.ROOT SAMPLE.

[See Ground Investigation Report](#)

[Report Reference Number: 2128,GI/GROUND/AH,SG/31-01-17/V1 Project Number: 2128,GI Issue Reference: 1](#)  
[Issue Date: 31 January 2017](#)



**PHASE 2 – GROUND INVESTIGATION REPORT  
FOR A PROPOSED RESIDENTIAL DEVELOPMENT  
AT  
20 KINGS MEWS, LONDON, WC1N 2JB**

Prepared For

City & Provincial Properties PLC  
C/O JMS Consulting Engineers  
Unit 10 Brightwell Barns  
Waldringfield Road  
Brightwell  
Ipswich  
IP10 0BJ

