


Door Type K


- Steel Palisade Door to match existing yard gate
- Automatic opening in case of fire
- Cardex controlled
- DE/40

Refer to drawing PK9\_130 for location

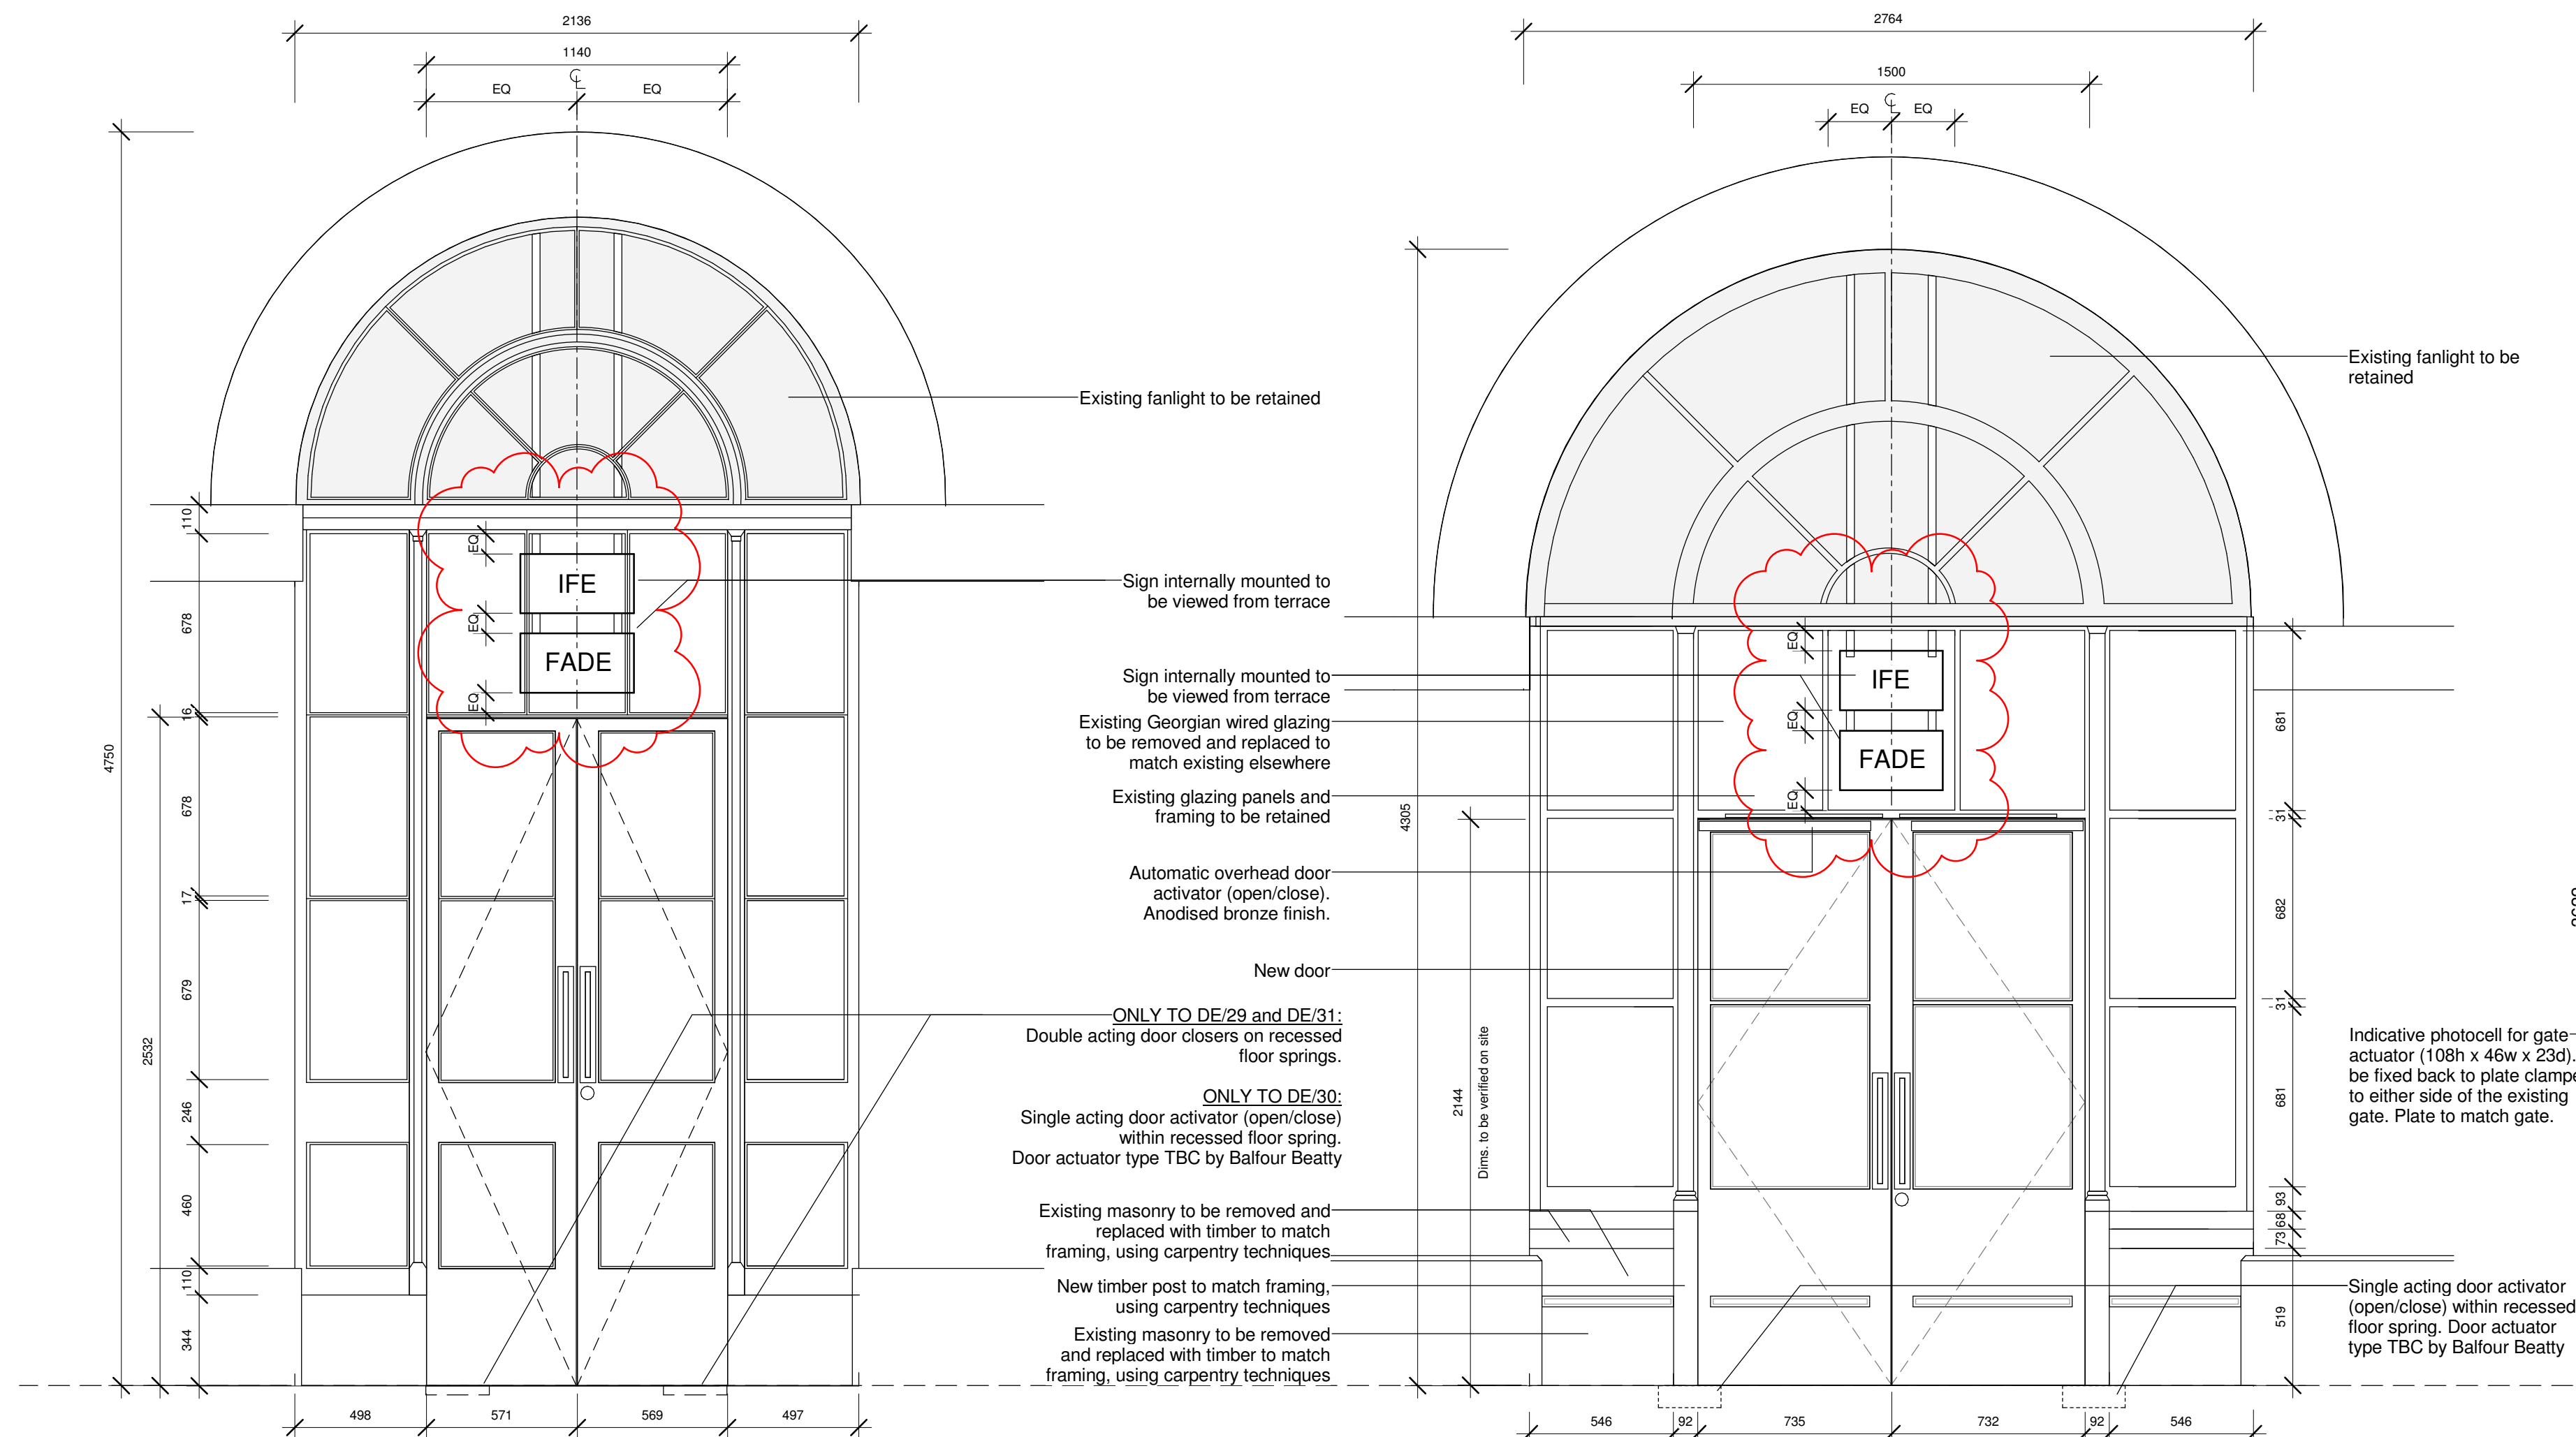

**Door Type D**  
Heritage Glazed Timber Doors to North Cloister.  
Frame profiles and beadings to match existing openings along North Cloisters.  
Ironmongery to match existing Wilkins North Cloisters doors.  
E/29, E/31 Double acting, double doors with recessed floor springs.  
E/30 Single acting, double doors, power assisted with floor recessed openers  
Refer to drawing PK9\_131 for location.

Door Type E  
Heritage Glazed Timber Doors to JBR.  
Frame profiles and beadings to match existing openings along JBR facade.  
Ironmongery to match existing Wilkins North Cloisters doors.  
DE/35 Single acting, double doors, power assisted with floor recessed door openers (automation by others).  
Refer to drawing PK9\_131 for location

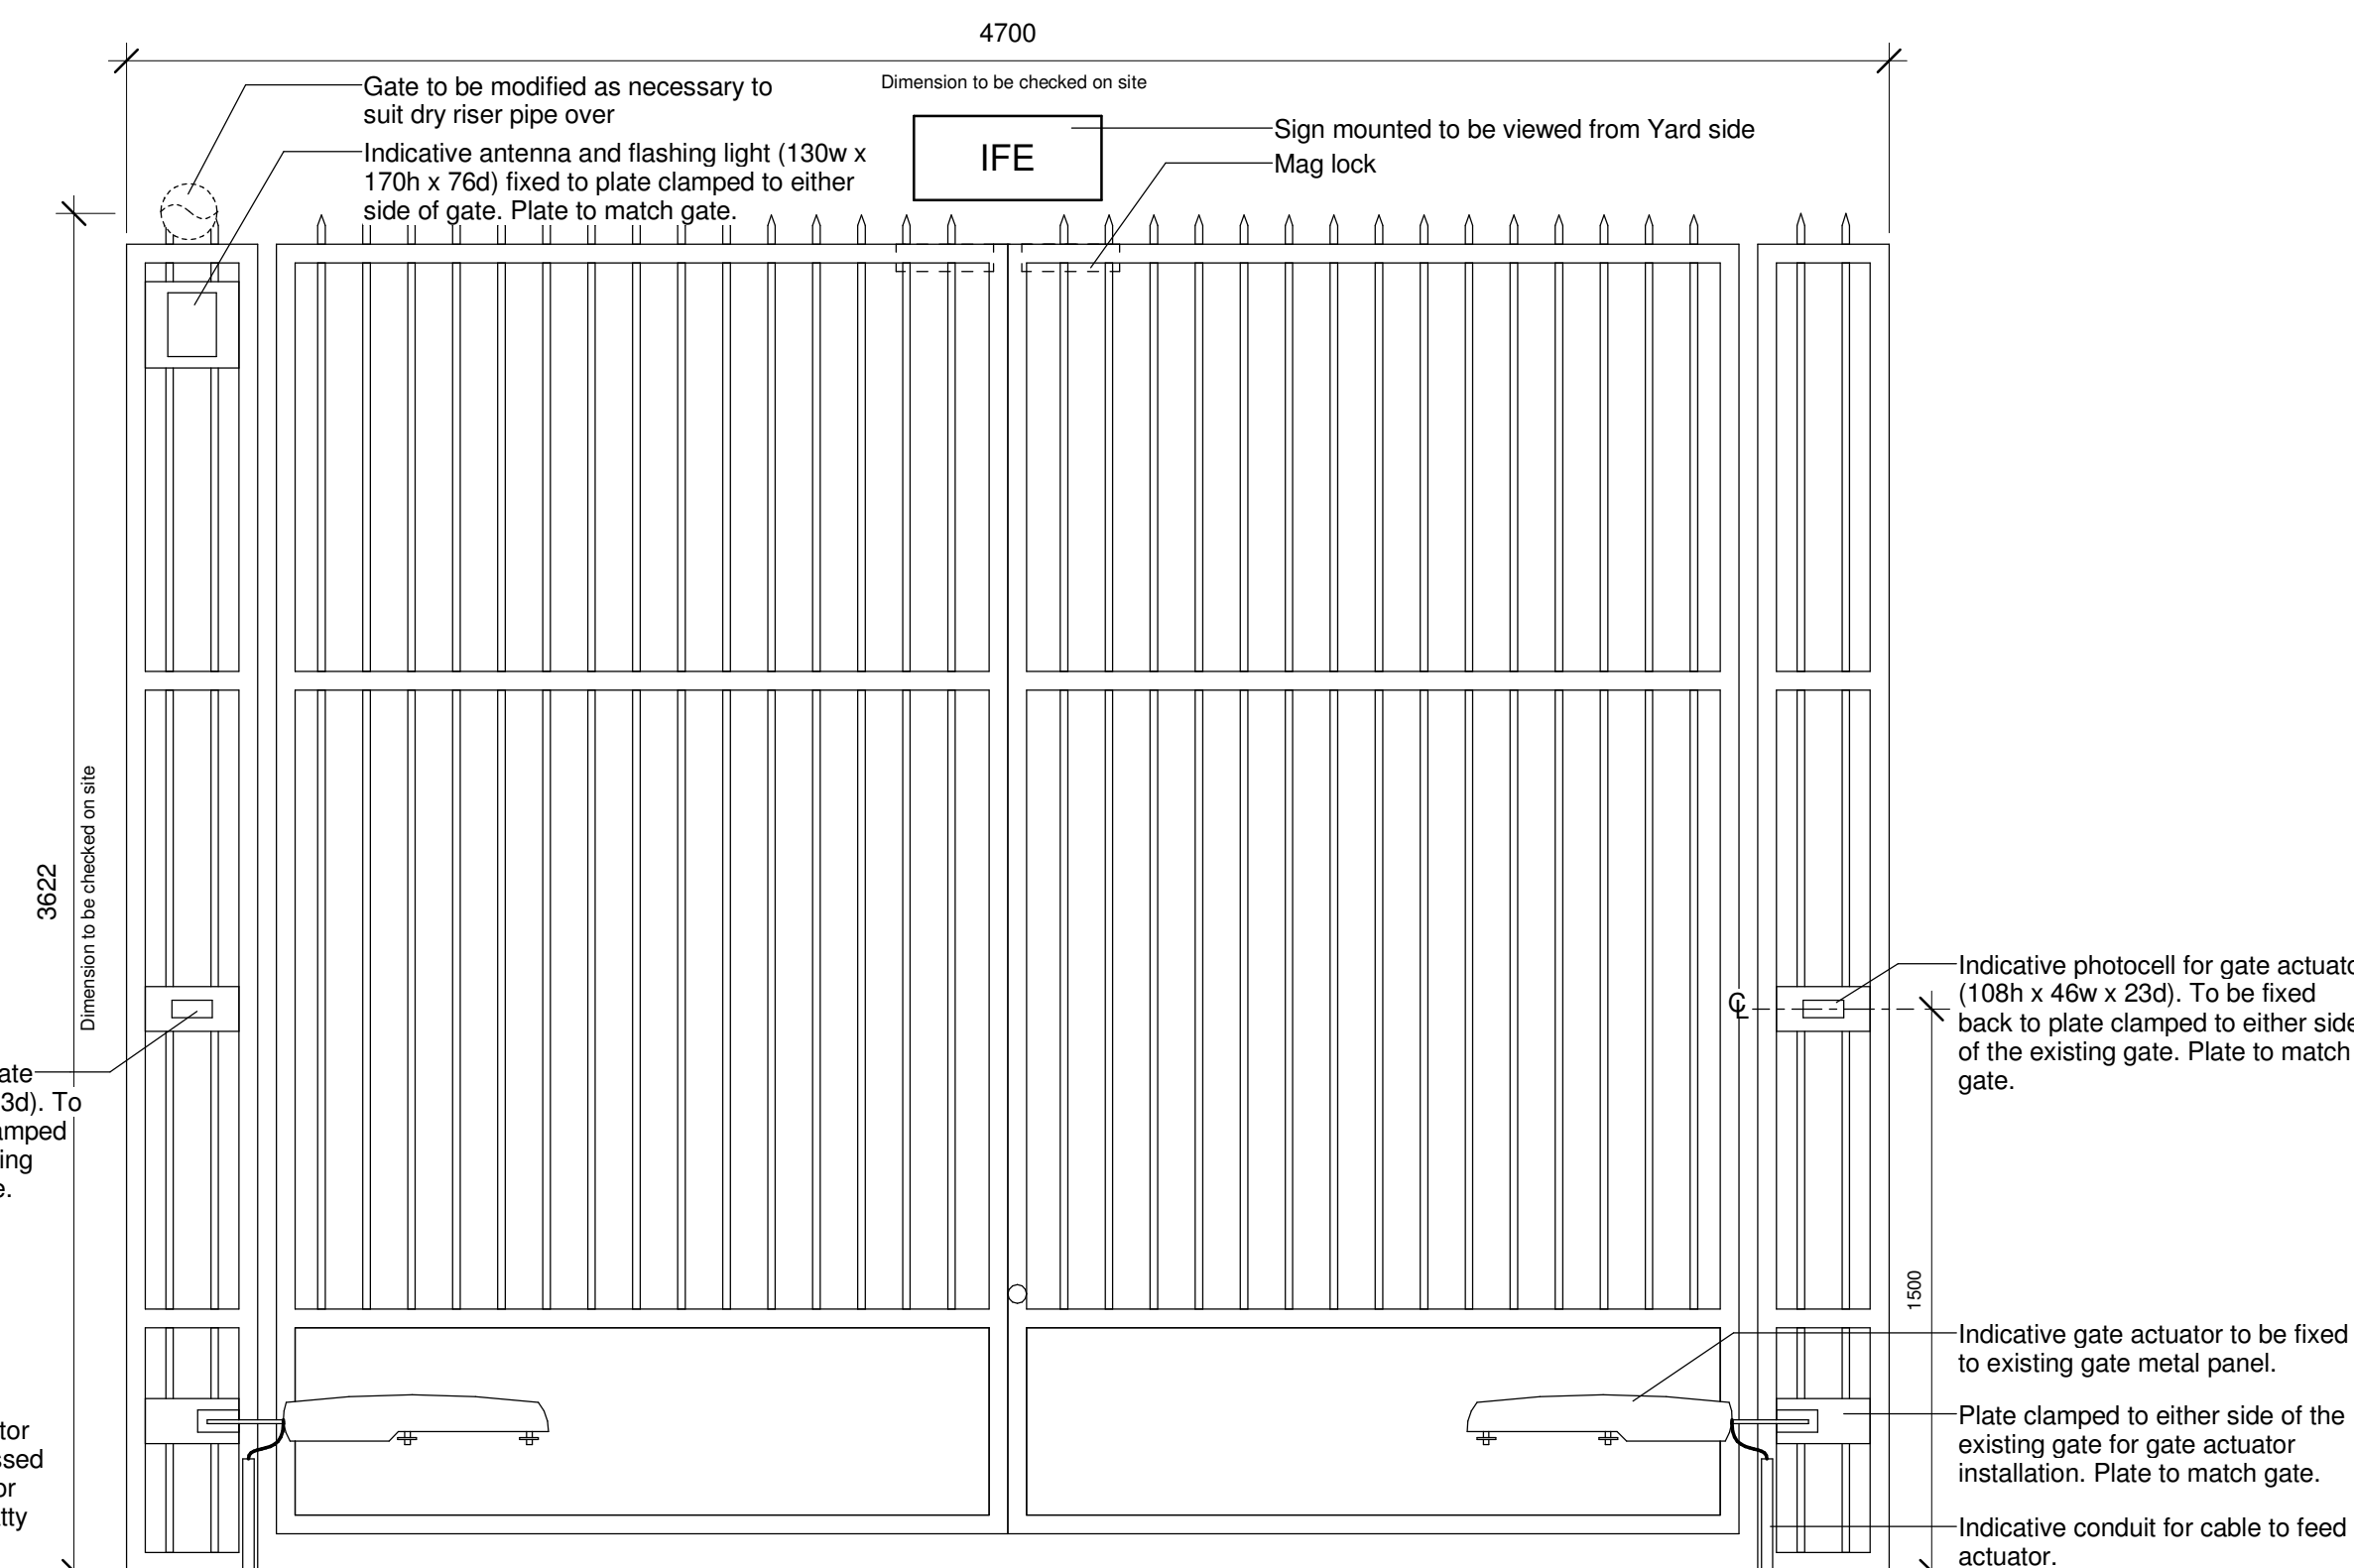

- Setting-out of gate actuator and associated equipment to follow principals shown above. Any equipment not shown above (or on drawing S\_411) to be highlighted to architect prior to installation.

Final detail of gate actuator installation by specialist.

**Wilkins Terrace**  
Balfour Beatty

| <b>standard notes</b><br><br>1. Do not scale this drawing.<br>2. All dimensions must be checked on site and any discrepancies verified with the architect.<br>3. Unless shown otherwise, all dimensions are to structural surfaces. | <b>drawing notes</b><br><br>ALL HEIGHTS ARE SHOWN ABOVE FINISH FLOOR LEVEL.<br>Contractor to submit proposals for approval by Project Manager and Employer's Consultant team (with signage incorporated)<br>Contractor to provide samples for approval prior to order.<br><br>IRONMONGERY TO 3V SPECIFICATION. ALL IRONMONGERY SHOW IS FOR DESIGN INTENT ONLY. SETTING OUT OF FIXTURES AND VISION PANELS TO CONFORM TO MANUFACTURERS RECOMMENDATIONS AND BRITISH STANDARDS GUIDELINES | <p>- For Ironmongery, Acces Control Equipment and Fire Signage refer to Door and Ironmongery Schedules and Security and Fire Strategies.<br/>- For all fire ratings see drawings PK6_130, PK6_131, PK6_132 and PK6_133</p> <p>All dimensions for doors in existing structural openings to be checked on site. (Door Types D, E, K &amp; L)</p> | <p>Electronic Control Legend as per Reach Active information:<br/>:R12 - Card Reader<br/>:BG - Break Glass Call Point<br/>:EB - Exit Button<br/>:DB - Disabled Button<br/>:PB - Panic Alarm Button<br/>:CE - Control Equipment<br/>:RAT - Remote Arming Terminal</p> <p>For setting out height of hardware refer to drawing A_1250</p> | revisions   | rev   | date   | by | amendment | P1 | 17.06.15 | CB | PK9 Issue | P2 | 25.06.15 | FH | PK11 Issue | C1 | 19.10.15 | FH | Construction Issue | C2 | 15.04.16 | LM | Door Package Issue | C3 | 06.05.16 | CB | Maglocks and anotations updated | C4 | 21.06.16 | CB | Door package revisions | C5 | 13.07.16 | FH | Revised following client comments | C6 | 18.10.16 | FH | Revised following client comments | C7 | 31.11.16 | FH | Revised to supplier information | C8 | 11.01.17 | FH | Revised to client comments | C9 | 09.03.17 | FH | Revised sign arrangement |
|---|---|--|--|---|---|--|----|-----------|----|----------|----|-----------|----|----------|----|------------|----|----------|----|--------------------|----|----------|----|--------------------|----|----------|----|---------------------------------|----|----------|----|------------------------|----|----------|----|-----------------------------------|----|----------|----|-----------------------------------|----|----------|----|---------------------------------|----|----------|----|----------------------------|----|----------|----|--------------------------|
| revisions   | rev   | date   | by   | amendment   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| P1  | 17.06.15  | CB   | PK9 Issue  |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| P2  | 25.06.15  | FH   | PK11 Issue   |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C1  | 19.10.15  | FH   | Construction Issue   |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C2  | 15.04.16  | LM   | Door Package Issue   |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C3  | 06.05.16  | CB   | Maglocks and anotations updated  |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C4  | 21.06.16  | CB   | Door package revisions   |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C5  | 13.07.16  | FH   | Revised following client comments  |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C6  | 18.10.16  | FH   | Revised following client comments  |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C7  | 31.11.16  | FH   | Revised to supplier information  |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C8  | 11.01.17  | FH   | Revised to client comments   |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
| C9  | 09.03.17  | FH   | Revised sign arrangement   |   |   |  |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |
|   |   |  |  | <b>date</b><br>03/12/14<br><br><b>scale</b><br>As indicated<br><br><b>drawn</b><br>FH<br><br><b>checked</b><br>PM<br><br><b>drawing number</b><br>3247- S - 411<br><br><b>rev</b><br>C9 | <b>client</b><br>Balfour Beatty<br><br><b>door</b><br>Drawing and Window Schedule 2<br><br>C:\Revit Local\3247_BB_Wilkins Terrace_CENTRAL_freya.heath.rvt | <b>Levitt Bernstein</b><br>1 Kingsland Passage<br>London<br>E8 2BB<br><br>t: 020 7275 7676<br>f: 020 7275 9348<br>w: levittbernstein.co.uk<br>e: post@levittbernstein.co.uk<br><br><b>Levitt Bernstein</b> |    |           |    |          |    |           |    |          |    |            |    |          |    |                    |    |          |    |                    |    |          |    |                                 |    |          |    |                        |    |          |    |                                   |    |          |    |                                   |    |          |    |                                 |    |          |    |                            |    |          |    |                          |