


Pile Schedule								
Pile Ref:	Pile Size	Cut-off	Vertical Permanent Actions Gk (kN)	Vertical Water Uplift Action Gk (kN)	Vertical Imposed Action Qk (kN)	Vertical Wind Action Qk (kN)	Horizontal Soil Action Qk (kN)	Horizontal Wind Action Qk (kN)
P1	450	75	100	-50	25	-25	50	25
P2	450	75	100	-50	25	-25	50	25
P3	450	75	100	-50	25	-25	50	25
P4	450	75	100	-50	25	-25	50	25
P5	450	75	175	-175	50	-25	50	25
P6	450	75	200	-175	50	-25	50	25
P7	450	75	175	-100	50	-25	50	25
P8	450	75	200	-100	50	-25	50	25
P9	450	75	225	-100	50	-25	50	25
P10	450	75	225	-100	50	-25	50	25
P11	450	75	225	-100	50	-25	50	25
P12	450	75	250	-100	50	-25	50	25
P13	450	75	250	-125	50	-25	50	25
P14	450	75	275	-125	50	-25	50	25
P15	450	75	275	-125	50	-25	50	25
P16	450	75	250	-100	75	-25	50	25
P17	450	75	150	-50	50	-25	50	25
P18	450	75	150	-50	50	-25	50	25
P19	450	75	150	-75	50	-25	50	25
P20	450	75	150	-75	50	-25	50	25
P21	450	75	150	-25	75	-25	50	25
P22	450	75	150	-25	75	-25	50	25
P23	450	75	150	-25	75	-25	50	25
P24	450	75	150	-50	75	-25	50	25
P25	450	75	150	-25	75	-25	50	25
P26	450	75	150	-25	75	-25	50	25
P27	450	75	175	-25	75	-25	50	25
P28	450	75	120	-25	50	-25	50	25
P29	450	75	120	-25	50	-25	50	25
P30	450	75	225	-50	75	-25	50	25
P31	450	75	100	-25	25	-25	50	25
P32	450	75	100	-25	25	-25	50	25
P33	450	75	275	-75	75	-25	50	25
P34	450	75	250	-100	50	-25	50	25
P35	450	75	250	-100	50	-25	50	25
P36	450	75	250	-100	50	-25	50	25
P37	450	75	200	-75	25	-25	50	25
P38	450	75	200	-75	25	-25	50	25
P39	450	75	300	-125	50	-25	50	25
P40	450	75	300	-125	50	-25	50	25
P41	450	75	275	-125	50	-25	50	25
P42	450	75	300	-125	50	-25	50	25
P43	450	75	250	-125	50	-25	50	25
P44	450	75	275	-125	50	-25	50	25
P45	450	75	200	-100	50	-25	50	25
P46	450	75	200	-100	50	-25	50	25
P53	450	75	250	0	0	0	50	25

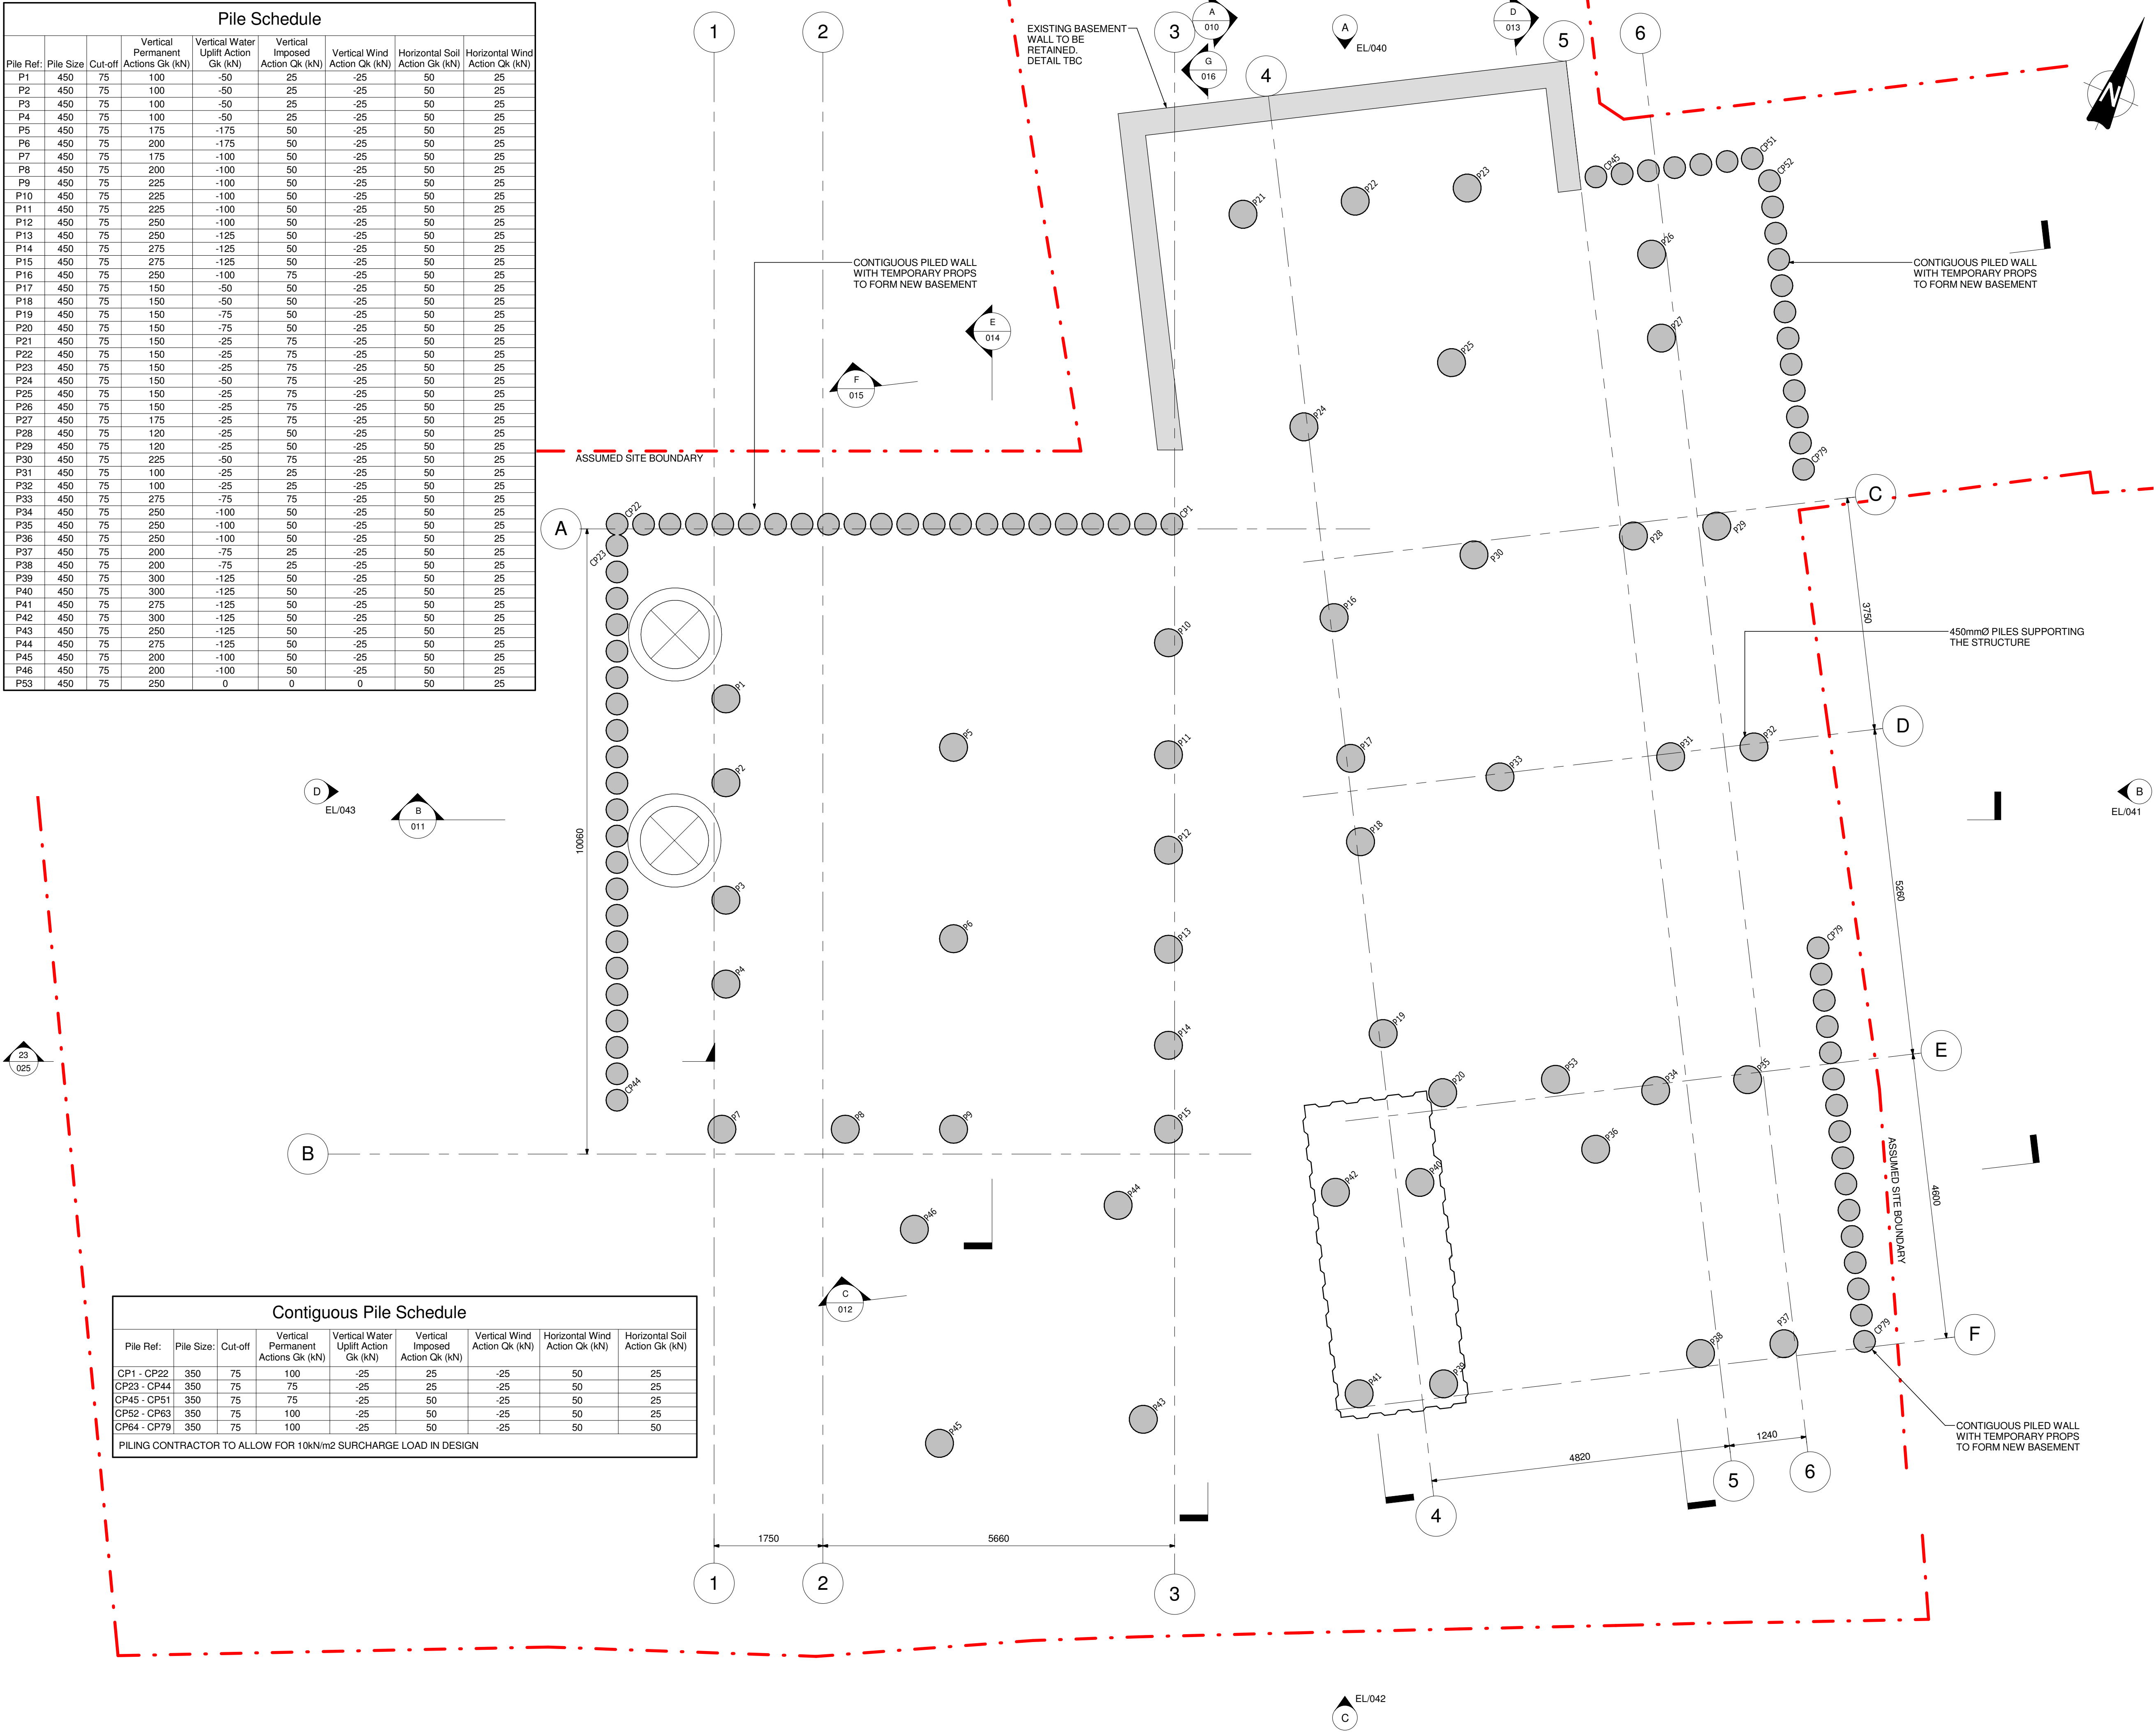

Contiguous Pile Schedule								
Pile Ref:	Pile Size:	Cut-off	Vertical Permanent Actions Gk (kN)	Vertical Water Uplift Action Gk (kN)	Vertical Imposed Action Qk (kN)	Vertical Wind Action Qk (kN)	Horizontal Wind Action Qk (kN)	Horizontal Soil Action Gk (kN)
CP1 - CP22	350	75	100	-25	25	-25	50	25
CP23 - CP44	350	75	75	-25	25	-25	50	25
CP45 - CP51	350	75	75	-25	50	-25	50	25
CP52 - CP63	350	75	100	-25	50	-25	50	25
CP64 - CP79	350	75	100	-25	50	-25	50	50

PIILING CONTRACTOR TO ALLOW FOR 10kN/m2 SURCHARGE LOAD IN DESIGN

NOTES

1. DO NOT SCALE FROM THIS DRAWING

2. THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ARCHITECTS AND OTHER CONSULTANTS INFORMATION

3. INTERNAL BLOCKWORK NON-STRUCTURAL

T5	21/04/17	PARTY WALL ISSUE	EP	BS
T4	29/03/17	PARTY WALL ISSUE	EP	BS
T3	20/03/2017	TENDER ISSUE	EP	BS
T2	20/01/2017	TENDER ISSUE	EP	BS
T1	07/11/2016	TENDER ISSUE	TB	BS
P3	07/10/2016	PRELIMINARY ISSUE	TB	BS
P2	31/08/2016	PRELIMINARY ISSUE	TB	BS
P1	03/08/2016	PRELIMINARY ISSUE	TB	BS
Rev	Date	Amendments	By	Chk'd

engineersHRW

London 0207 407 9575 Oxford 01865 251 206 www.ehrw.co.uk

Project:

17 Branch Hill

Drawing title:

Pile Layout

Scale at A1:	Drawn by:	Date:	Chk'd by:
1 : 50	TB	07/08/16	BS

TENDER			
Project Number:	Drawing Type:	Drawing No:	Revision:
1281	GA	001	T5