

Root Excavation Report

28 Redington Road,

London

NW37RB

Undertaken by

James Abbott

Arboraeration

10th to 11th July 2017

Introduction

Site Address: 28 Redington Road, London, NW37RB

Further trial pits were excavated on the property within the RPAs of two Beech trees to establish the extent of rooting in relation to construction works. Plots were excavated using an air spade and manual digging tools.

Reason for trial pits

All plots were excavated to find evidence of root growth from T11 and T12 within the property ahead of proposed building works.

Trial Pit Results – numbered and located as per plans supplied

Trial Pit 10	2.0m long, 0.3m wide, 0.6m deep 1x 49mm root, 1x 35mm roots 1x 30mm root
Trial Pit 11	2.0m long, 0.3m wide, 0.75 deep 1x 35mm root 1x 25mm root small mass of 10-15mm roots
Trial Pit 12	2.0m long, 0.3m wide, 0.75 deep no significant roots,


Further Information

TP10 was backfilled after the discovery of the 49mm root. TP11 was added 1m further from the Trees after tracing out the root.

TP12 was added another 0.5m in from TP11 after consultation with Adam Hollis (Landmark trees)

4 Cover boards were left on site.

Site overview

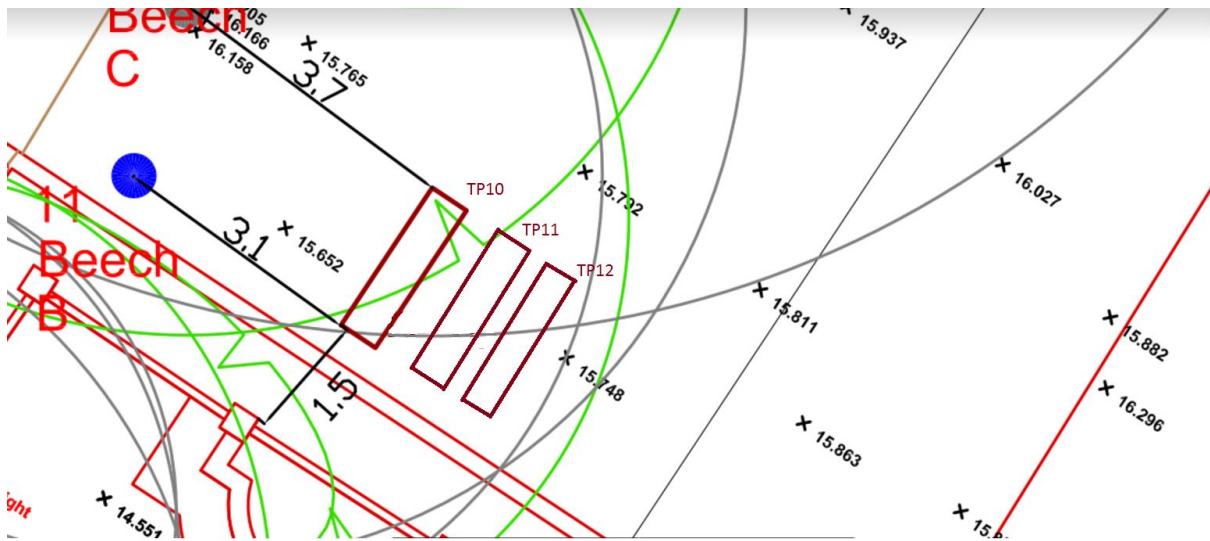

Not to scale

Trial Pit 10





Trial Pit 11



ArborAeration is a trading name of Sparrowhatch Forestry Ltd- Co Ref 07757279 – Vat no182 1044 38

Trial Pit 12

