
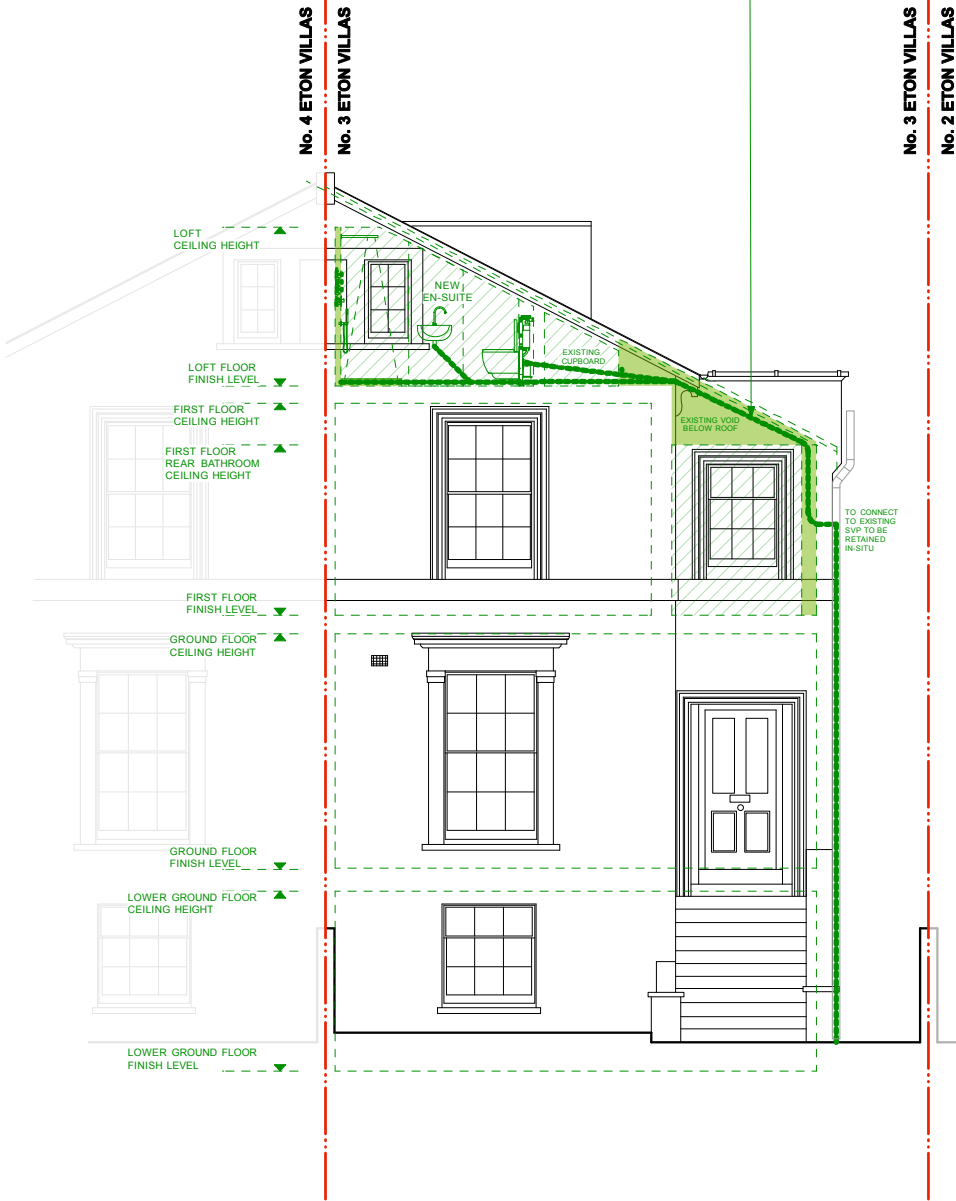


ALL NEW DRAINAGE FROM LOFT-LEVEL EN-SUITES TO CONNECT TO EXISTING SVP AND VERTICAL DRAINAGE PIPES INSIDE THE BUILDING. (NO EXTERNAL ALTERATIONS ARE REQUIRED TO ACHIEVE THIS).

ALL PIPEWORK WILL BE RUN WITHIN TILED / PLASTERBOARDED INTERIOR LINED 'WET-WALLS' AND WITHIN EXISTING ROOF / CEILING VOID

*SITE INVESTIGATIONS AND UNCOVERING WORKS HAVE CONFIRMED THAT NO EXISTING JOISTS OR RAFTERS ARE REQUIRED TO BE ALTERED TO ACHIEVE THIS

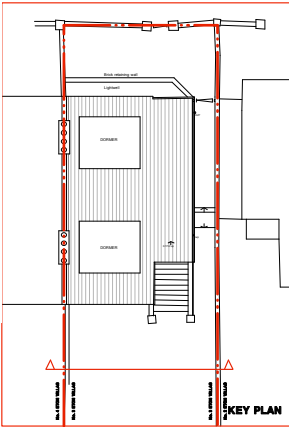

FRONT ELEVATION PROPOSED



(DETAILS OF DRAINAGE SHOWN AS SUPERIMPOSED SECTION INFORMATION)

NO ALTERATIONS TO EXTERNAL DRAINAGE RUNS OR PIPEWORK ARE REQUIRED

ALL NEW DRAINAGE FROM LOFT-LEVEL EN-SUITES TO CONNECT TO EXISTING SVP AND VERTICAL DRAINAGE PIPES INSIDE THE BUILDING. (NO EXTERNAL ALTERATIONS ARE REQUIRED TO ACHIEVE THIS).

ALL PIPEWORK WILL BE RUN WITHIN TILED / PLASTERBOARDED INTERIOR LINED 'WET-WALLS' AND WITHIN EXISTING ROOF / CEILING VOID

*SITE INVESTIGATIONS AND UNCOVERING WORKS HAVE CONFIRMED THAT NO EXISTING JOISTS OR RAFTERS ARE REQUIRED TO BE ALTERED TO ACHIEVE THIS

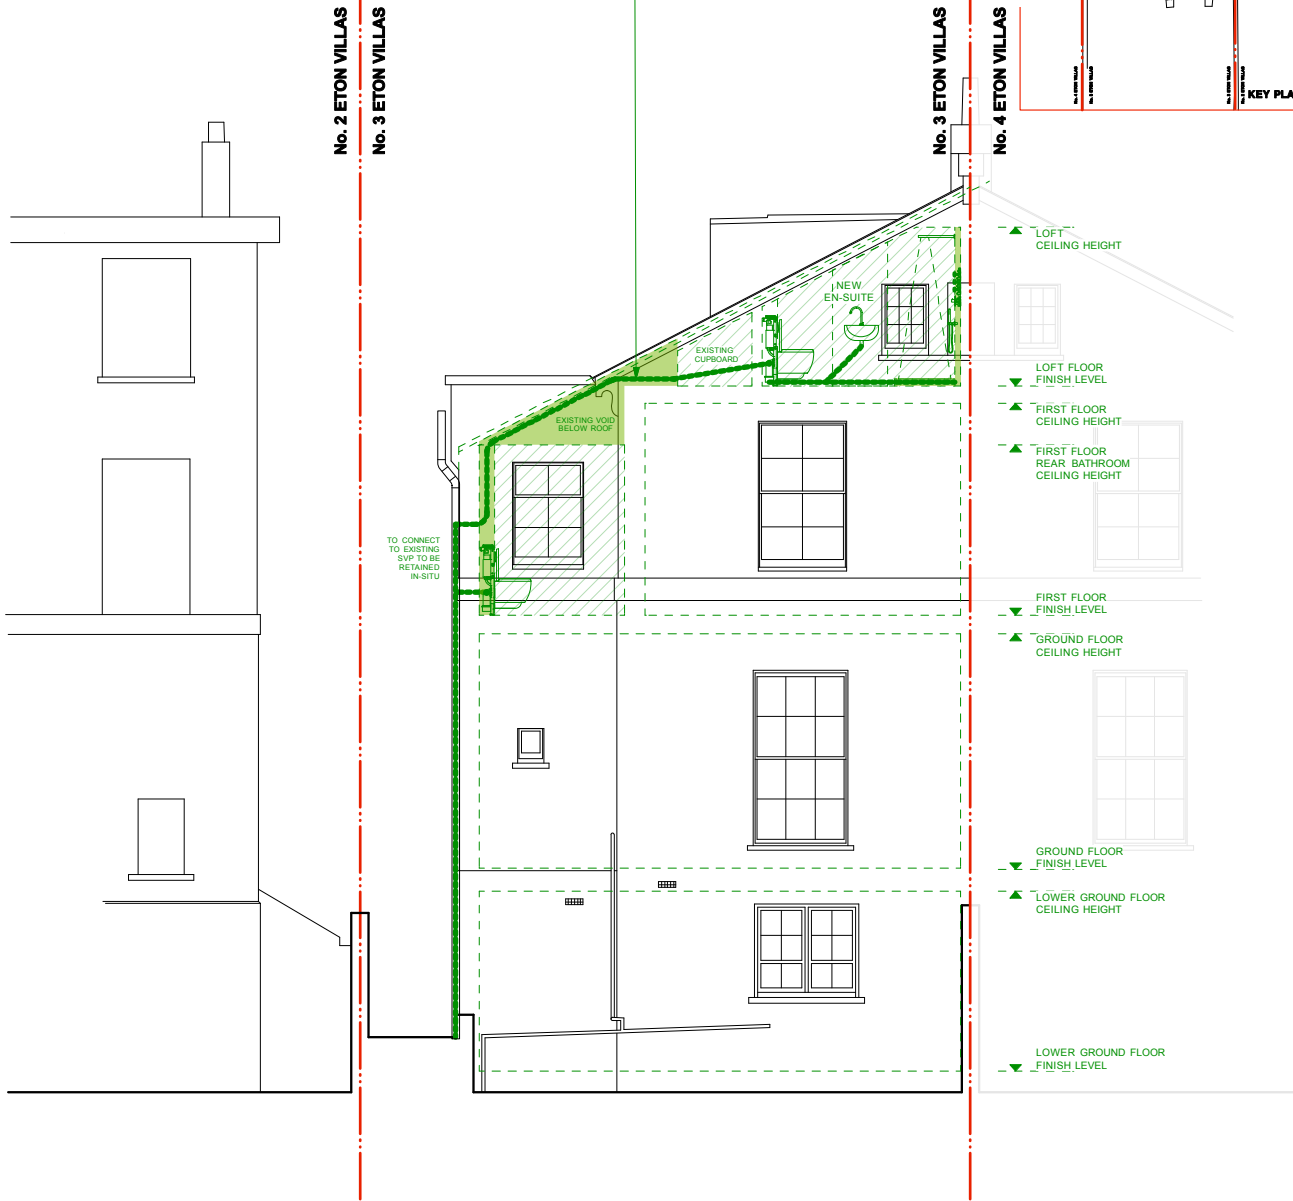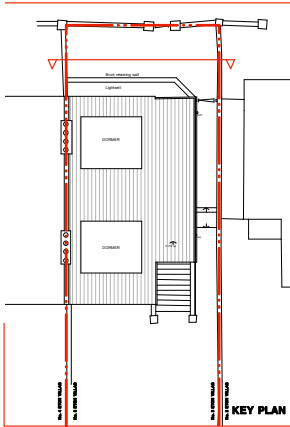


REAR ELEVATION PROPOSED

(DETAILS OF DRAINAGE SHOWN AS SUPERIMPOSED SECTION INFORMATION)

NO ALTERATIONS TO EXTERNAL DRAINAGE RUNS OR PIPEWORK ARE REQUIRED

KEY	
	= SERVICE VOID
	= INTERNAL SPACE SHOWN SUPERIMPOSED OVER ELEVATION (EXTERIOR TO REMAIN UNALTERED BY ANY OF THE WORKS)
	= ROUTE OF NEW PIPEWORK (AVOIDING EXISTING JOISTS AND RAFTERS)

INTERNAL ALTERATIONS - LISTED BUILDING CONSENT



Rev. Comments Date

Project **NO. 3 ETON VILLAS • LONDON • NW3 4SX**
Drawing Title **PROPOSED FRONT & REAR ELEVATIONS (SHOWING NEW DRAINAGE)**
Dwg No. **406/207**
Scale **1:100 @ A3** Date **FEB 2018** Drawn by **TW**

ATELIERwest
ARCHITECTURE / DESIGN / PROJECT MANAGEMENT
SUITE 5 / 26 CADOGAN SQUARE / LONDON / SW1X 0JP
INFO@ATELIERWEST.CO.UK / WWW.ATELIERWEST.CO.UK
0203 587 7227
07801 650 531