

GENERAL NOTES

BASIS OF DESIGN
 This drawing has been prepared from information supplied to us by, or on behalf of the contractor, who should check that his requirements have been correctly interpreted and that all loadings, dimensions, lift heights, bay sizes, erection/striking sequences etc. are as required and practicable.

IMPOSED LOADS
 The contractor is to ensure that the existing structure, its fabric and/or the ground will safely support the extra imposed loads; or supply new.
 Maximum calculated tie load: See notes
 Maximum calculated leg load: See notes

LOADINGS ALLOWED
 The contractor must ensure that all loading(s) allowed for is sufficient.
 Live loads: See notes

Windloading: As BSEN1991-1-4
 Maximum number of boarded levels:

SHORING WORK
 We can not and will not pass comment on the structure being shored, as this involves matters beyond our control and knowledge. It is the contractors responsibility to ensure that the existing structure will safely span between our supports, and can be safely shored in the way indicated.

FOUNDATIONS
 The contractor must prepare all foundations prior to erection.

TEMPORARY ROOFS
 No temporary roof can be made watertight.
 Loading: Snow loading assessed using BSEN1991-1-3:2003, unless the contractor adopts a snow management system.

MATERIALS
 All scaffolding materials forming this structure are to comply, and be constructed in accordance with BS1139 and TG20:13 (current editions).

MODIFICATION
 No alteration is to be made to the structure detailed on this drawing without prior written permission from PSD (south-east) Limited.

PROPERTY
 This drawing is confidential and the exclusive property of THE SCAFFOLD CONTRACTOR.
 No unauthorised use, copy or disclosure is to be made, and is to be returned on request.

DIMENSIONS
 Written dimensions shall take precedence over scaled dimensions. The contractor must verify all site dimensions and notify of any discrepancies prior to erection.

PERMITS AND PERMISSIONS
 The contractor must obtain all permits and permissions prior to erection.

CONSTRUCTION NOTES


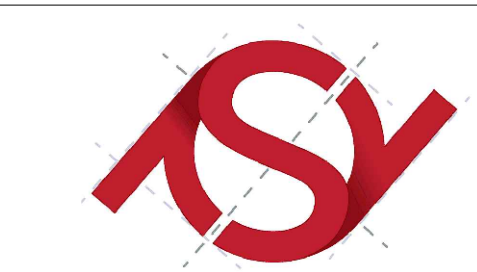
- 1) All ledger beams and/or unit beams are to be tied together at 1200 centres on top chord and 2400 centres on bottom chord, with the top chord plan braced, unless stated otherwise.
- 2) Unless otherwise noted all lifts other than boarded platform levels are to be constructed using load bearing couplers.
- 3) All general construction is to be in accordance with TG20:13 unless noted otherwise.
- 4) Main contractor to undertake all making good where necessary.
- 5) Main contractors to provide and maintain adequate tie positions.
- 6) No sheeting, wind protection or fans to be added to this structure without prior written permission from PSD (south-east) limited.



Revisions:

DATE	REVISION DETAILS
A	
B	
C	
D	
E	
F	

Client:

PSD (south-east) Limited
 Tel: 020 7403 2994
 Office: 9-10 Copper Row, London SE1 2LH

TITLE:
**Proposed Scaffold Layout
 Access & Temporary Roof
 Phase 2 High Holborn, London**

DRAWN: D.Dangerfield	CHECKED BY: P. Pinto
CLIENT: Rodel Scaff.	DATE: 04/12/2017
SCALE: As Drg @ A1L	DRG No: A/RS 6633-3