


- New under floor foul drain connected into existing drainage system -
1. Disc cut drainage lines in existing Terrazzo.
  2. Lay new drainage to existing manhole.
  3. Infill to match existing pattern changes in existing Terrazzo.
  4. Grind all Terrazzo floor surfaces : 36 grit grinding process
  5. Regrout entire Terrazzo floor surface
  6. Grind to remove all excess grout : 60 grit
  7. Final grind floor surface : 80 grit
  8. Lapidolith seal floor surface : 3 coats
- See attached proposal from DMC contracts

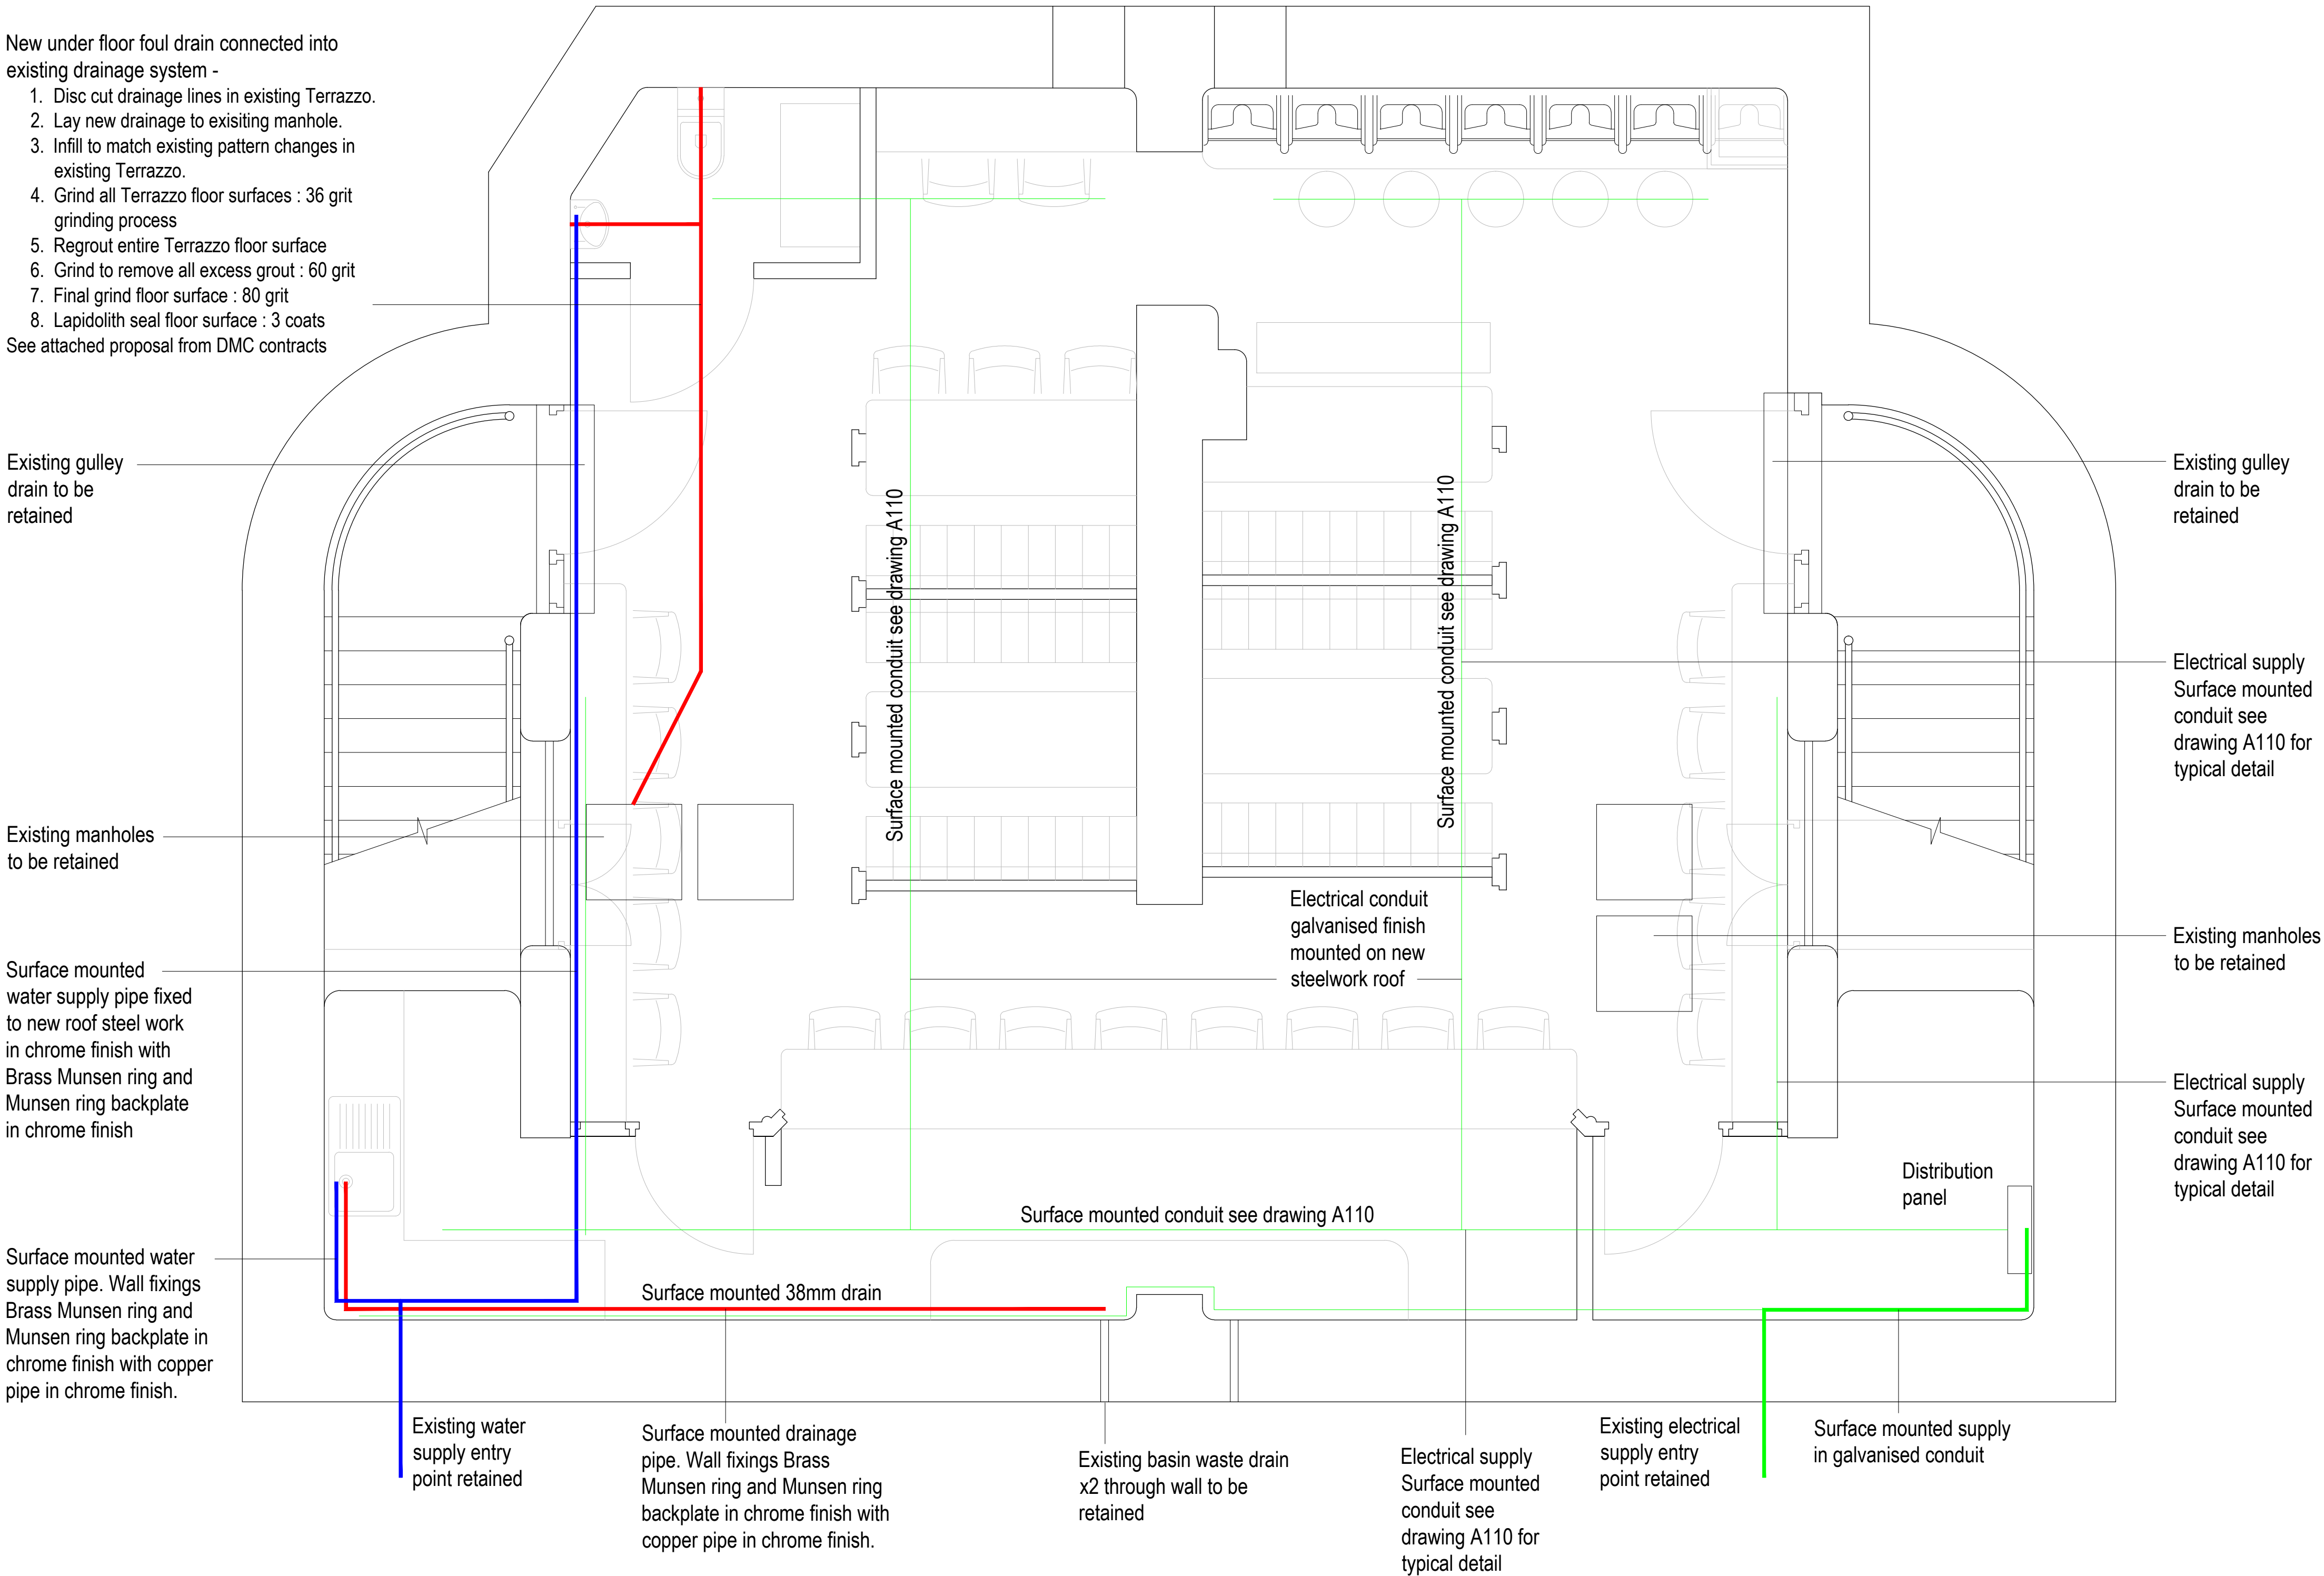

**Proposed conversion of former Public  
Conveniences to Restaurant (A1, A3)**  
Ladies and Gentlemans Public Conveniences,  
Gulford Place, Camden, London, WC1

PRELIMINARY  
NOT FOR  
CONSTRUCTION

Revision no.	
Project No.	737
Cad File	763_V02.05.dwg
Drawn	
Checked	JD
Date	01/25/2017
Scale	As shown
Title/No.	

Services plan