



M ( 1 : 1 )  
Button Station

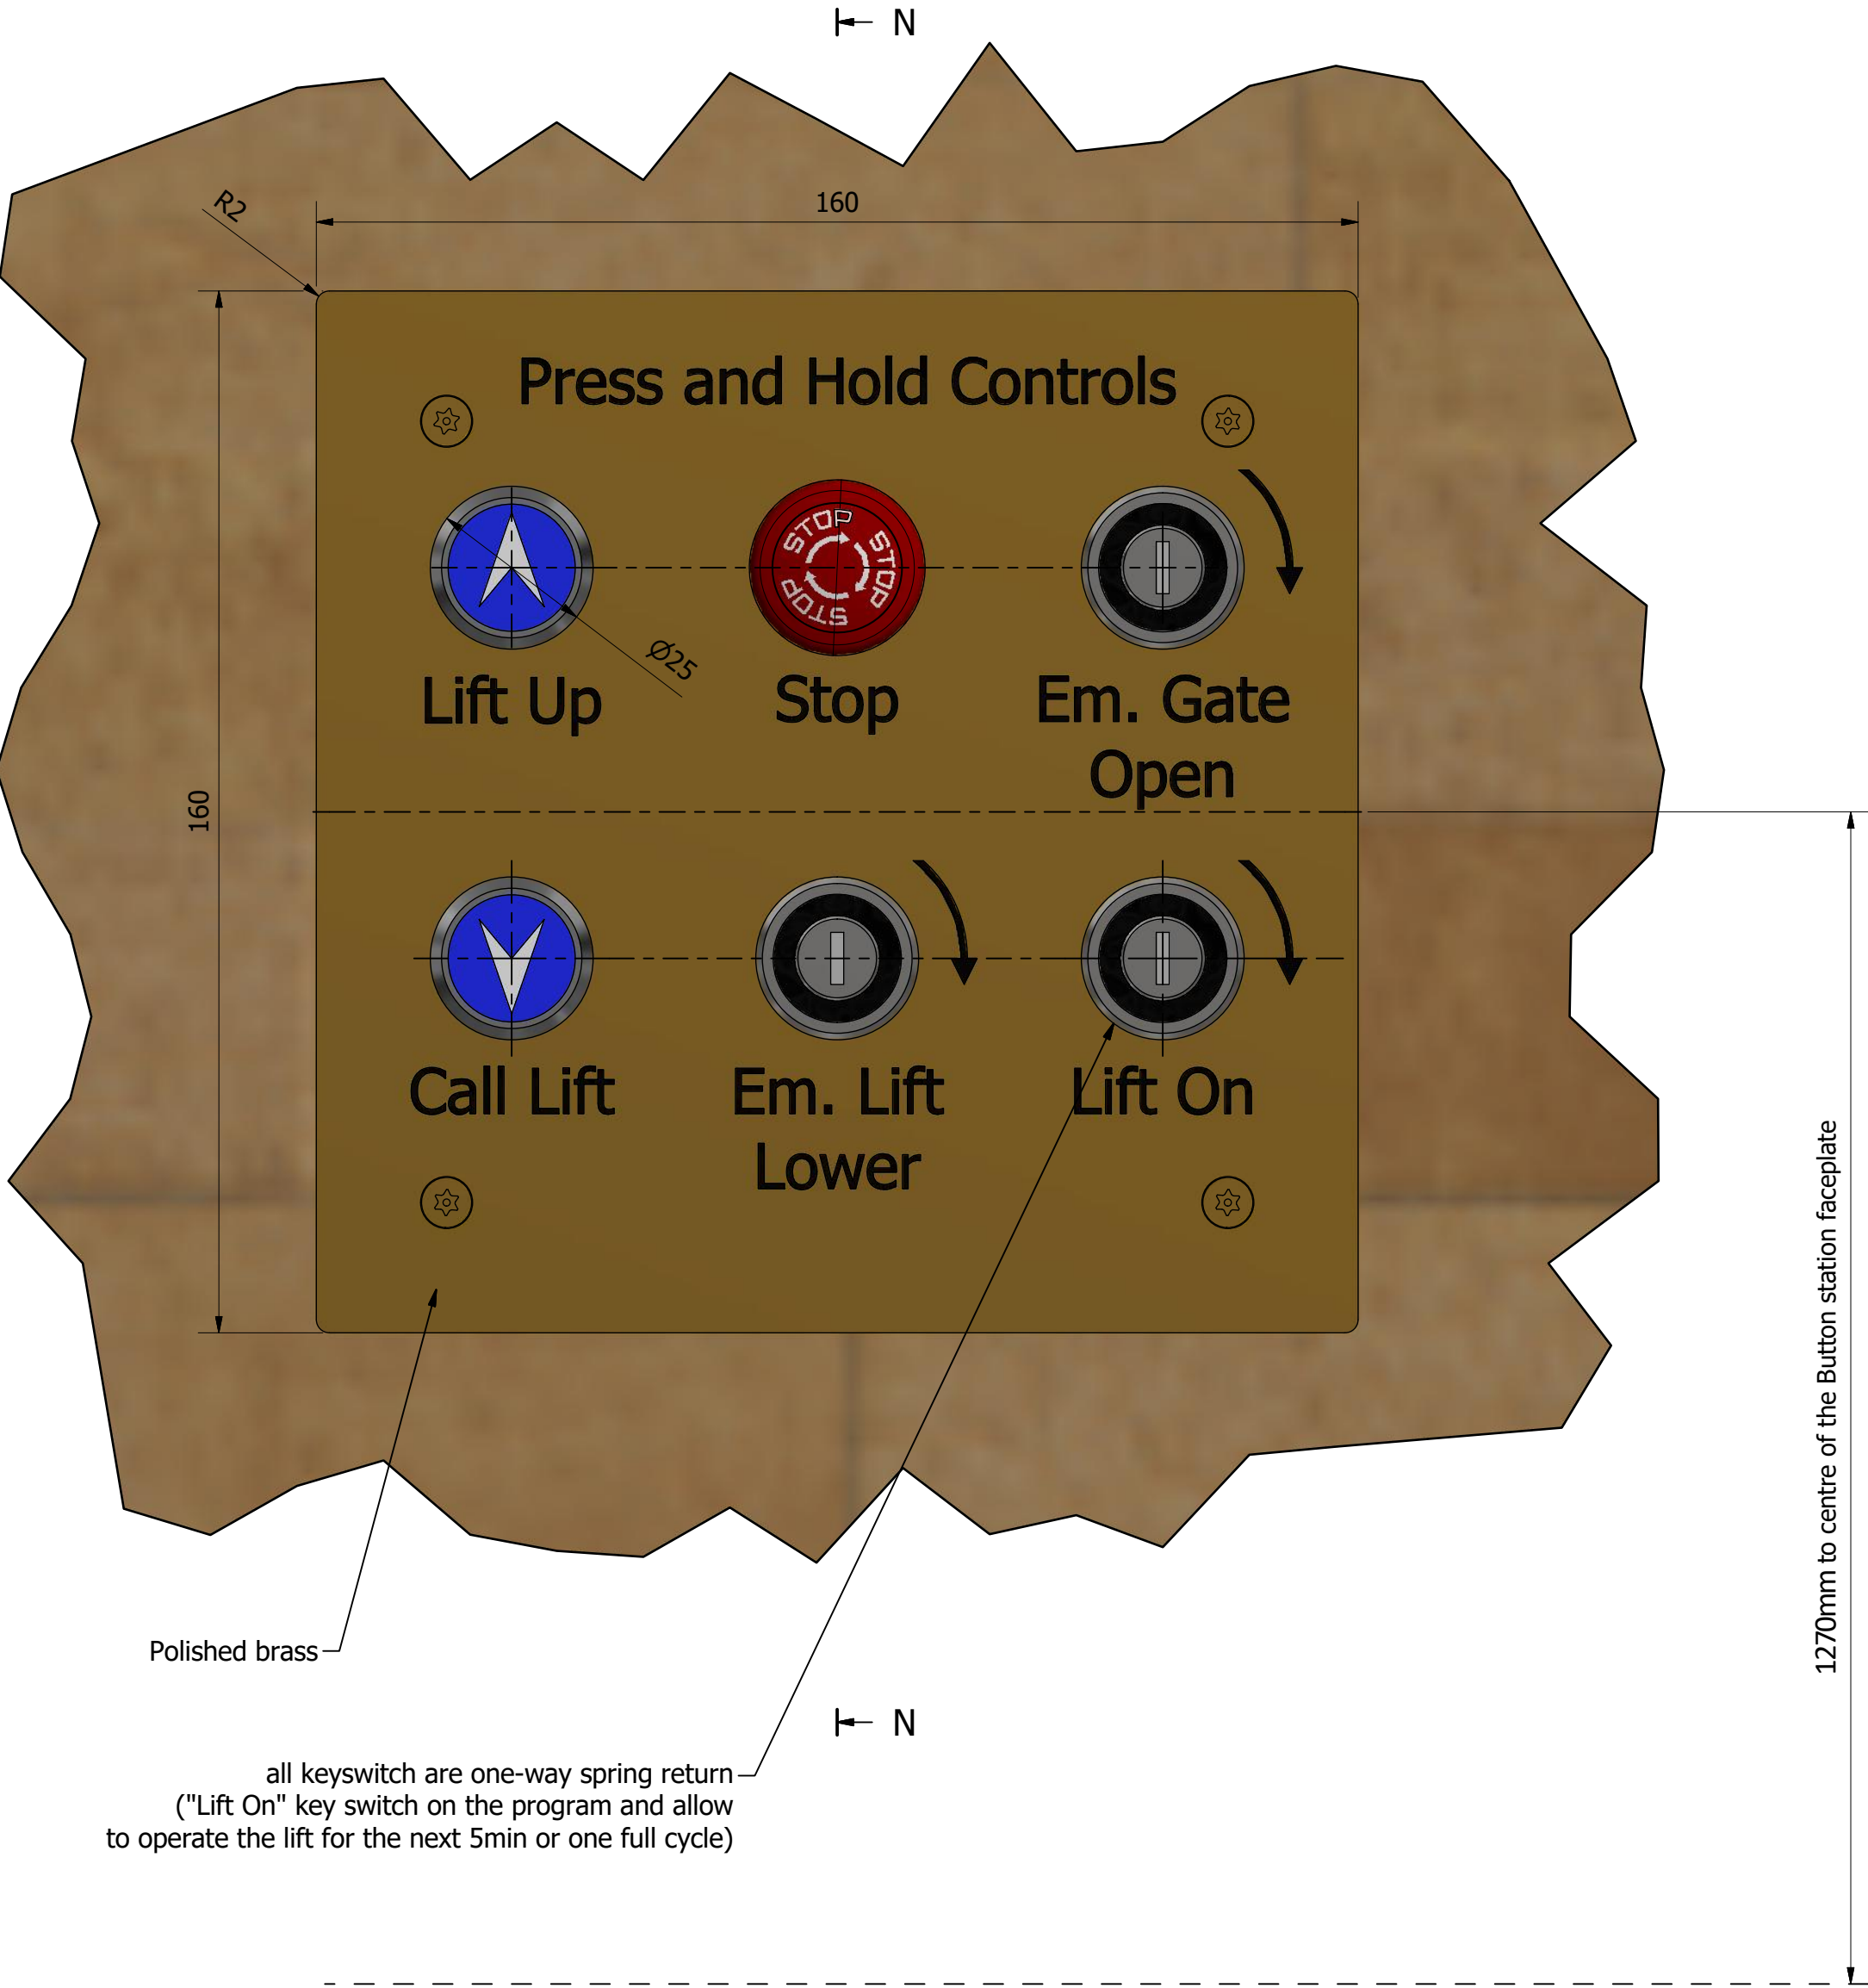


N-N ( 1 : 1 )

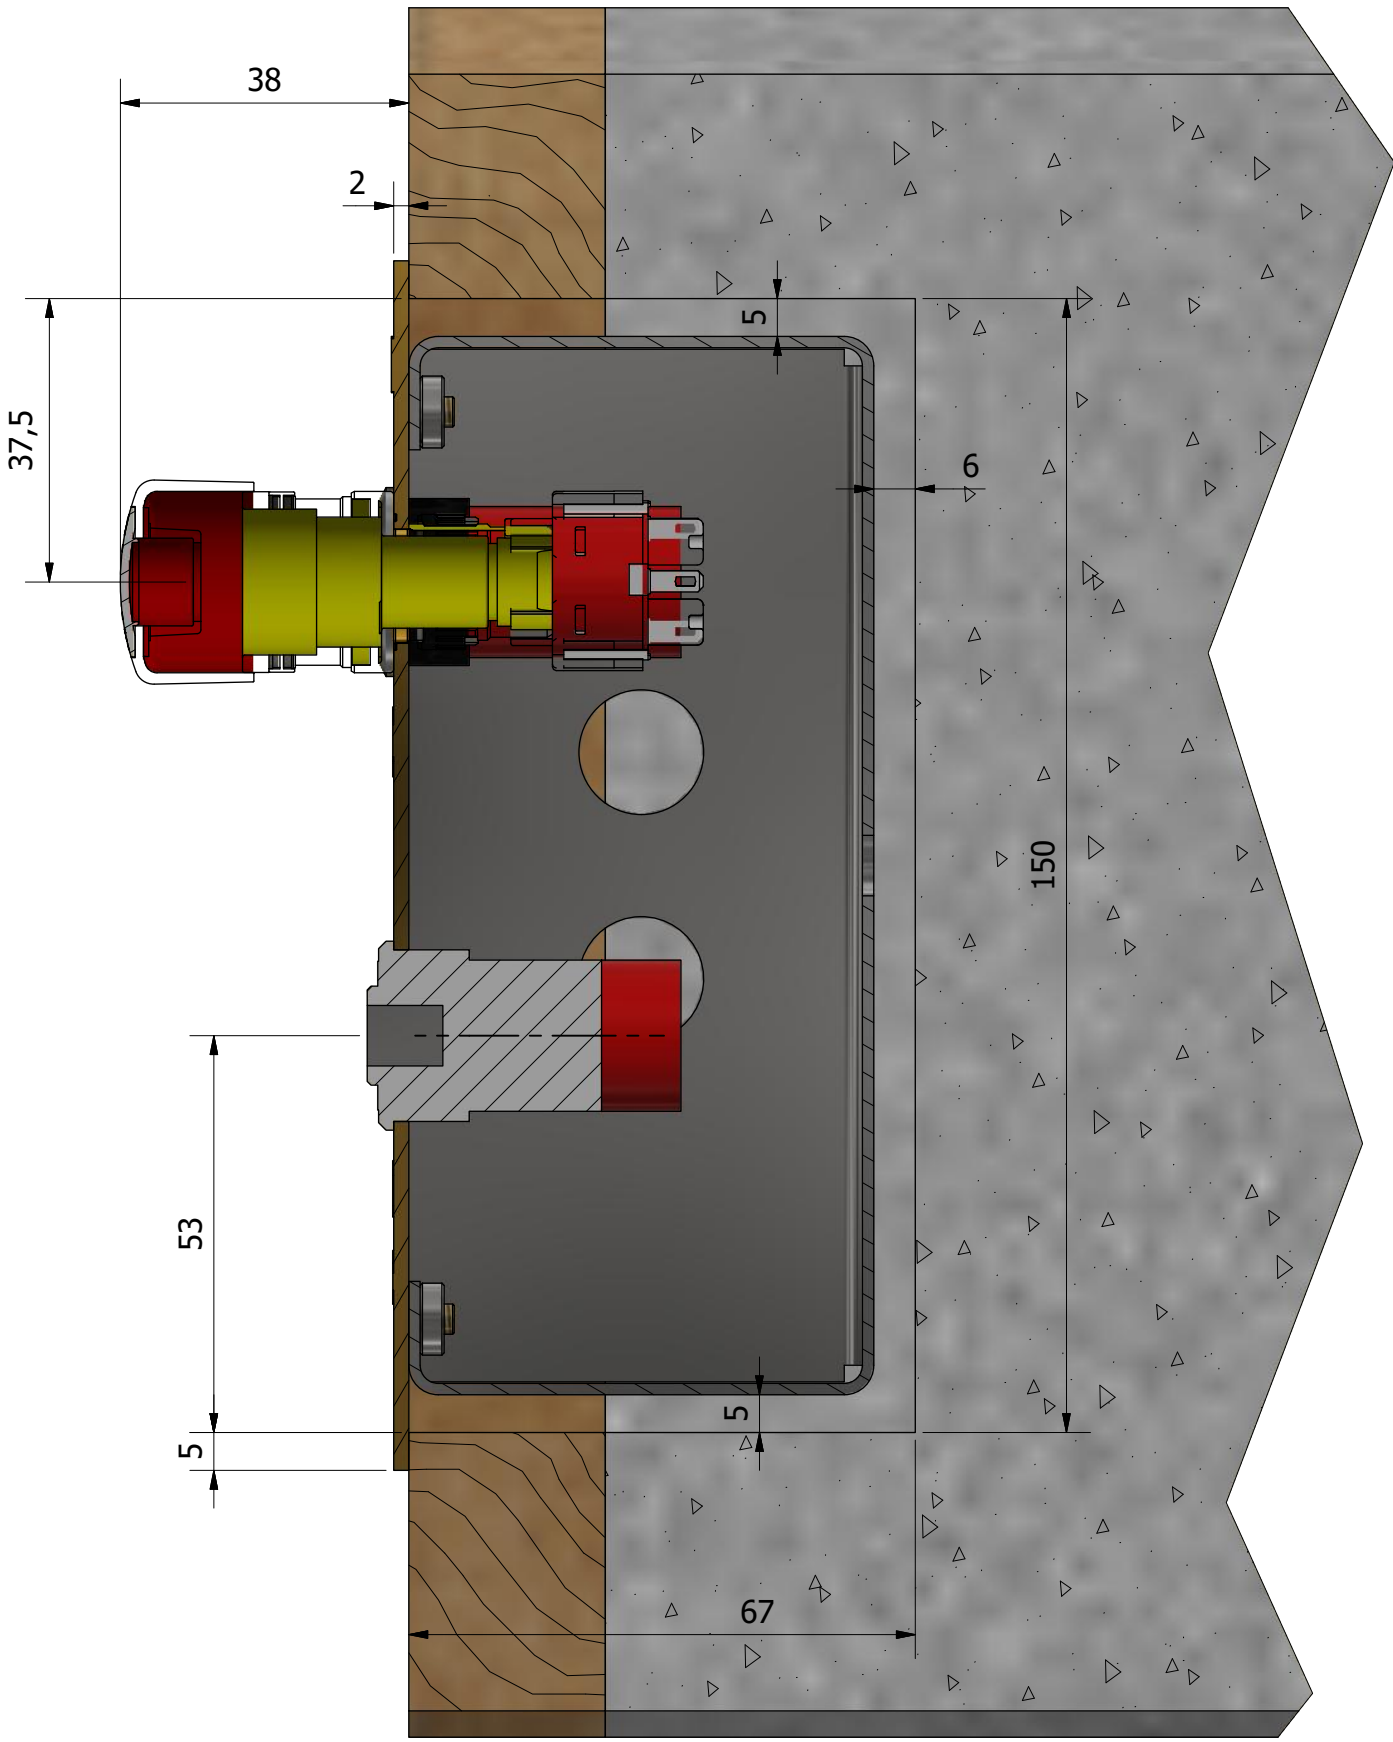

Removable Hand Held Post ( 1 : 2 )

The recess in the wall and the installation of the back box by the Main Contractor prior to the Sesame installation

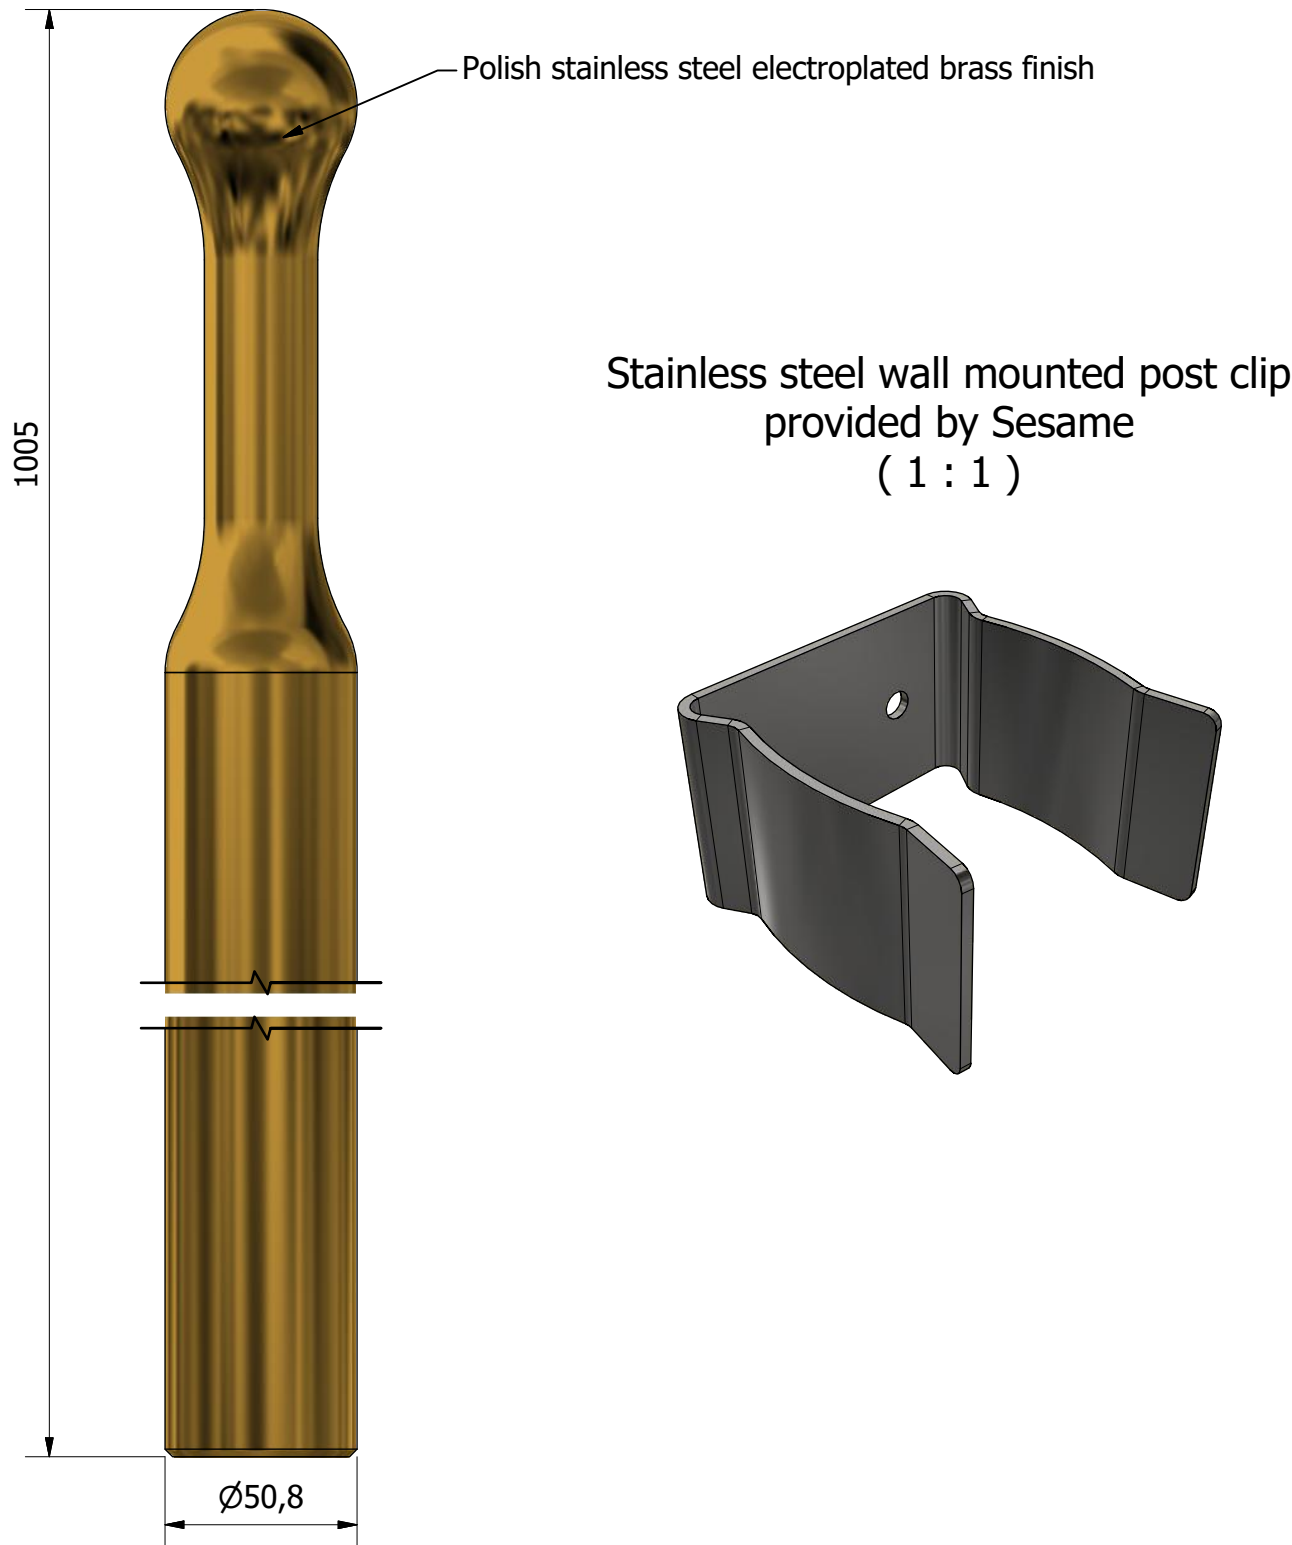

According to the relevant British Standards, the buttons on the button Stations need to be positioned a minimum of 500mm from any moving parts of the Lift. The manufacturing time from drawings approval for these Buttons Stations is 12 weeks.