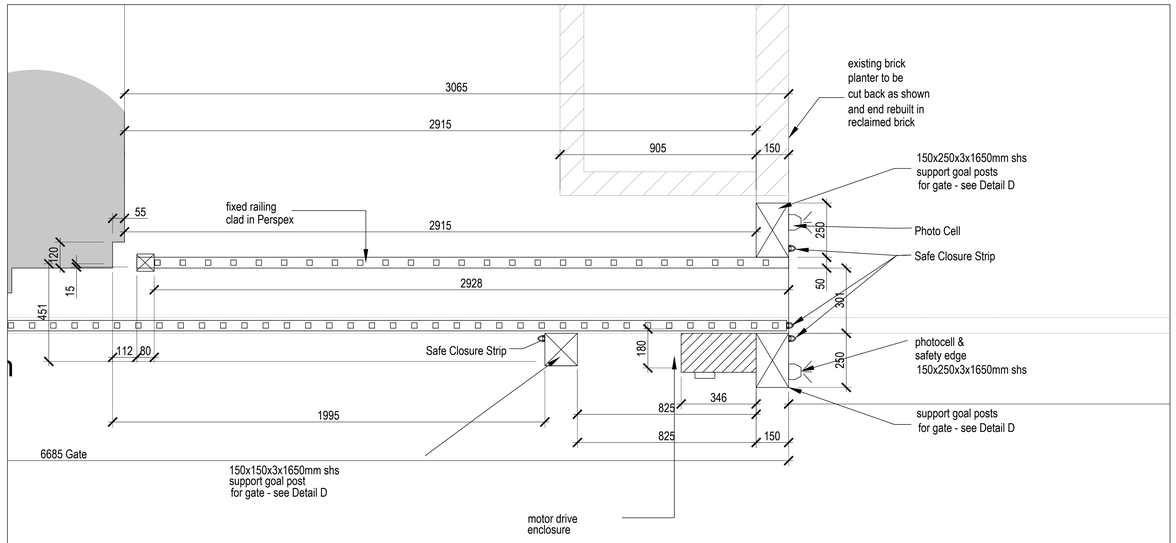

Gate 9 -Partial Plan - See drawing HW-UCS-004 for overall Detail

Detail D

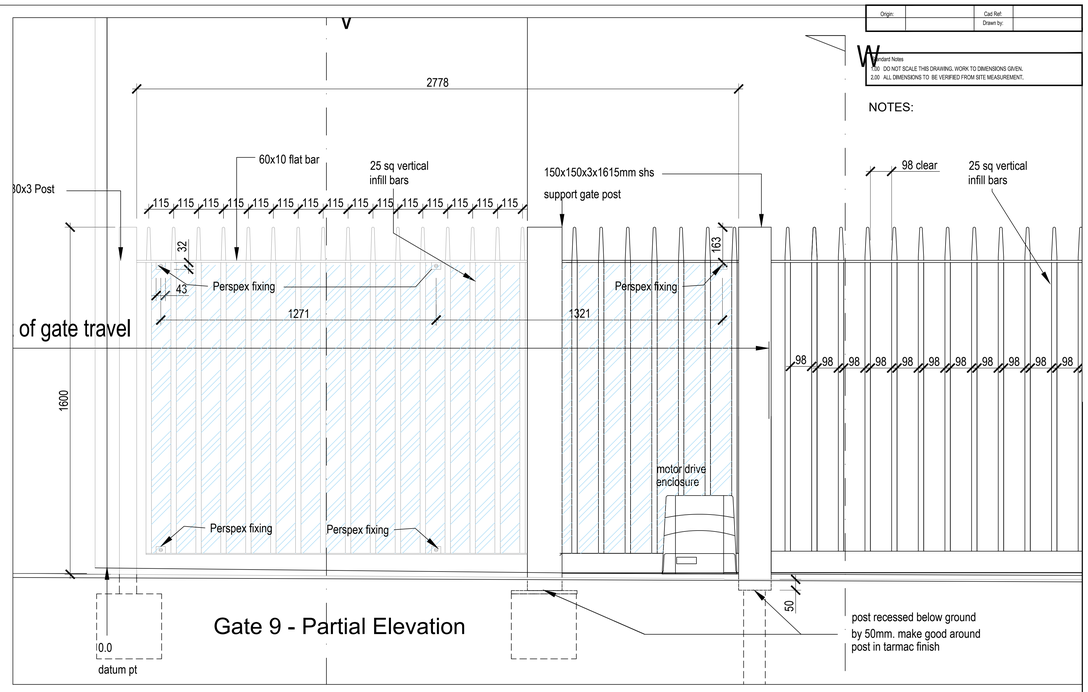

Gate 9 - Partial Elevation

NOTES:

1.00 DO NOT SCALE THIS DRAWING. WORK TO DIMENSIONS GIVEN.
2.00 ALL DIMENSIONS TO BE VERIFIED FROM SITE MEASUREMENT.

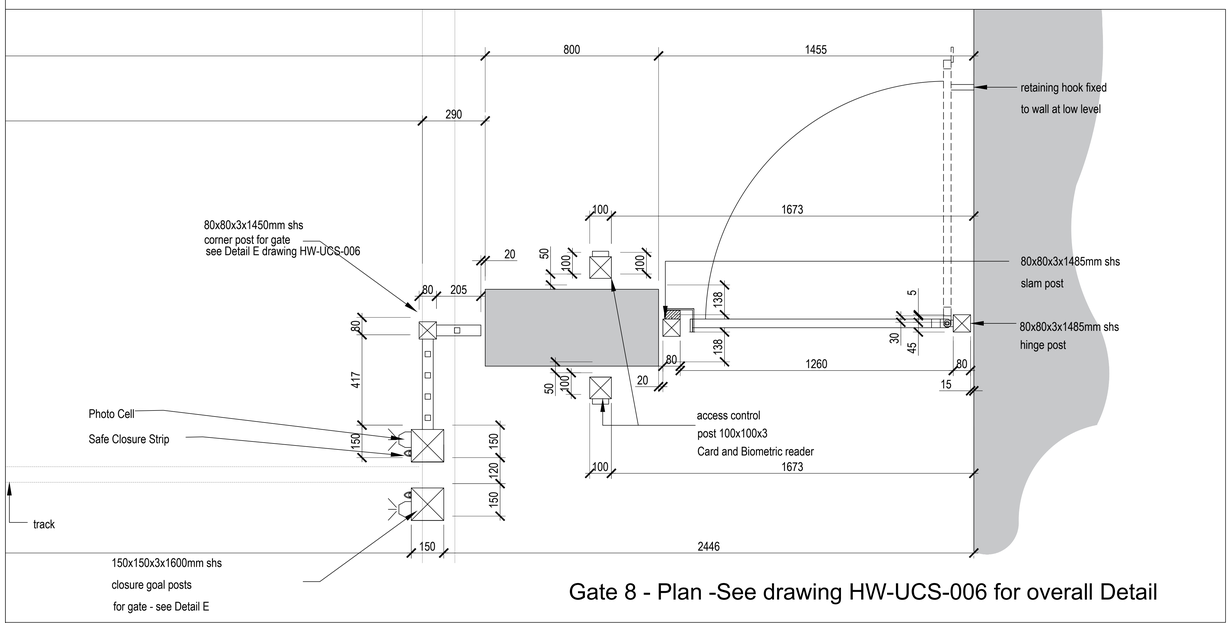

Gate 8 - Plan -See drawing HW-UCS-006 for overall Detail

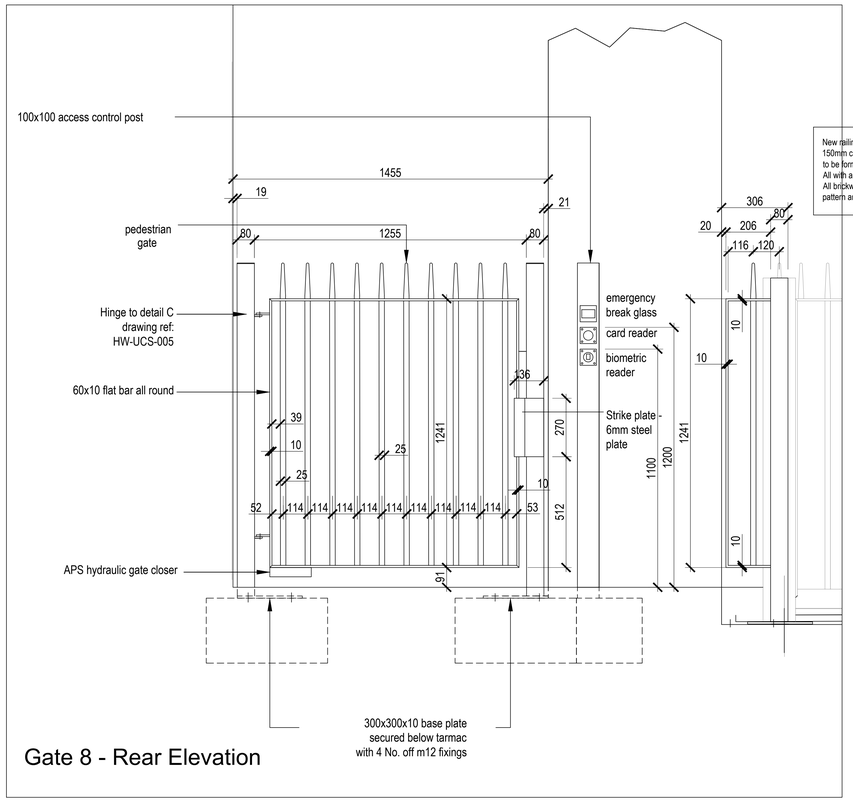

Gate 8 - Rear Elevation

New railing / gates are to be formed in 25x25 square section bars with 150mm chamfered finials at the head to match the existing. Framing is to be formed in 60x10mm steel bar all edges welded.
All with a black gloss paint finish. Unless otherwise stated.
All brickwork is to be completed in reused brickwork laid in bonding pattern and jointing to match that of the existing laid in lime mortar.

1:10

400mm 0 400mm 800mm 1200mm 1600mm 2000mm

Photo Cell

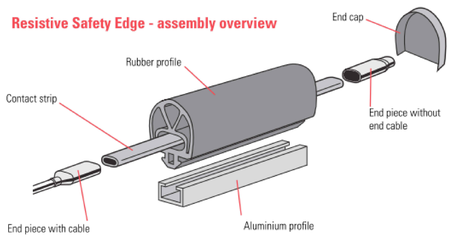

Safety Edge

Detail E

Rev.	Date	Description	By	Ch.k
B	11.06.18	additional detail added	LC	

Drawing Status: FOR APPROVAL

HOLLYWELL BUILDING SERVICES

New Barnes Mill, Cottonmill Lane, St. Albans, Hertfordshire AL1 2HA
T: 01727 810555
F: 01727 810666
E: bob@hollywell.co.uk
W: www.hollywell.co.uk

Client:

Project: FROGNAL LANE NW2

Drawing Title: NEW GATES & RAILINGS TO SITE BOUNDARY - Gates 8 & 9 Details 2

Drg No.: HW-UCS-006

Revision: B

Scale	Date	Engineer	Checked
1:10 @ A0	MAY 18		