

100mm @ A0 (50mm @ A2)

- This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.

5 Care to be taken not to cut / adversely affect existing retained beams / columns while demoliton is taking place. Contractor to undertake careful exponentory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition

- 6 Treat all cut concrete faces with Ronabond concrete
   repair system by Konscrete, or similar concrete
   repair system
   repair system 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are depert than the existing founding levels and notify the engineer accordingly

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and reveant acrive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

# hoenel noitile

	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
	RC / Masonry wall demolished




STRUCTURAL ENGINEERS


hts.uk.com

296-302 Lincoln House High Holborn, WC1


Drawing Title
Demolition Perspective Sections


Purpose of Issue Preliminary Scale at A0 Drawing No 1392 / D002 Rev P1

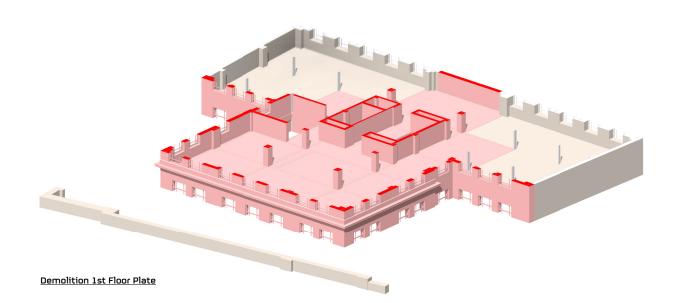

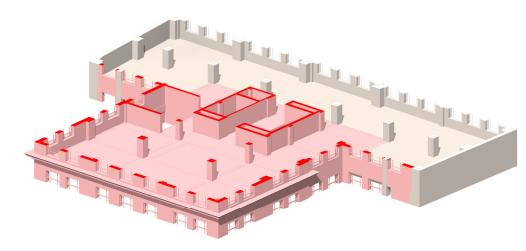



Demolition 4th Floor Plate

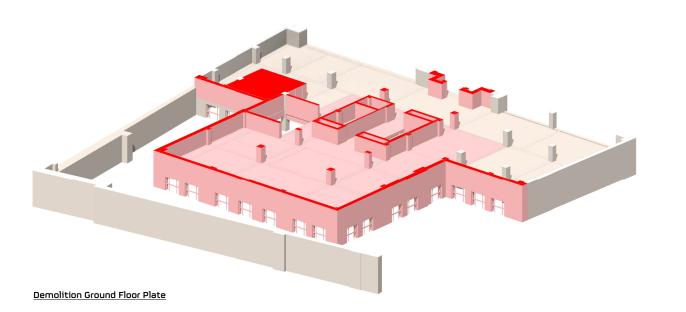

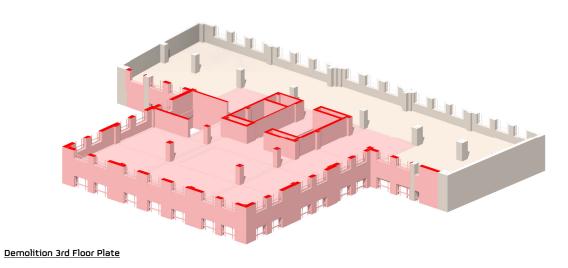



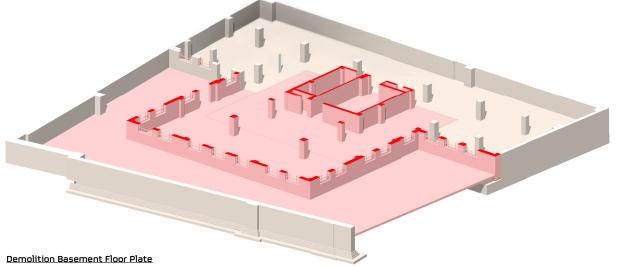

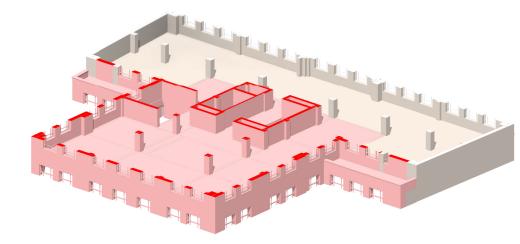

Demolition 2nd Floor Plate

- This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are lo confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

## Demolition legend

	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
	RC / Masonry wall demolished

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS


<sup>Job Name</sup> 296-302 Lincoln House High Holborn, WC1


Drawing Title Demolition Floor Plates -Sheet 1

Purpose of Issue Preliminary Scale at A0
Drawing No 1392 / D005 Rev P1

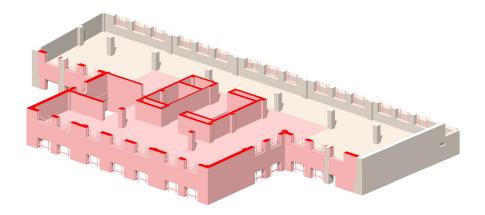


## Demolition 7th Floor Plate

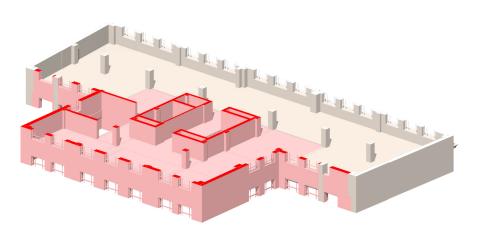


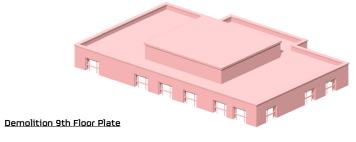

Demolition 6th Floor Plate

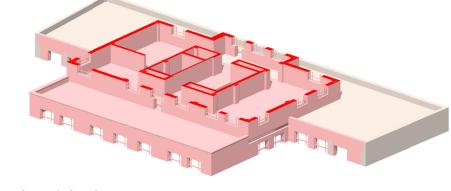

Demolition 8th Floor Plate

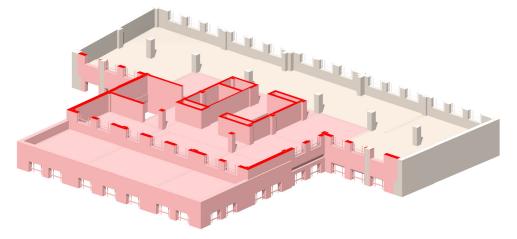

Demolition 5th Floor Plate

 This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.

100mm @ A0 (50mm @ A2)

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discregancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and awalt turble instruction

#### Demolition legend

	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
-	RC / Masonry wall demolished

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sup>Job Name</sup> 296-302 Lincoln House High Holborn, WC1

Drawing Title Demolition Floor Plates -Sheet 2

Purpose of Issue Preliminary Scale at A0
Drawing No 1392 / D006 Rev P1

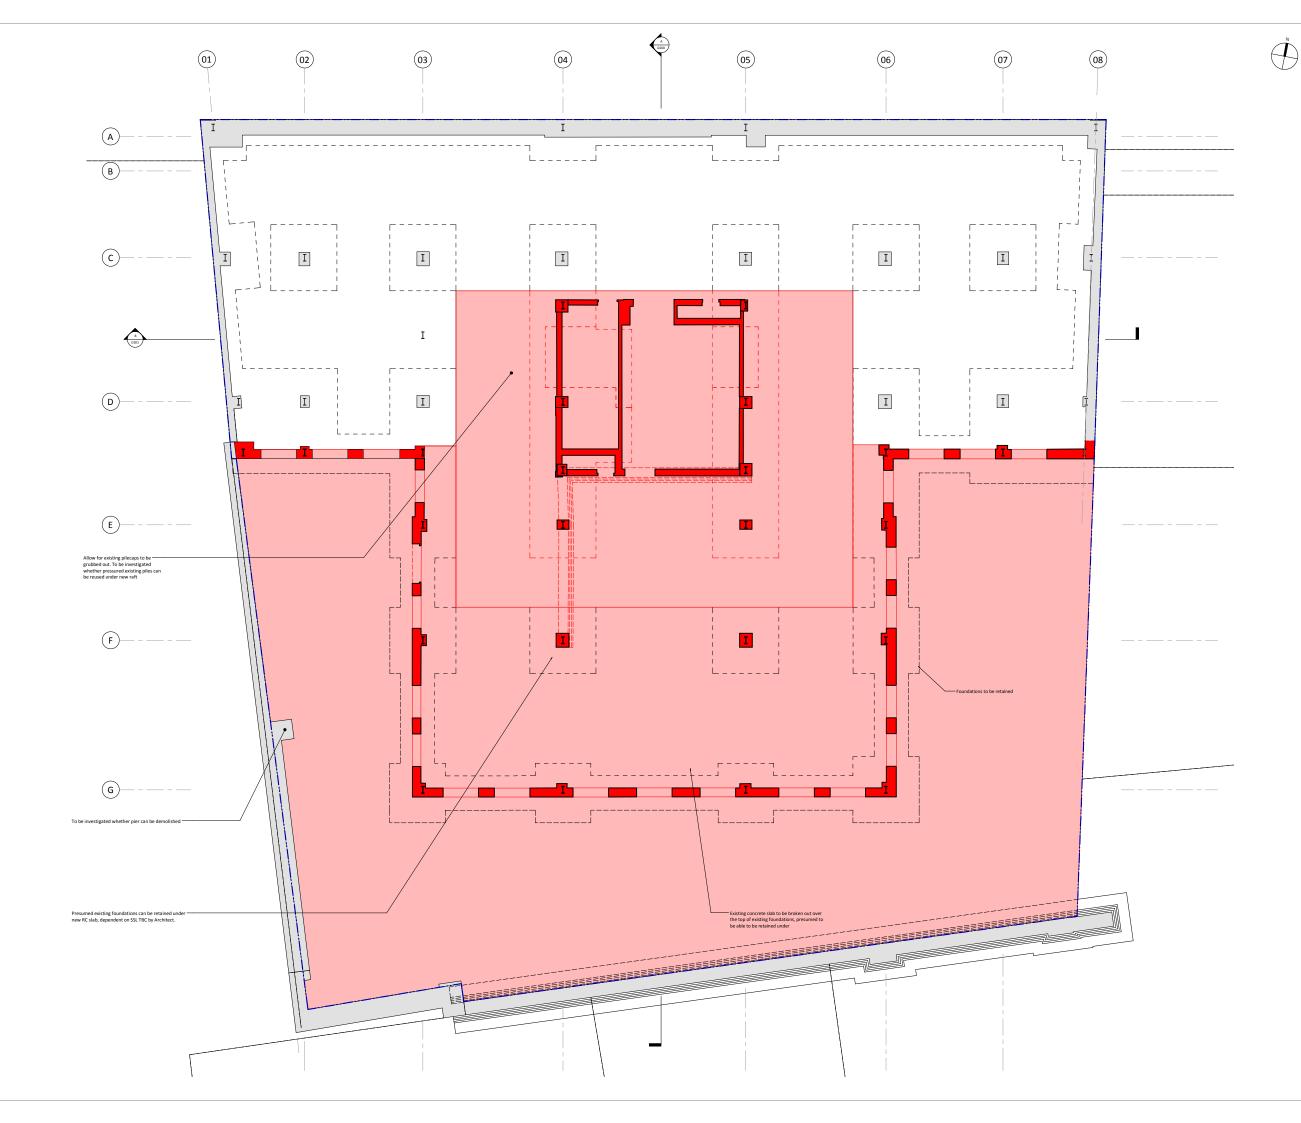

100mm @ A0 (50mm @ A

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

#### Demolition legend

	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
	RC / Masonry wall demolished

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title Lower Ground Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	090	Rev	Ρ1

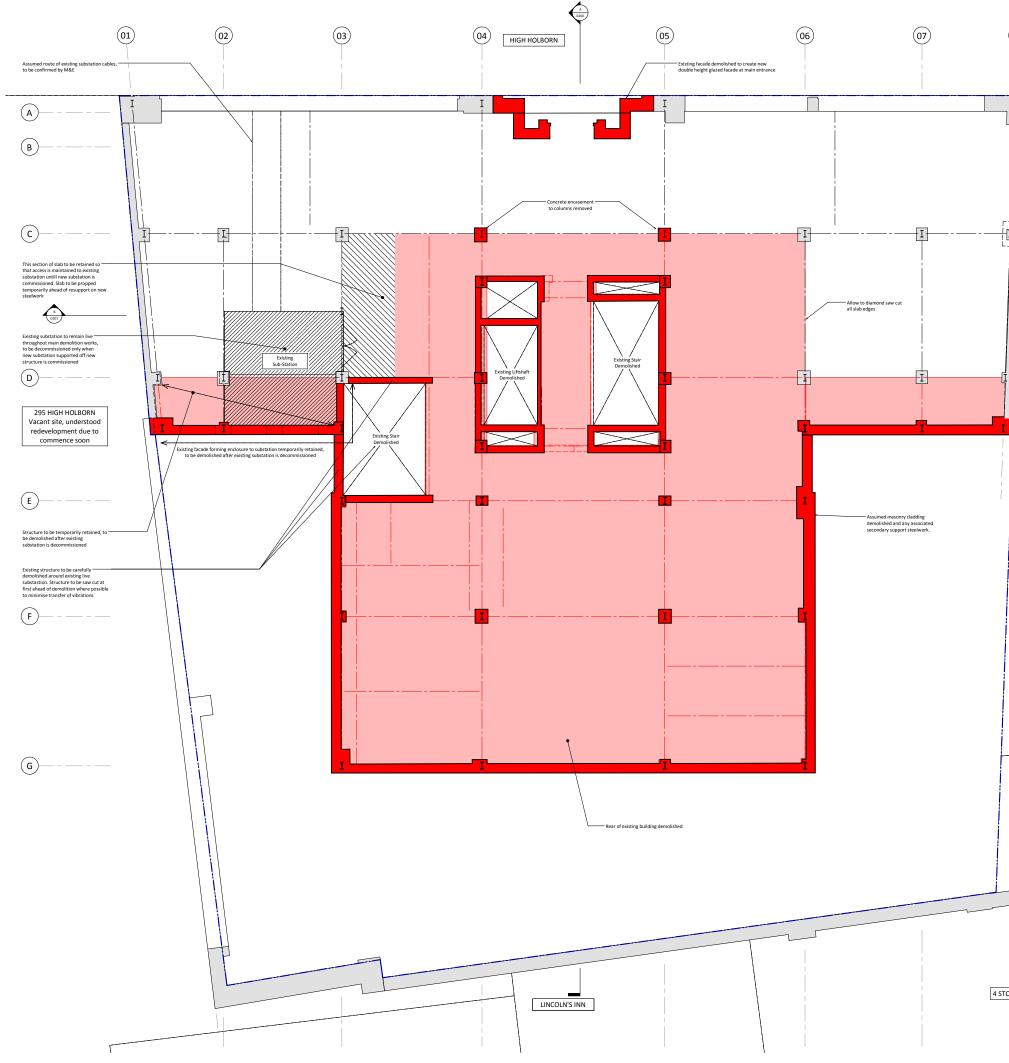

08	
I	
	303-306 HIGH HOLBORN

(

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work.
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

#### Demolition legend

	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
_	RC / Masonry wall demolished

 P2
 10.02.17
 LG
 RB
 Stage 2 Issue

 P1
 16.12.16
 MC
 RB
 Issued for Planning Preapp

 Rev
 Date
 By
 Eng
 Amendments



STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title Ground Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	100	Rev	P2

4 STONE BUILDINGS





100mm @ A0 (50mm @ A3

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

## Demolition legend

Demonicion legend	
	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
-	RC / Masonry wall demolished

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

1st Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	0110	Rev	P1

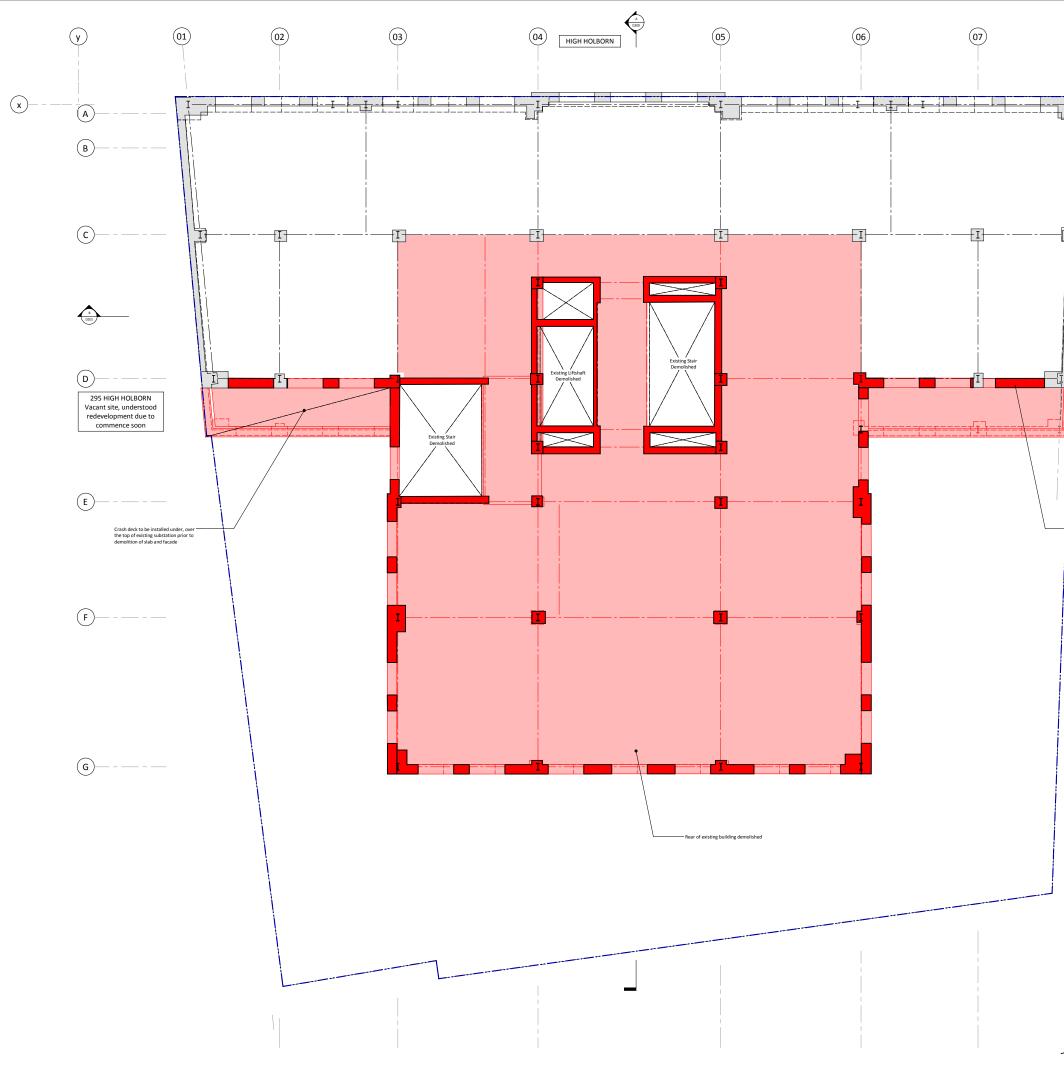

08	
	<b>_</b>
	303-306 HIGH HOLBORN

Existing cladding to be demolished and any associated secondary steelwork. Existing columns and beams to be retained.

\_\_\_\_\_



- 1 This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work.
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and researual trachie information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site by should notify the engineer immediately, and await further instruction

#### Demolition legend

Demontion legend	
	Area of floor to be demolished
	Beam demolished / removed
I	Column demolished / removed
	RC / Masonry wall demolished

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

2nd Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	120	Rev	P1

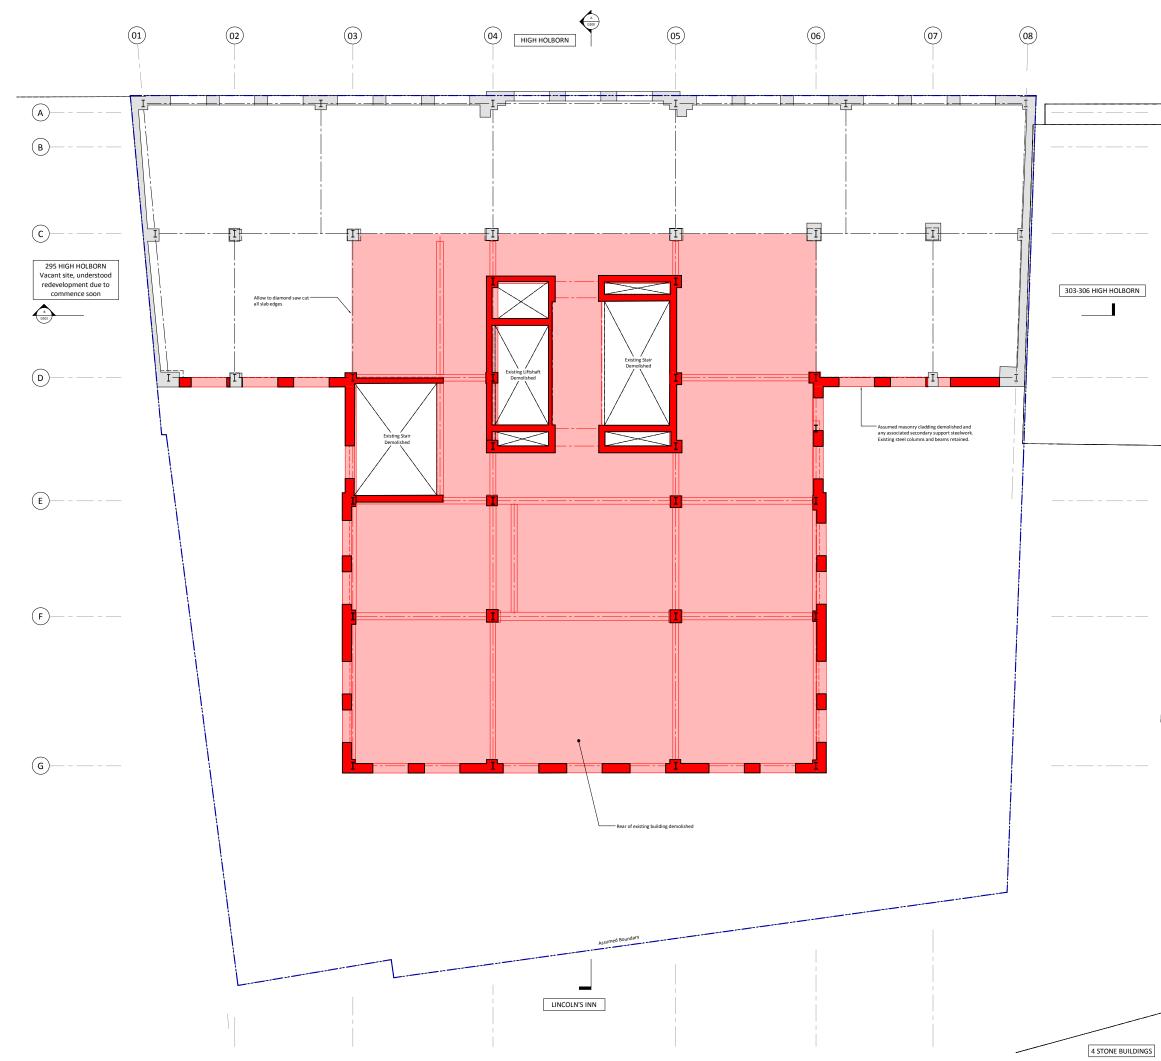



100mm @ A0 (50mm @ A

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work.
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are and and conditions are discover any discrepanics between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

## Demolition legend

Bennentien legene		
	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
-	RC / Masonry wall demolished	

P2	10.02.17	LG	RB	Stage 2 Issue
P1	16.12.16	MC	RB	Issued for Planning Preapp
Rev	Date	Ву	Eng	Amendments




STRUCTURAL ENGINEERS hts.uk.com

Job Name 296-302 Lincoln House High Holborn, WC1

3rd Floor Demolition Plan

Purpose of Issue Preliminary Scale at A0 1:50 Drawing No 1392 / D130 Rev P2

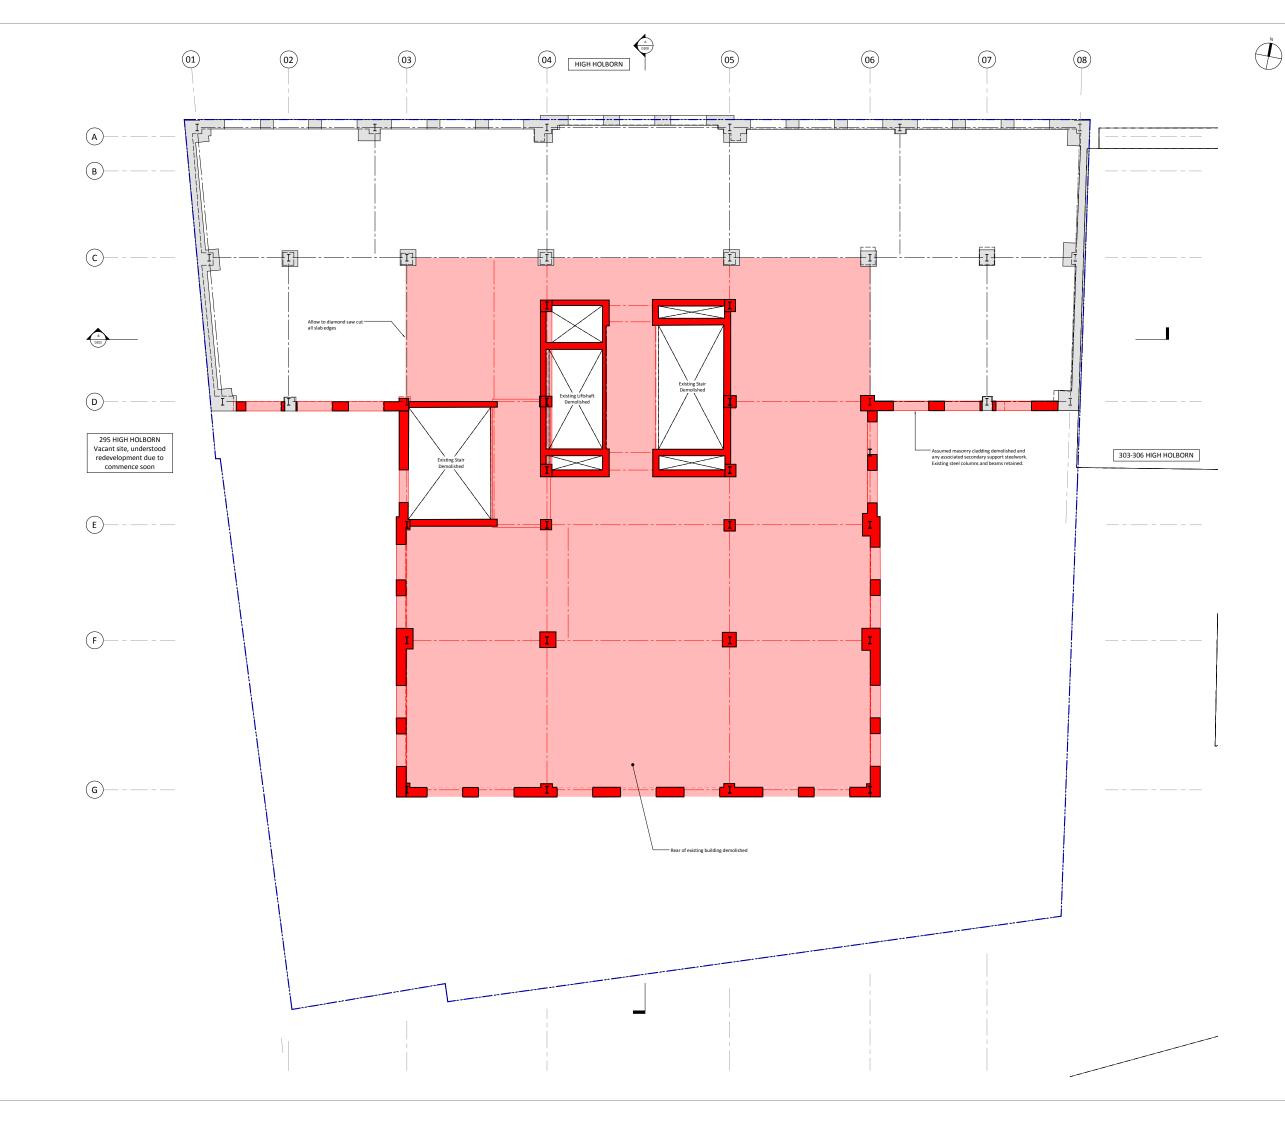

100mm @ A0 (50mm @ A3

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepanics between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

## Demolition legend

Demontion legene		
	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
_	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title 4th Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/D	140	Rev	Р1

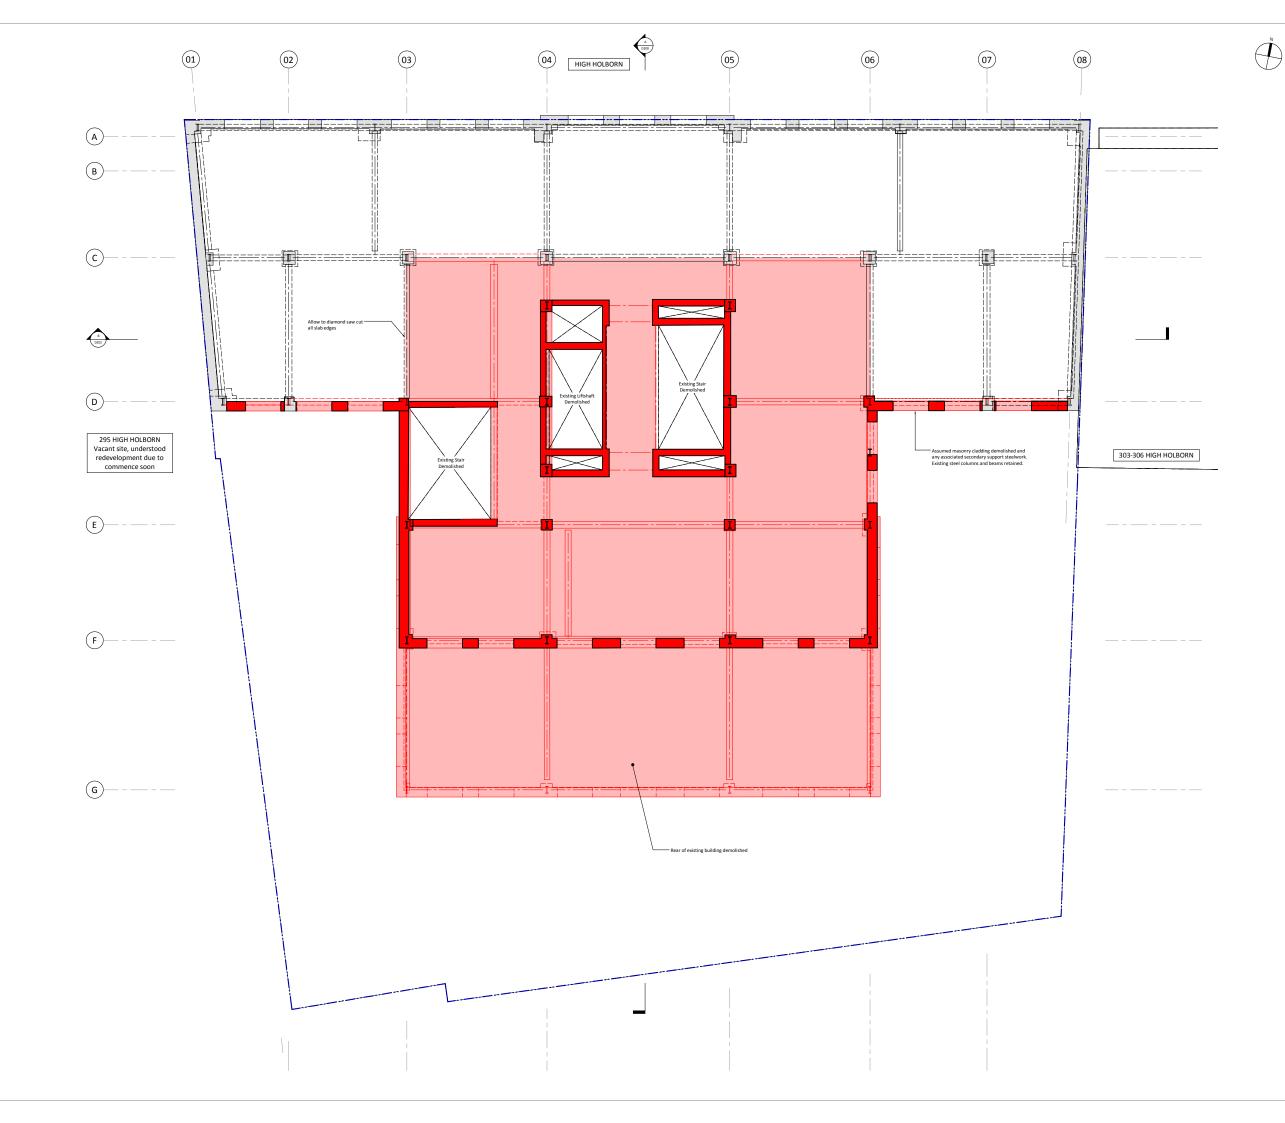

100mm @ A0 (50mm @ A3

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on alter also are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

#### Demolition legend

	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title 5th Floor Demolition Plan

Drawing No	1392/0	0150	Rev	Р1
Purpose of Issue	Preliminary	Scale at A0		1 : 50

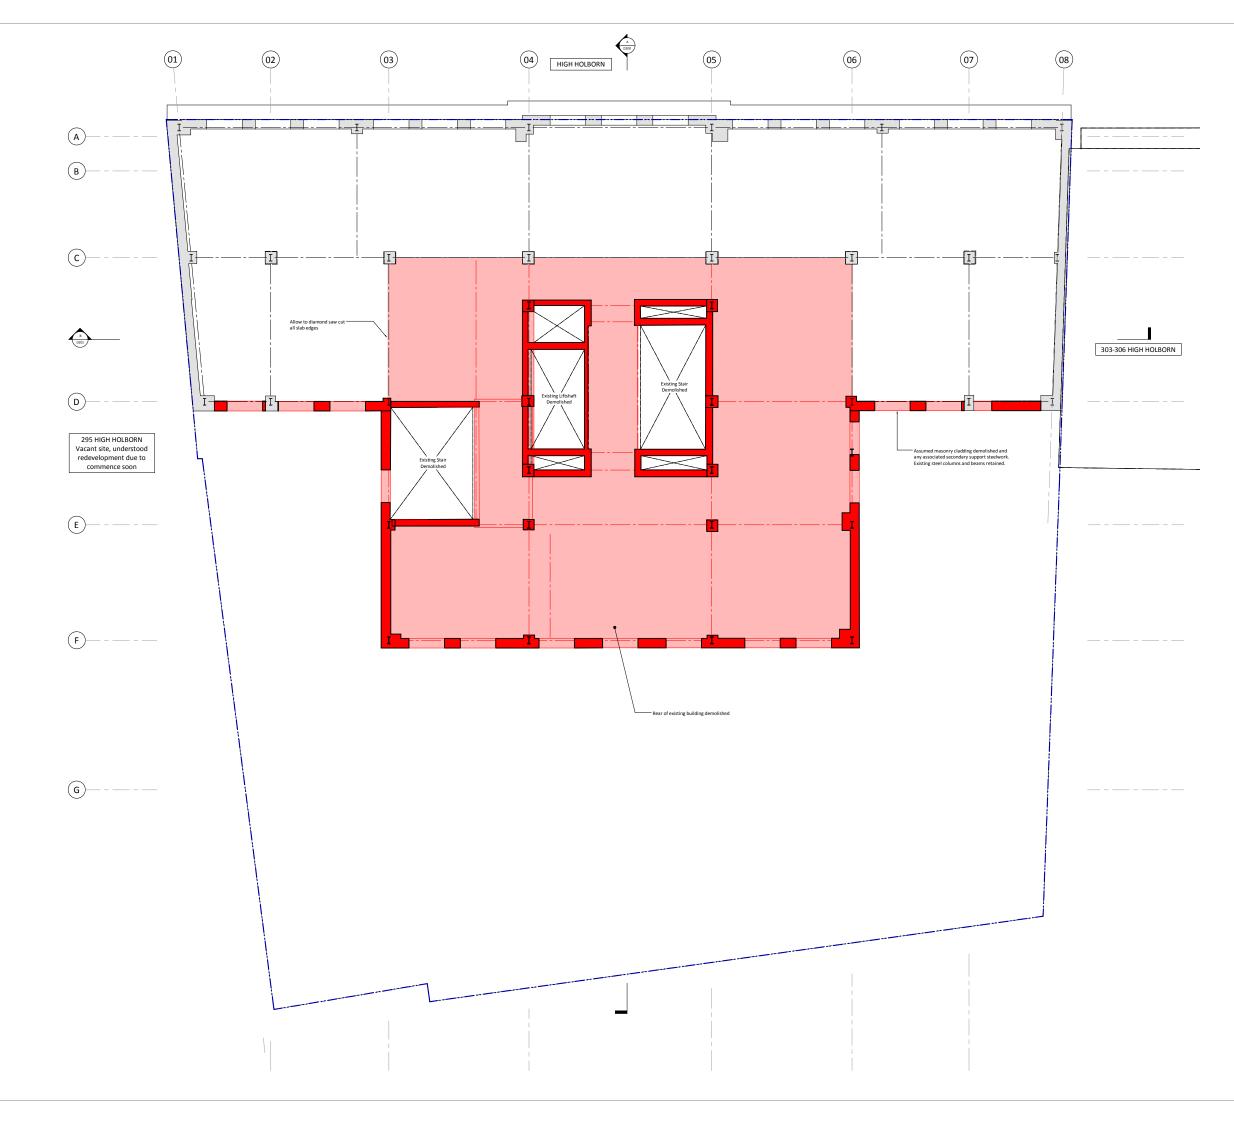



- 1 This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and researual trachie information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site by should notify the engineer immediately, and await further instruction

#### Demolition legend

Demonton legene		
	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
-	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title 6th Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	160	Rev	Р1

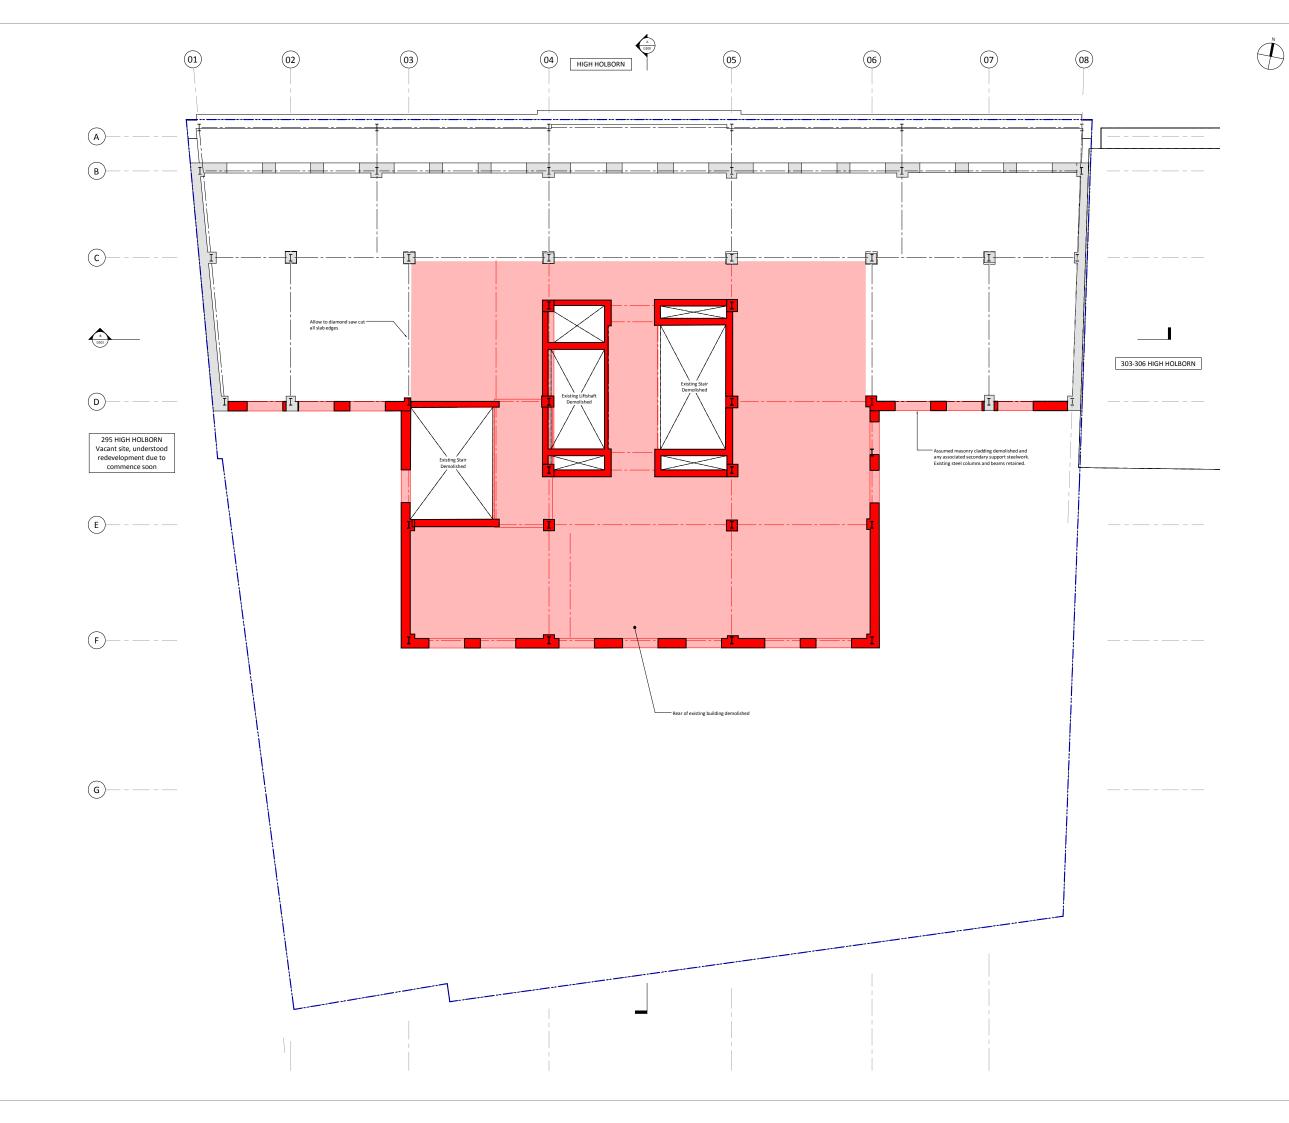

100mm @ A0 (50mm @ A

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepanics between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

#### Demolition legend

Demonton legene		
	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
-	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments



STRUCTURAL ENGINEERS

<sup>Job Name</sup> 296-302 Lincoln House High Holborn, WC1

Drawing Title 7th Floor Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/D	170	Rev	Ρ1



100mm @ A0 (50mm @ A3

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and researual trachie information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site by should notify the engineer immediately, and await further instruction

## Demolition legend

Demonton legene		
	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
-	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments





STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title 8th Floor Demolition Plan

Purpose of Issue Preliminary Scale at A0 1:50	Drawing No	1392/D	180	Rev	Р1
	Purpose of Issue	Preliminary	Scale at A0		1 : 50

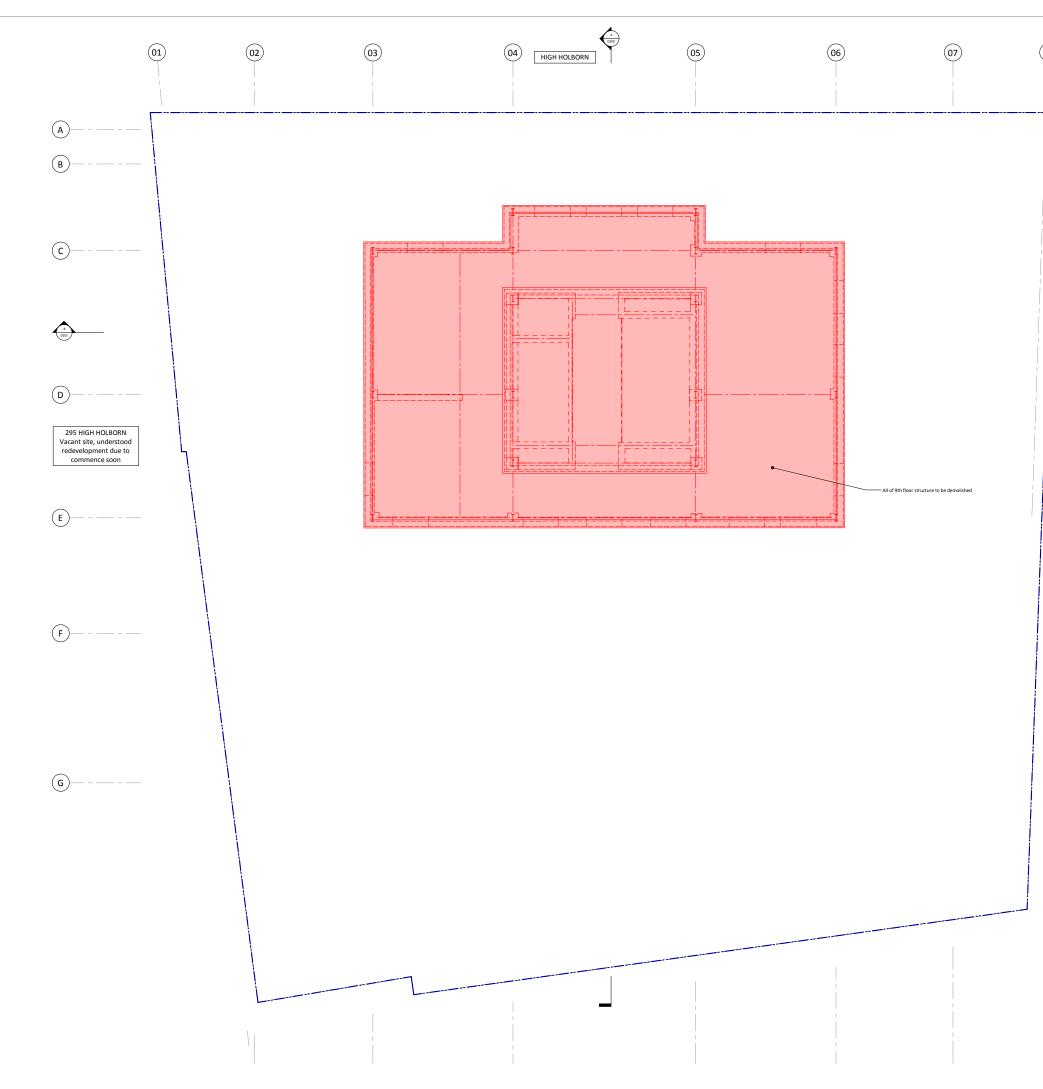

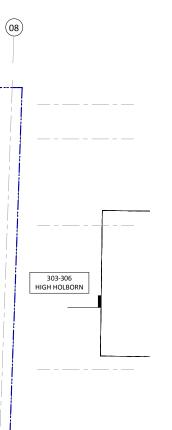

100mm @ A0 (50mm @ A2)

- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and researual trachie information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site by should notify the engineer immediately, and await further instruction

#### Demolition legend

	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sup>Job Name</sup> 296-302 Lincoln House High Holborn, WC1

Drawing Title Roof Demolition Plan

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/D	190	Rev	Ρ1

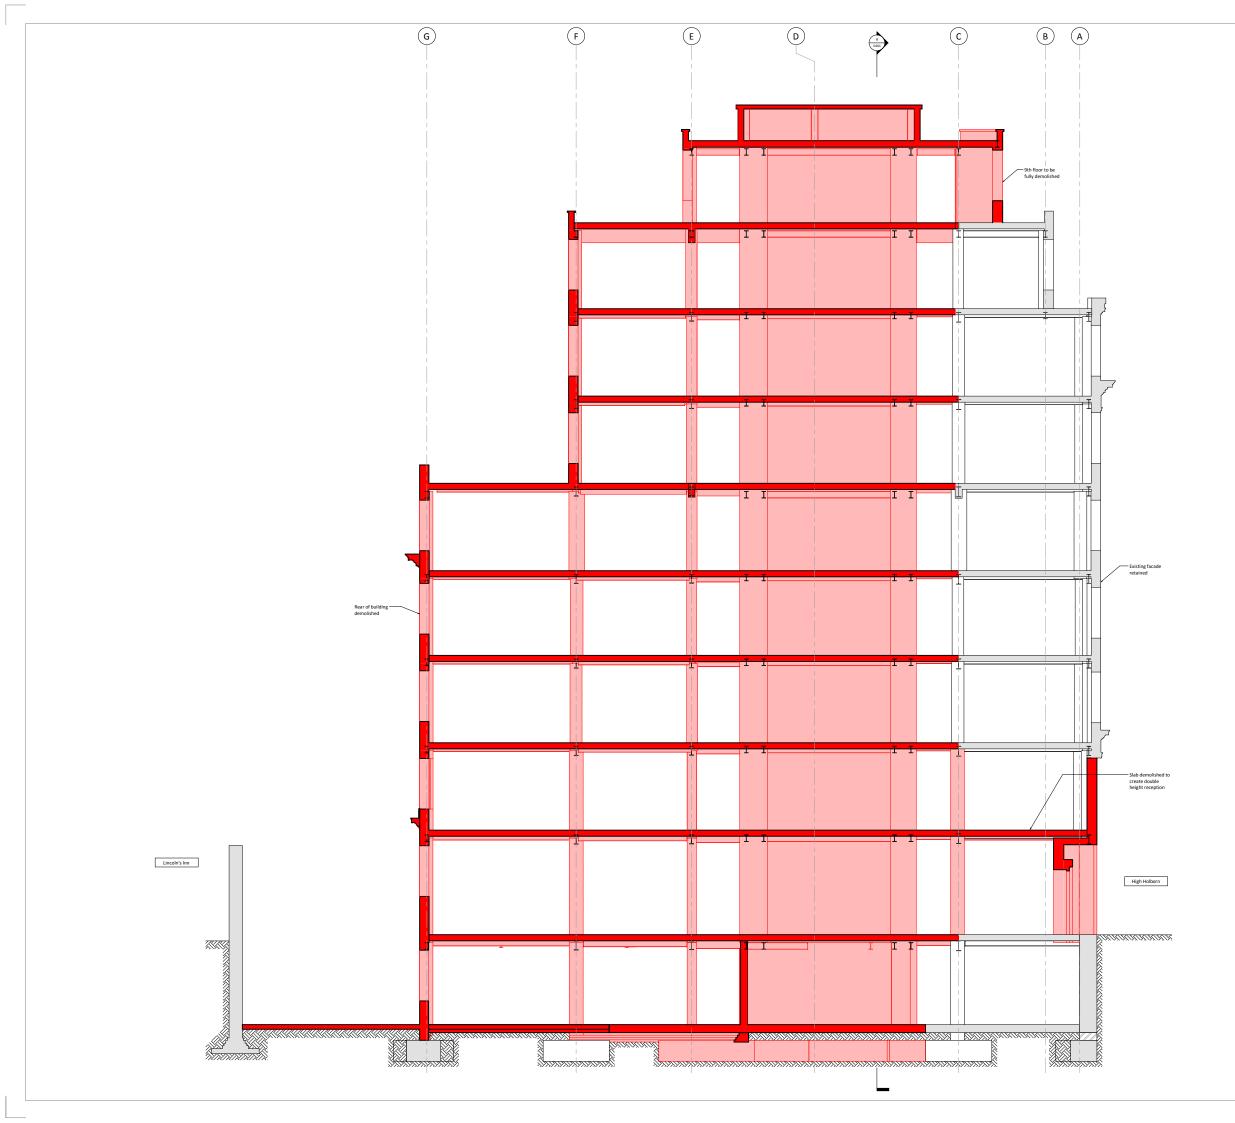

- یون به می از م از می از م
- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work.
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All deals of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on us the thy should notify the engineer immediately, and await further instruction

#### Demolition legend

Demontion legene		
	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
	RC / Masonry wall demolished	

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments




STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title Demolition Section A-A

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	200	Rev	P1

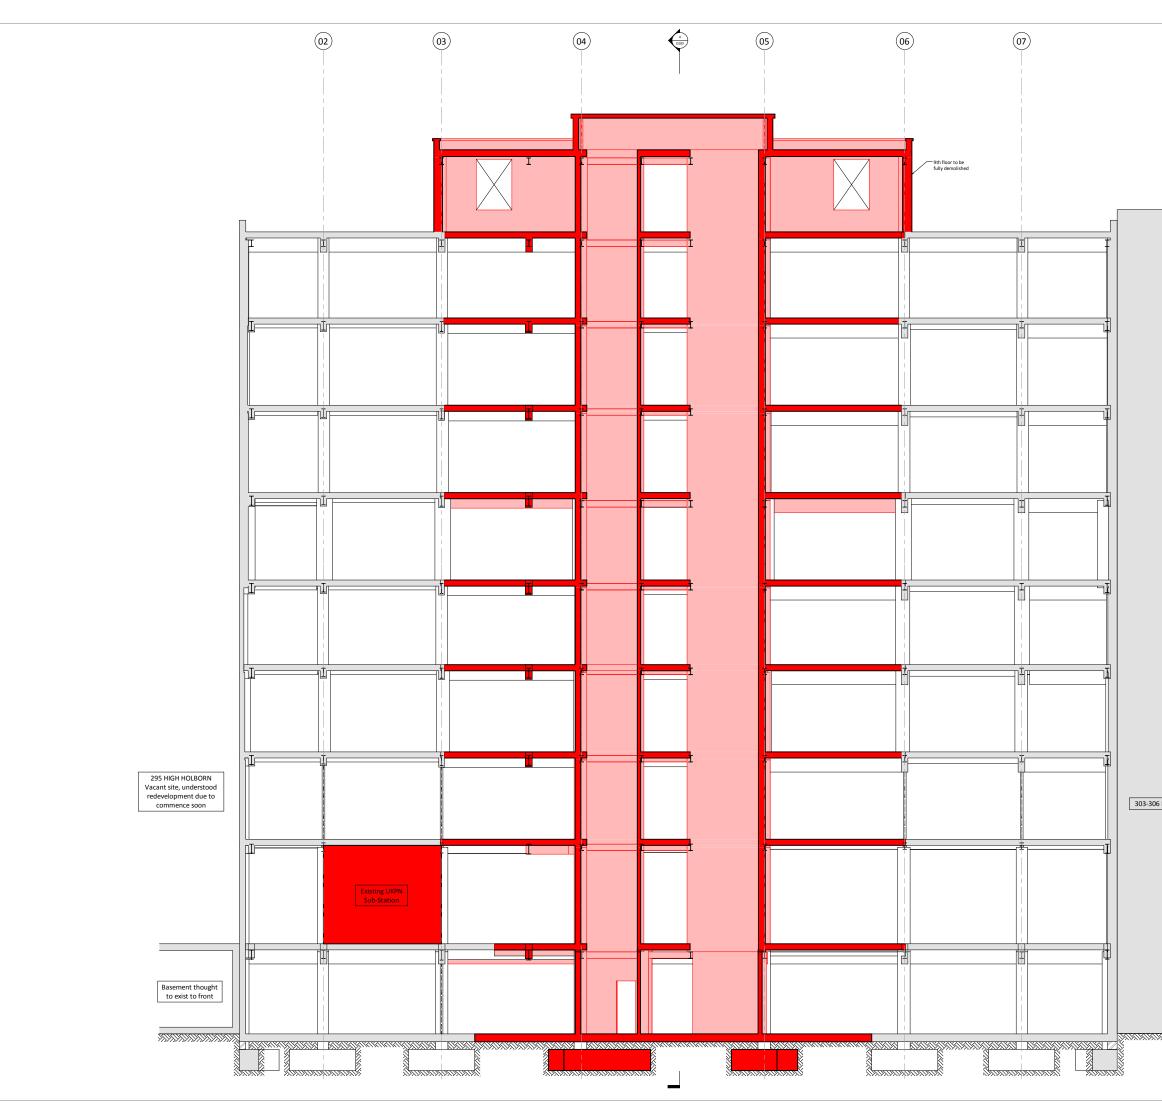

- 100mm @ A0[10mm @ A0] 1 This drawing is to be read in conjunction with all relevant architects, engineers and specialists drawings and specifications.
- 2 Do not scale from this drawing in either paper or digital form. Use written dimensions only. To check drawing has been printed to the intended scale the above bar should be 100mm long
- 3 All demolition drawings are to be read in conjunction with proposed plans
- 4 Assume all edges of RC are to be disc-cut UNO Where edges of slab are to be demolished, floors are to be disc cut to face of nearest beam if applicable.
- 5 Care to be taken not to cut / adversely affect existing retained beams / columns while demolition is taking place. Contractor to undertake careful exploratory works and submit appropriate method statement to ensure retained structure is not damaged undertaking areas of demolition
- 6 Treat all cut concrete faces with Ronabond concrete repair system by Ronacrete, or similar concrete repair system
- 7 Temporary bracing required prior to demolition of existing stability cores and until the new stability structure is in place. Contractor to submit full temporary works and sequencing proposal to the CA for review prior to commencing work.
- 8 The foundations of the existing structure must not be undermined. Upon exposing the retained structures the contractor should identify if any proposed excavation levels are deeper than the existing founding levels and notify the engineer accordingly
- 9 All existing structure is to be identified before any demolition is to take place.
- 10 The contractor is responsible for the temporary stability of the existing structure and those adjacent to it. The contractor is to design and construct all necessary temporary support systems.
- 11 This drawing shows structure to be demolished. All non structural items are not shown for clarity. Refer to the Architect's drawings for non-structural demolition elements.

The existing structural information shown on these drawings is based on visual inspection of the building, limited opening up works and relevant archive information. All details of the existing construction are subject to confirmation by the Contractor during the works on site. No materials are to be ordered until the relevant details and conditions are confirmed by the Contractor on site. Should the contractor discover any discrepancies between the assumed existing structure and what is found on site they should notify the engineer immediately, and await further instruction

#### Demolition legend

	Area of floor to be demolished	
	Beam demolished / removed	
I	Column demolished / removed	
	RC / Masonry wall demolished	

303-306 HIGH HOLBORN

IKIKIKIKIKI

 P1
 10.02.17
 LG
 RB
 Stage 2 Issue

 Rev
 Date
 By
 Eng
 Amendments



STRUCTURAL ENGINEERS

<sub>Job Name</sub> 296-302 Lincoln House High Holborn, WC1

Drawing Title
Demolition Section B-B

Purpose of Issue	Preliminary	Scale at A0		1 : 50
Drawing No	1392/0	201	Rev	P1