

New PV panels to flat roof. Central maintenance walkway with fall restraint system to be provided

Perimeter gravel vegetation barrier/drainage channel - set back to be 300mm from inside face of parapet wall, and 500mm from inside face of parapet walls to adjacent properties



Brown roof, previously on level below

Standard size 2 x 1m walk-on rooflight with trickle vent - previously on level below

Rooflight

PV panels, previously on floor below

Existing rooflight to unit below

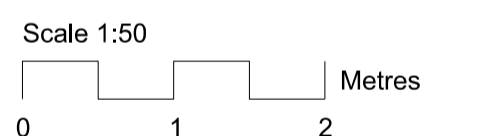

Revisions

01	Issued For Planning	26.07.18
----	---------------------	----------

Client
Consolidated Ltd.

Project
Neal Street Rooftop

Drawing Title
**Proposed Roof Plan
 Endell Street Rooftop**

Drawing Number
1455_00_204

Scale 1:50@A1 Status **For Planning**

Drawn by GW Date 23.09.2016

Do not scale. All dimensions to be confirmed on site. Information contained in this drawing is the sole copyright of Ian Chalk Architects and is not to be reproduced without permission.