
## PROPOSED AMENDMENT DRAWING


246868-A\_A-XX-XX-DR-AX-30520 East Elevation

#### Amendment

(1) A change in materials to the transoms at the top of cores from stone to anodised aluminium is proposed. Each transom is 7m wide and following design development deemed structurally unachievable given weight and aesthetic requirement for unobstructed panoramic glazing panels. This affects 6 of the 10 transoms at the top of each core. The remaining 4 are natural anodised aluminium as approved.


(2) Introduction of additional mullion to separate back painted glass spandrel panel from vision glazing - note spandrel panel hides steel column behind.

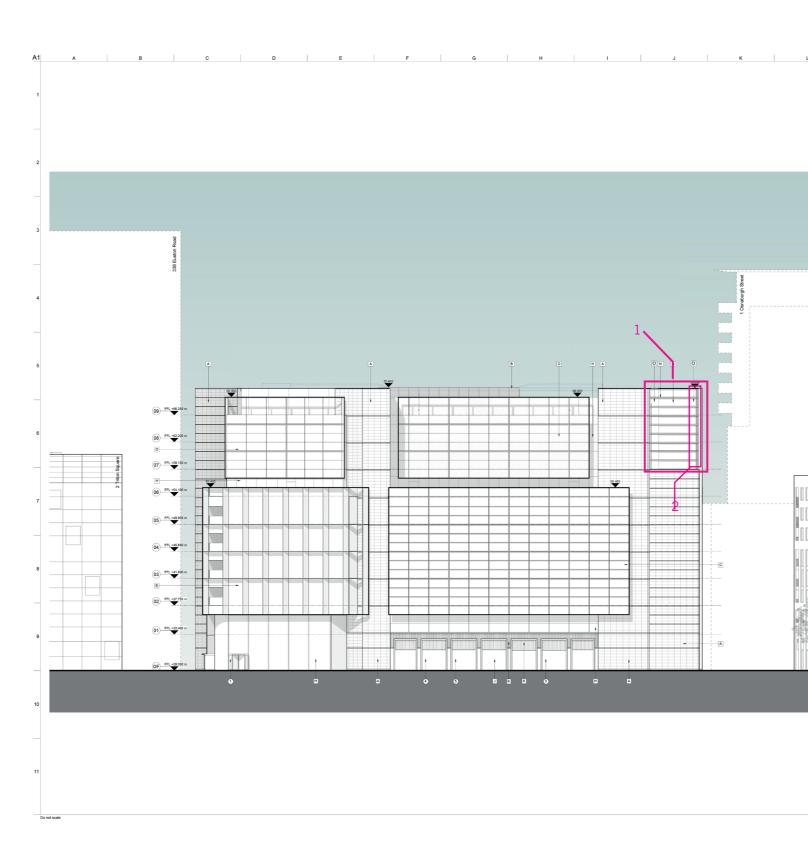


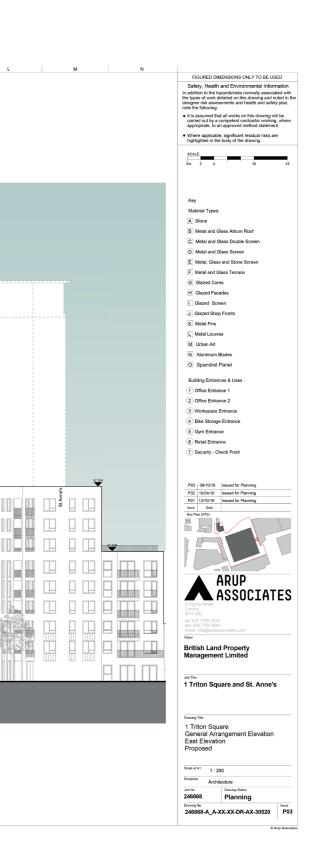

# CONSENTED PLANNING DRAWING

### 246868-A\_A-XX-XX-DR-AX-30530 South Elevation

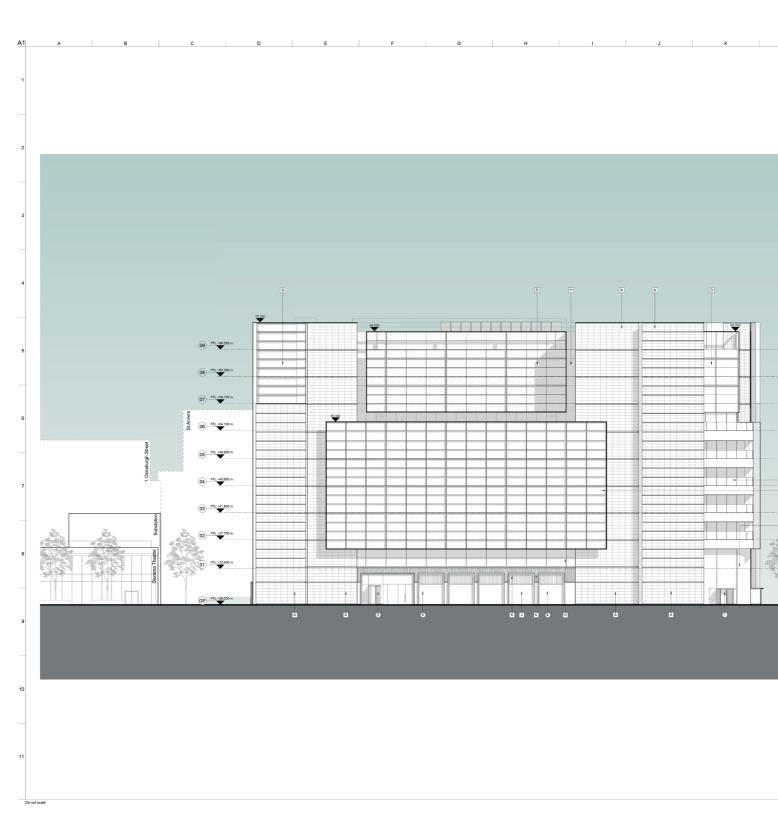

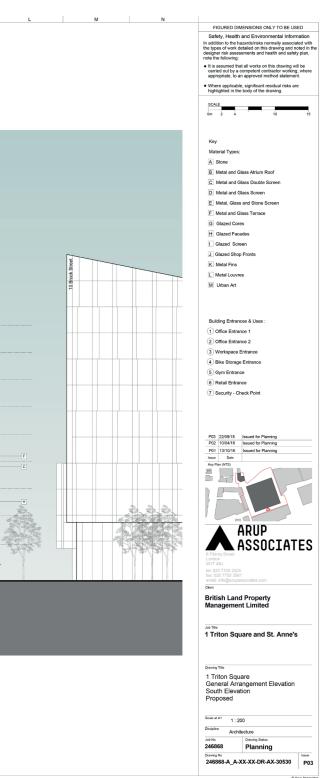

## NO.1 TRITON SQUARE