

Legend

- ① 3.14100 Small Platform Hut with ladder
Platform height 1,00 m, with steel feet
- 3.42035 Attachment for Tunnel Slide to huts
- ② 3.68000 Tunnel Slide, stainless steel, attachment height 3,00m, inclination 35°


alternatively:

- ③ 3.68000 Tunnel Slide, stainless steel, attachment height 2,40m, inclination 35°

- safety distance according to EN 1176
- ↔ safety distance
- ↔ site / equipment


Information on installation of slides
Care should be taken that slides are not oriented to a southeast and southwest direction (heating up of material). If this is not possible, appropriate measures must be taken to ensure the provision of shade. In the case of tunnel slides, this is only necessary for the open run-out area.


General information for clients
The contractor is responsible for checking that all conditions necessary for configuration of the children's playground equipment are met (space requirements, available space, necessary ground elevation, existing ground elevation, etc.). This also includes supply lines (under and above ground) and consideration of any other possible constraints of the location. The client is to ensure on site that surfacing is constructed in compliance with EU standards on free height of fall.

Building projekt	Gloucester Gate Playground - Slide			
Equipment				Quotation/Order-No AN239782
Customer	TimberPlay Ltd. Aizlewood's Mill ---- Nursery Street Sheffield S3 8GG			
Equipment proposal	Richter Spielgeräte GmbH Simsseestraße 29 D-83112 Frasdorf + 49 8052-17980		Scale 1:100 Title ground view / side view Date 20.02.2019 Name F. Rottenkolber	Size A3 Page 1-2

Information on installation of slides
Care should be taken that slides are not oriented to a southeast and southwest direction (heating up of material). If this is not possible, appropriate measures must be taken to ensure the provision of shade. In the case of tunnel slides, this is only necessary for the open run-out area.

General information for clients
The contractor is responsible for checking that all conditions necessary for configuration of the children's playground equipment are met (space requirements, available space, necessary ground elevation, existing ground elevation, etc.). This also includes supply lines (under and above ground) and consideration of any other possible constraints of the location. The client is to ensure on site that surfacing is constructed in compliance with EU standards on free height of fall.

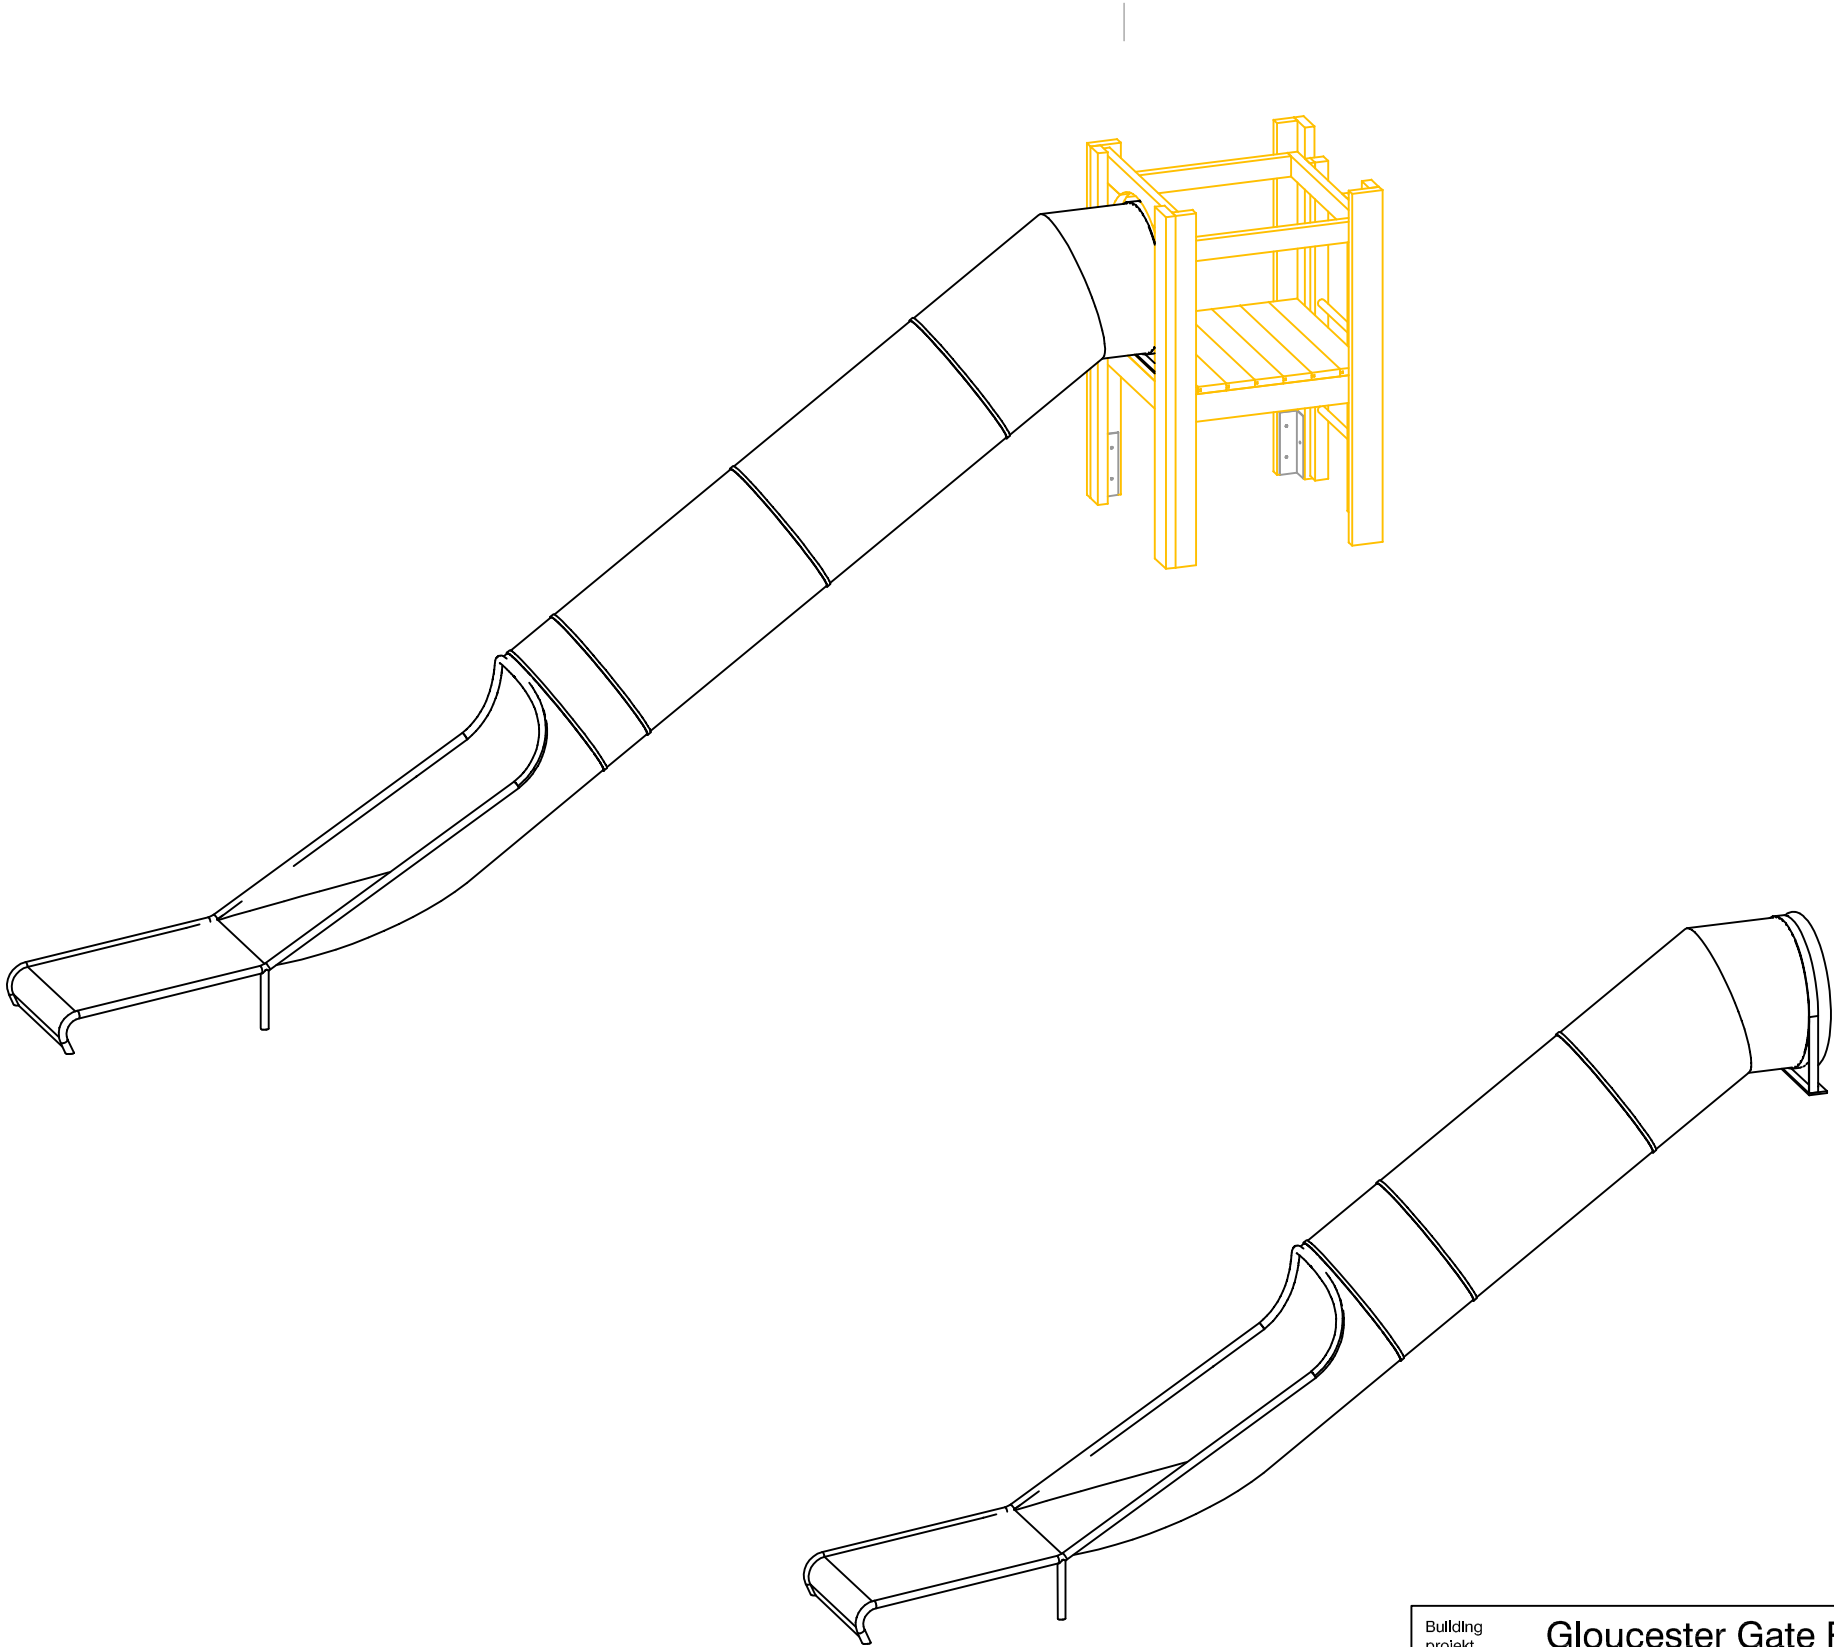

Building projekt	Gloucester Gate Playground - Slide				
Equipment			Quotation/Order-No	AN239782	
Customer	TimberPlay Ltd. Aizlewood's Mill ----- Nursery Street Sheffield S3 8GG				
Equipment proposal	Richter Spielgeräte GmbH Simsseestraße 29 D-83112 Frasdorf + 49 8052-17980				
	Scale	not to scale		Size	A3
	Title	perspectives			
	Date	20.02.2019			
	Name	F. Rottenkolber		Page	2-2