




- 3.01.01 Replace damaged slates to existing pitched roof
- 6.02.07 New insulated dry lining
- 3.02.01 Parapet gutters, hip rolls and abutment flashings - spot repairs (subject to inspection)
- 4.08.02 New roof guarding to match existing (no 36)

0.06.04 Carefully remove internal partition

- 1.01.02 New steelwork to support load bearing lobby wall above. To Structural Engineer's details
- 1.01.01 New steelwork to seminar room B03, including new foundations. To Structural Engineer's details

8.04.12 Redecorate existing external metalwork

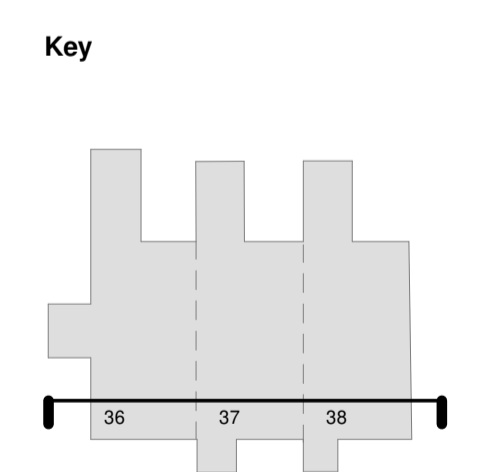

- Roof Top 16265
- Fourth Floor 14100
- Third Floor 11200
- Second Floor 7695
- First Floor 3780
- Ground Floor 0
- Lower Ground -3040

5.06.01 New external door and fan light in modified window opening

0.07.03 Remove modern side screen. Retain original fan light above

7.01.14 Relocate mantel piece from demolished chimney breast wall

- 0.06.01 Carefully remove wall and chimney breast to Seminar Room B03
- 0.06.02 Carefully remove load bearing wall

**Nicholas Hare Architects**  
 3 Bamsbury Square London NI 1JL  
 telephone +44 (0)20 7619 1670  
 fax +44 (0)20 7619 1671  
 e-mail info@nicholashare.co.uk

project UCL SEPP Gordon Square  
 for UCL  
 title GA Sections - Proposed - AA

| scale | size | drawing number          | rev. |
|-------|------|-------------------------|------|
| 1:50  | A1   | SEPP-NIHA-XX-PL-A-00230 | 00   |