



### KEYPLAN

### NOTES

- THE INTRUDER ALARM SYSTEM SHALL BE WIRED IN MULTICORE SECURITY SYSTEM CABLING BY THE ELECTRICAL CONTRACTOR. TAMPER PROOF PROTECTION IS TO BE PROVIDED TO ALL CIRCUITS & DEVICES.
- THE SYSTEM IS TO BE INSTALLED, TESTED & COMMISSIONED & CERTIFIED IN FULL COMPLIANCE WITH BS EN 50136-1:2012.
- THE ELECTRICAL CONTRACTOR SHALL EMPLOY THE SERVICES OF A REGISTERED ALARM INSTALLER.
- THE POWER SUPPLY FOR THE INTRUDER ALARM SYSTEM SHALL BE COMPLETELY DEDICATED WITH THE MAIN DISCONNECTION DEVICE SECURED FROM UNAUTHORISED OPERATION.
- ALL CABLING ASSOCIATED WITH CCTV SYSTEM TO BE CARRIED OUT BY THE ELECTRICAL CONTRACTOR UNDER THE INSTRUCTION OF THE SPECIALIST SECURITY CONTRACTOR.

### DOOR INTERCOM / DOOR ACCESS SYSTEM

- INTERCOM CALL STATION. IP65 RATED & VANDAL RESISTANT
- WALL MOUNTED VIDEO PHONE HANDSET C/W DOOR RELEASE FUNCTION AND INDUCTIVE AUDIO COUPLER.
- GREEN BREAK GLASS UNIT FOR EMERGENCY RELEASE.
- DOOR ACCESS REQUEST TO EXIT BUTTON (STAINLESS STEEL FINISH)
- TRANSMAGNETIC DOOR LOCKS C/W INTEGRAL INTRUDER ALARM CONTACTS.
- ACD CARD READER
- POWER SUPPLY UNIT
- INTRUDER ALARM PANEL.
- CCTV - FIXED CCTV CAMERA C/W VANDAL PROOF HOUSING.
- INTERNAL INTRUDER ALARM SOUNDER (SOUND BOMB TYPE).
- INTRUDER ALARM REMOTE KEYPAD AT 1350mm AFFL.

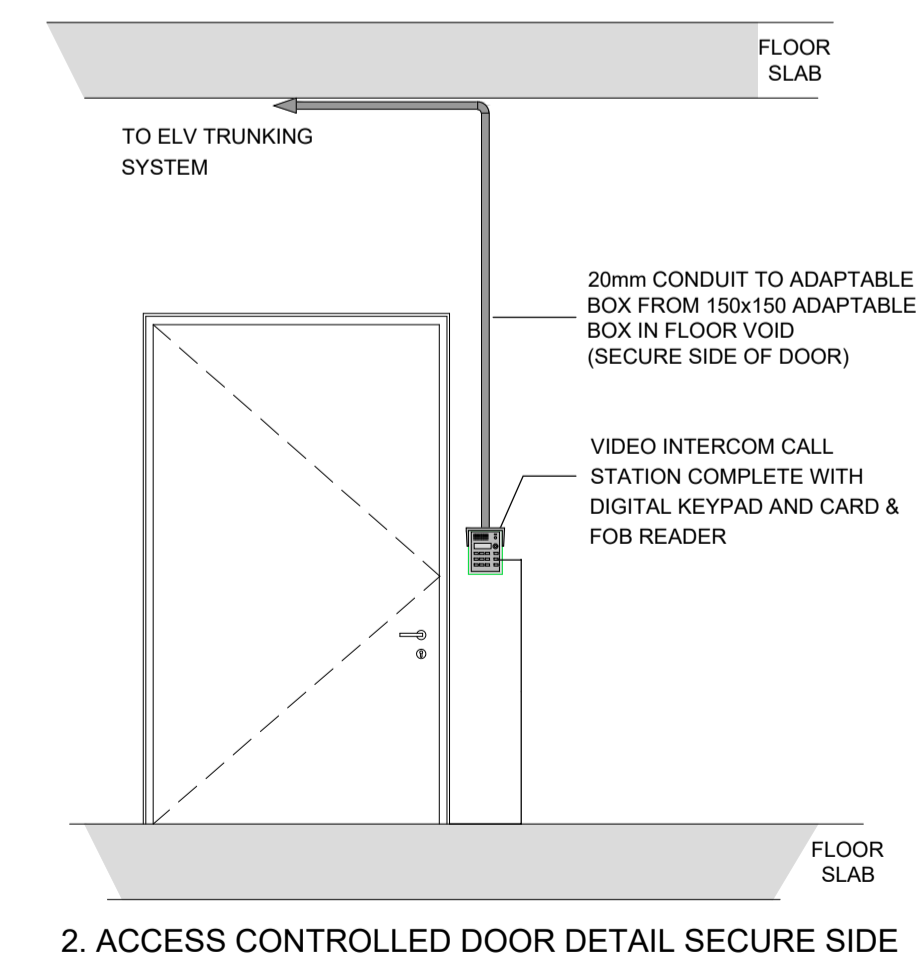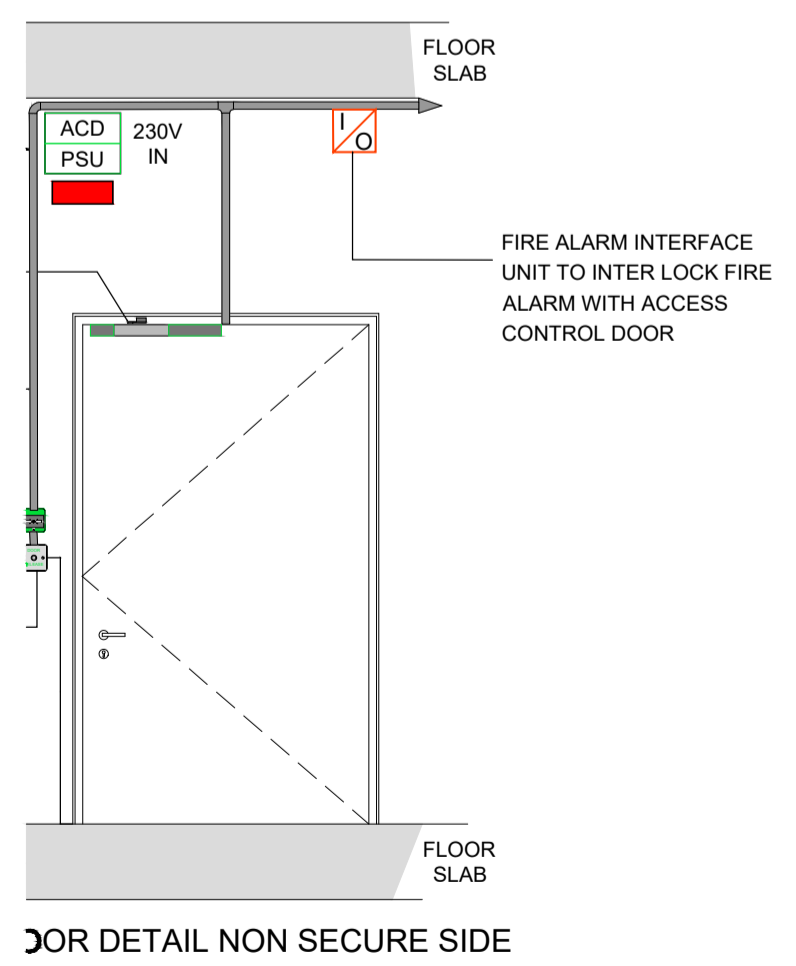

NOTE: ARCHITECTURAL DRAWING USED FOR COMPILATION OF IN2 DRAWING. ARCHITECTURAL DRAWING REVISION: DATE RECEIVED: 14.06.2019

STATUS	DATE	DESCRIPTION	DRN	ENG	APP	REV
S4	18.06.2019	CONSTRUCTION ISSUE	JDT	TH	BF	C2
S4	18.10.2018	CONSTRUCTION ISSUE	KO	TH	BF	C1

**IN2**  
ENGINEERING DESIGN PARTNERSHIP  
DUBLIN . ATHLONE . BELFAST . LONDON

PROJECT  
**BELSIZE PARK FIRESTATION**

CLIENT  
**PLATINUM LAND**

DRAWING TITLE  
**ELECTRICAL SERVICES INSTALLATION  
GROUND FLOOR LEVEL  
SECURITY & ACCESS CONTROL SERVICES LAYOUT**

SCALE  
1:100 @ A1  
1:200 @ A3

PROJECT REF:  
**L18051**

DRAWING No.  
**L18051-IN2-00-00-DR-E-8001**

STATUS  
**S4**

REVISION  
**C2**