

1-38-4811/2

# REPORT

on the impact on trees

of proposals for development

at

16 Bracknell Gardens, London, NW3 7EB

(2<sup>nd</sup> July 2019)



Registered Consultant of the Arboricultural Association  
John Cromar, Dip. Arb. (RFS), F.Arbor A.



JOHN CROMAR'S  
ARBORICULTURAL  
COMPANY  
LIMITED

•  
The Old School  
Titley  
HR5 3RN  
*at Wheatley, Oxford  
& Harpenden, Herts.*

TEL 01582 80 80 20  
FAX 01544 231 006  
MOB 07860 453 072

•  
[admin@treescan.co.uk](mailto:admin@treescan.co.uk)  
[www.treescan.co.uk](http://www.treescan.co.uk)

## 01

### Introduction and Instructions

I am instructed by Marek Wojciechowski Architects Ltd on behalf of clients to make an assessment of tree amenity value and condition of trees at 16 Bracknell Gardens, London, NW3 7EB and of the impact of a proposal for development (proposed internal changes and new external terrace) on such trees. Accordingly, I visited the property on 16<sup>th</sup> May, 2019 in order to carry out an inspection.

## 02

### Copyright

#### 02.01

Copyright is retained by the writer. This is a report for the sole use of the client(s) named above. It may be copied and used by the client in connection with the above instruction only. Its reproduction or use in whole or in part by anyone else without the written consent of the writer is expressly forbidden. The appended schedule of tree work, and the plan, may, without the written consent of the writer, be reproduced to contractors for the sole purpose of tendering.

## 03

### Notes

#### 03.01

##### PLANS

1-38-4811/2/P1 gives an approximate representation (in plan) of actual crown form, and is intended to indicate the relationship of neighbouring trees to each other, and should be read with the comments on crown shape and tree value in TREE DETAILS appended. The plan gives a quick reference assessment of value as per section 4, table 1, of BS 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'. Assessment of value in the TREE DETAILS table appended is, in accordance with this British Standard related mainly but not exclusively to the criterion of *visual value to the general public*. The Standard recommends a way of classifying trees when assessing their potential value in relation to proposed development. Some surveys may not include any trees of one or more categories. Table 1 suggests categories 'U', 'C', 'B' and 'A', in ascending merit. 'U' (RED crown outline on plan) category trees are dangerous \ low value trees that could require removal for safety or arboricultural reasons. 'C' (GREY or black/uncoloured crown outline on plan) category trees are of no particular merit, but in adequate condition for retention. 'A' category trees (GREEN crown outline on plan) are trees of high vitality or good form, or of particular visual importance: 'B' (BLUE crown outline on plan) category are good trees but may be of slightly poorer form or be not sited as importantly as 'A' category trees. See TREE DETAILS appended. Category Assessment appears in column 10. This standard also provides a way of determining an area (see TREE DETAILS column 7) – the RPA – root protection area - around the trunk of the tree in which protective measures should be used in order to prevent significant damage to trees. There are various ways of achieving this. A simple way is to use exclusion fencing, but other methods have been shown by established use to be very effective.

### 03.02

1-38-4811/2/P2 shows proposed retained trees and is colour-coded to indicate where arboricentric methods are proposed during the construction process.

## 04

### Sources and Documents

Ground level inspection.

Supplied plans :

Marek Wojciechowski Architects drg. no.: D\_21 Demolition Landscape Rear Garden, P\_20 Proposed Landscape Rear Garden

## 05

### Appraisal

#### 05.01

##### AMENITY / SCREENING BY TREES AND SHRUBS

No trees on or adjacent to the site are of any significant general public amenity value, as they are not visible from any truly public viewpoint. However, select trees in the rear garden of No. 16 and adjoining are of considerable strictly local amenity value to owners / users of the site, and to those of adjoining properties.

#### 05.02

##### TREES AND LAYOUT - POTENTIAL FOR CONFLICT WITH ROOTS

(Details appear in the tree detail table appended.) The figures in columns 5 and 6 in the Tree data table appended indicate the root protection area ('RPA' below), and typically the basic exclusion fence position. New materials and methods have been developed and continue to be developed that assist in promoting the successful retention of trees in association with constructed features. It should be noted that BS 5837:2012 (section 7.4.2) supports 'up and over' methods of construction where appropriate. The design principle of this method is outlined within Arboricultural Practice Note 12 (Through the Trees to Development, - a revision of APN 1, 1996, published originally by AAIS / Tree Advice Trust). This method has been used for many years on the recommendation of John Cromar's Arboricultural Co. Ltd. and has successfully allowed the retention of mature trees very close to construction activities.

#### 05.03

An assessment as per BS5837:2012 section 4.6.2 has been carried out in connection with the plotting of all RPAs of all trees. (This section requires that site conditions such as location of structures, tree mechanics, etc., are taken into account in determining the likely position of roots.)

#### 05.04

##### ROOTS and DESIGN

SRP is an abbreviation for *static root plate*, (after *Mattheck*, 1991, etc.) a radial dimension derived from trunk diameter based on studies of wind-thrown trees and thus a guide to where structurally significant roots are likely to be located. RPA is an abbreviation used in BS5837:2012 and signifying the *root protection area*. The RPA is a guide to where systemically significant roots are likely to be

located. Minimal surface changes in the RPA of retained trees is entailed. In this case all trees to be retained can be adequately protected by exclusion fencing and arborcentric methods as proposed below to reduce impacts on root systems of retained trees.

**05.05**

**PERCEPTION OF TREES**

The majority of the significantly-sized retained trees are located mainly to the NE of the habited parts of the proposed dwelling.

Trees in relation sited mainly to	Room use on relevant elevation(s)	Comments
NE	Family room, kitchen, dining (GF)	No sunlight shading due to orientation; nearest spread 7m away. Dining room dual-lit.

The proposed (extended) dwelling is in an almost identical position in relation to the trees as is the existing structure : the existing structure’s position in relation to the existing trees has not generated any obvious or reported requirement to prune trees inappropriately.

In view of the above I conclude that shading by and perception of trees has been considered (as sections 5.3.4 and 5.6.2.6 of BS 5837:2012 recommend) and appear not to be negative factors.

**05.06**

Processing by the LPA of any due application from future owners for permission to carry out tree work will no doubt be carried out with due regard for good arboricultural practice and according to British Standard 3998:2010 ‘Tree Work – Recommendations’. In any appeal that might arise against refusal of LPA consent to reduce inappropriately, or fell trees, common arboricultural criteria to those of the LPA would be used by any specialist tree inspectors of the Planning Inspectorate, and thus the trees would in my view be thus protected against inappropriate work. I consider that any such notional issues are very likely to be dealt with appropriately as no doubt in the past they have been within the Borough, as such tree/building juxtapositions are far from rare.

**05.07**

**SUPERSTRUCTURE AND TREE APPRAISAL - TREE PRUNING**

I note from the elevation drawings supplied that no encroachment on the crowns of retained trees will occur.

**05.08**

**TREE REMOVAL APPRAISAL and REPLACEMENT PLANTING**

Please see section 08 for comments on the individual trees proposed for removal. Overall, appropriate replacement tree planting will play some role in providing for future public and local amenity.

The British Geological Survey information for the area indicates that the underlying sub-soil is clay, silt and sand. This places no significant constraint on species selection for tree and other planting. See plan for locations:

A= *Magnolia x loebneri* 'Merrill' 6-8cm girth 25L pot

B= group of Monocotyledons – *Yucca* spp., *Trachycarpus* spp., *Dicksonia* spp.  
25L pots

It is typical for landscaping to be a reserved matter consequent to any grant of consent and for a full landscaping scheme to detail tree, shrub and herbaceous planting etc.

#### 05.09

##### PUBLISHED GUIDANCE IN RELATION TO TREES AND DEVELOPMENT

In conserving trees on development sites, expected best practice is as in B.S. 5837 : 2012. Section 5.1.1 notes :

**“Certain trees are of such importance and sensitivity as to be major constraints on development or to justify its substantial modification : attempts to retain too many or unsuitable trees on a site can result in excessive pressure on the trees during demolition or construction work, or post-completion demands for their removal.”**

#### 05.10

The above advice appears to have been considered in formulating proposals for development.

#### 05.11

##### CONCLUSION

**I conclude that the construction proposed, subject to precautionary measures as outlined above and as per the recommendations outlined below, will not be injurious to trees to be retained, nor will require any trees of significant public amenity value to be removed.**

#### 05.12

##### SUPERVISION

Supervision by and regular communication with an arboriculturist is typically an essential element of site management where trees are present and to be retained. I propose that this takes place at key points in the construction process, and additionally whenever required by the architect or LPA. These key stages are as per **OVERVIEW** below.

#### 05.13

Note to LPA : if the Authority is minded to grant consent, it is invited to consider:

- a) the incorporation of the specific *order of implementation* of the arboricentric methods below into any Conditions applied.
- b) to specify in a Condition that any Construction Management Plan incorporates all the arboricentric methods herein.

Such measures are likely to maximise tree protection.

## OVERVIEW

It is highly important to tree health and vitality that construction activities are carried out strictly in accordance with the tree protection methods specified below. It is widely not understood that a **single** traverse of a root protection area by a mechanical excavator can cause **SIGNIFICANT** and **PERMANENT** (albeit temporarily invisible) damage to trees.

Any such machinery, including, for example, tracked piling rigs, shall be kept at **ALL** times outside the root protection areas (RPAs) as indicated in the Tree data table appended, and/or shall be subject to ARBORICENTRIC METHODS below.

Fences to protect trees shall be respected as **TOTAL EXCLUSION** fences. Hence, before any site activity, **including demolition**, the fence lines shall be complete.

Protective fencing and any temporary protection of ground surfaces will have to be removed in due course to allow finishing of landscaping, paving, etc., but this shall not take place until all need for vehicular access to the site has passed, and shall be agreed with arboriculturist / planners on site during progress of works.

Supervision by an arboriculturist appointed directly by the client (**not the main contractor**) should take place at key points in the construction process, and additionally whenever required by the architect, client, main contractor or LPA. These key stages are :

- 1) At site possession by contractor, outline all tree protection measures with site agent and resolve any issues arising.
- 2) Ensure remedial tree work including is carried out to specification and sign off. Ensure protective fencing is erected and completed as proposed. Ensure any site cabins, mixing sites for mortars, disposal-to-skip sites, etc., are located appropriately, and sign off.
- 3) Supervise laying of temporary ground protection and sign off.
- 4) Attend as required to supervise digging for and the laying of lighting cable ducts or services.
- 5) Approve any removal or adjustment of tree protection and sign off.

# PREPARATION / DEMOLITION

PLEASE READ WITH PLAN REFERENCE 1-38-4811/2/P2, APPENDED.

The Methods shall be implemented **in the order given** unless it is stated to the contrary.

## Method 1 : TREE WORK


Tree work shall be in accordance with the provided specification and good arboricultural practice, and to BS 3998:2010 'Tree Work - Recommendations'.

## Method 2 : TREE PROTECTION FENCING

Tree protection fencing shall be erected, consisting of 'Heras' type fencing (weld-mesh panels), each section securely attached to uprights driven at least 0.6m into ground, as per the layout as shown on the plan (pink lines). No ground levels reduction or excavation shall take place within (=the tree side of) the fence lines. The standard rubber supports ('elephant's feet') shall if used, be as per BS 5837:2012 section 6, figure

3, left; that is, pinned to the substrate with re-bar.

Figure 3 Examples of above-ground stabilizing systems

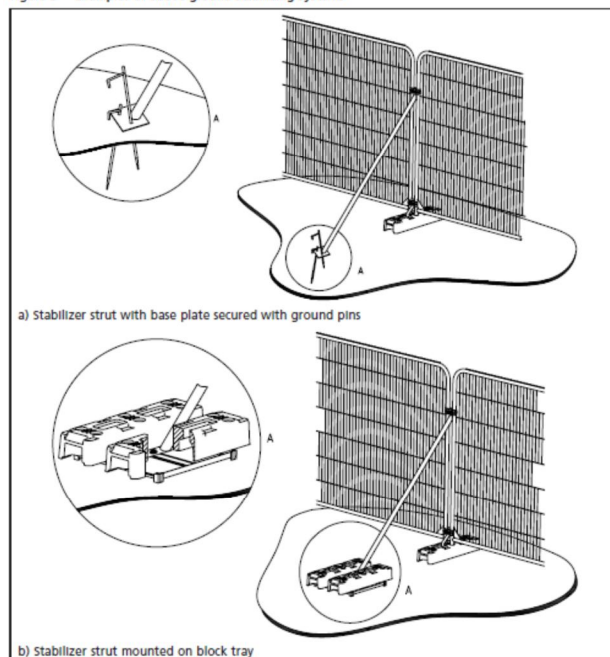

Below the crowns of trees with branches extending to less than 2m above ground level, in order to avoid unnecessary pruning, it is permissible to replace sections with manufactured boards at least 11mm thick (hoarding), attached securely to timber uprights driven at least 0.6m into the ground, providing the finished fence stands at least 1.5m above ground level. Where required to infill odd sections, tree protection fencing may be varied to >1.8m high hoarding of >11mm thick manufactured board and timber uprights >50mm x 100mm, no

part of any of which is to be attached to any tree.

No fires shall be made on any part of the site, or within 20m of any tree to be retained. No storage of materials shall be made within the protective fences. No breaching or moving of the protective fences shall take place without the approval of an arboriculturist.



### Method 3 : GROUND SURFACE HANDLING and PROTECTION

This method shall apply in the zone hatched **blue** on plan. NO levels reduction shall take place. This includes no 'scraping up' with a mechanical excavator or otherwise. Any existing hard surfacing, any existing surface debris, light vegetation, etc., that lies within the zone shall be removed using hand tools only. A 2D geotextile membrane, such as 'Ekotex' shall be laid; 100mm of green-source woodchip; continuously abutted scaffold boards or manufactured boards so as to completely cover this area. This area shall be used for pedestrian access only.

OR

If loads exceed that of pedestrians, a 2D geotextile membrane, such as 'Ekotex' shall be laid; 150mm of green-source woodchip; continuously abutted scaffold boards and a layer of manufactured board at least 25mm thick screwed to the underlying scaffold board so as to completely cover this area. This area may be used for pedestrian-operated plant up to 2 tonnes in weight.

OR

If loads exceed 2 tonnes the ground surface shall be covered (in sequence) by a 2D geotextile membrane, such as 'Ekotex' ; 100mm of green-source woodchip ; TuffTrak<sup>R</sup> Euromat ground guards or similar **appropriate temporary trackway sections. The temporary trackways shall be fixed together with manufacturers' approved fixings.** On completion of build phase the ground guards shall be lifted by hand or by plant standing outside the zone.

Any scaffold erection shall take its bearing directly off the ground surface via spreader plates/scaffold boards.

### Method 4 : SERVICE TRENCHES

N.B. -This applies to ALL services : Electricity, gas, water, etc. Existing services shall be utilised wherever possible.

These methods shall apply generally within any RPA (**orange** circles).

1) The trench shall be opened with an air-spade to required depth. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of trench is dug. Services shall be worked under/over/around/ between roots so as not to cut or damage any larger than 20mm diameter.

OR

2) The trench shall be dug with hand tools only. Probes such as screwdrivers or steel rod <10mm diameter to determine root presence ahead of digging shall be used. The work shall proceed cautiously. No roots over 20mm diameter shall be cut. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of trench is dug. Services shall be worked under/over/around/ between roots so as not to cut or damage any larger than 20mm diameter.

OR



3) Services shall be thrust-bored using trenchless techniques (compressed air-driven 'mole') at a depth of 700mm or more below ground level, entailing no surface excavation. Starter pits for rams shall be outside any RPA, or reception/starter pits shall be opened according to 1) or 2) above.

## LATE CONSTRUCTION PHASE

### Method 5 : STEP CONSTRUCTION

This method shall apply in zone of **cyan fill** on plan. The excavation shall be made with hand tools only. Any roots encountered shall be trimmed to the edge of excavation using a sharp edge tool such as handsaw or secateurs; the cuts shall be made at right angles to the long axis of the root, and in accordance with BS3998:2010, 8.6. An HDPE membrane shall be placed between any root-bearing soil and any wet concrete to be poured. Impermeable sheeting (to exclude wet concrete) shall be laid and secured locally by temporary weighting / taping as required. Concrete casting shall take place without disturbing this protective layer.

### Method 6 : PLANTER EDGING

This method shall apply in zone of **brown fill**. Edge restraint shall be formed from timber baulks (e.g. modern railway sleepers) or lighter section tanalised timber pegged or pinned to substrate with 25mm dia. re-bar or similar.

### Method 7 : REAR PATIO and STEPS

This method shall apply in zone hatched **green** on plan. No reduction of levels shall take place. No wheeled or tracked machinery shall be used : construction shall be by means of hand tools. NO reduction in existing ground levels shall take place – no 'scraping up' with or without a mechanical excavator. Risers shall be constructed from elements such as tanalised timber or stone set above existing ground level.

### SLABS

A 2D geotextile such as 'Ekotex', shall be laid directly on the ground surface. Levels can be corrected by use of granite chippings NO FINES. Paving shall be laid open-jointed and the joints rammed with granite chippings.

OR

### LOOSE STONE / SLATE / GRAVEL

A 2D geotextile such as 'Ekotex', shall be laid directly on the ground surface. A dressing of dry loose stone or gravel shall be laid to depth as required.

OR

## **FLEXIBLE FORMATION**

A 2D geotextile such as 'Ekotex' shall be laid to entirely cover the base area, then clean crushed hard stone / angular ballast (typically sold as 'track ballast' - not limestone) 20mm-40mm NO FINES, to 60mm depth. Over this, a separating layer of non-woven geotextile such as 'Ekotex' shall be laid, followed by a wearing course of KBI Flexi-Pave HD (porous finish) nominal thickness 25mm-50mm which shall be applied by specialist contractor over the prepared substrate. Any edge restraint shall be formed of tanalised timber pegged or pinned – e.g. with re-bar - to the substrate. The re-bar shall be driven below the upper face of the timber and the hole sealed with a hardwood peg and glued and trimmed flush. If edge restraints are required to be flush with adjacent ground levels, topsoil shall be loose-tipped and graded by hand to slope to existing levels.

### **Method 8 : GARDEN SHED**

This method shall apply in the zone of **yellow fill** on plan. Edge restraint shall be formed from timber baulks (e.g. modern railway sleepers) or lighter section tanalised timber pegged or pinned to substrate with 25mm dia. re-bar or similar. A geogrid such as Tensar 'TriAx' shall be laid directly on the ground surface within the timber edges, then a sub-base 75mm deep of 20-40mm clean stone -NO FINES- (typically sold as 'track ballast'), then a 2D geotextile such as 'Ekotex'. A coarse shingle layer can be placed directly over this, or for a slab finish, a blinding of lime-free bedding sand or granite chippings may be laid to correct levels, then the slabs. The slabs shall not be bedded on mortar or lean mix.

The enclosure shall be of timber and uprights. Post holes shall be dug with hand tools only. Probes such as screwdrivers or steel rod <10mm diameter to determine root presence ahead of digging shall be used. The work shall proceed cautiously. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of hole is dug. It should be borne in mind that the presence of large numbers of roots >20mm in diameter may effectively prevent the completion of the post hole, and typically shall require terminating the dig and moving the post hole to a different location.

The timber superstructure may be placed directly on and affixed to the timber edging or may alternatively be attached to posts placed according to the method outlined.

### **Method 9 : SOIL BUILD-UP**

This method shall apply in the zone of **brown crosses** zone. Soil delivery shall be overhand : no mechanical plant shall over-run the loose-tipped material. The soil mix shall be biochar ( such as <https://www.soilfixer.co.uk/biochar-article> ) mixed with topsoil (to BS3882 : 2015 topsoil) - 5% by volume (equating to 20 kgs of product per cubic metre of topsoil). All growing medium handling shall take place only after a minimum of 3 days after heavy rain, and shall where possible be carried out 7 days or more after such rainfall. The mix shall

be laid to finish to required levels and allowed to settle via mist irrigation / watering-in / natural rainfall. Earthworm inoculation units shall be placed 150mm below ground level at 5m intervals.

#### **Method 10 : GROUND PREPARATION FOR TREE PLANTING AREAS**

This method shall apply after completion of main build only. Ground preparation for tree planting areas (stepped landscaped zone) shall entail backfilling with screened topsoil (to BS3882 : 2015 topsoil) with biochar ( such as <https://www.soilfixer.co.uk/biochar-article> ) - 5% of the topsoil volume. This equates to about 20 kgs of product per cubic metre of topsoil (to BS3882 : 2015 topsoil) to a maximum depth of 0.45m within 1.3m of the trunk location of each tree to be planted. Soil handling of any kind shall take place only after a minimum of 3 days after heavy rain, and shall where possible be carried out 7 days or more after such rainfall. Tree planting shall be in accordance with British Standard 8545:2014 'Trees : from nursery to independence in the landscape - Recommendations'. This enshrines good arboricultural practice: the tree shall be planted so that the root collar lies at finished ground level, shall be short-staked and tied with proprietary tree tie. Any shrubs shall similarly be planted so that the root collar lies at finished ground level, and shall be protected with proprietary growing tube (staked). The ground surface shall be mulched within 0.75m of the trunk location to a depth of 100mm with composted organic material.

#### **Method 11 : MAINTENANCE**

Maintenance shall consist of the regular moderate watering of any plant the subject of the planting proposal during the first season (April 15 to October 15) after planting and thereafter in the following four years if drought conditions occur. Mulch shall be kept topped up to a maximum depth of 100mm. Grassed areas shall be cut weekly (April 15 to October 15).

#### **Method 12 : REPLACEMENT**

If within five years of issue of certificate of completion any plant the subject of the planting proposal dies or in the opinion of the LPA becomes seriously damaged or diseased, the same shall be replaced according to the above methods.

(All design subject to engineering approval, but used on other sites and known to be practicable and reliable).

07

General

If conflicts between any part of a tree and the building(s) arise in the course of development these can often be resolved quickly and at little cost if a qualified arboriculturist is consulted promptly. Lack of such care is often apparent quickly and decline and death of such trees can spoil design aims and can of course affect saleability, and reflect poorly on the construction and design personnel involved. Trees that have been the recipients of careful handling during construction add considerably to the appeal and value of the finished development.

---

Date: 2<sup>nd</sup> July 2019

Signed:

A handwritten signature in black ink, appearing to read 'John Cromar', with a long, sweeping horizontal flourish extending to the right.

John C. M. Cromar, Dip.Arb.(RFS) F.Arbor A.

01582 808020 / 07860 453072

## APPENDICES

08

### Tree Data

Tree number	Tree type	Height	Height to lowest branch	Stem diameters	Radius of RPA if circle (mm)	RPA (m <sup>2</sup> )	Comments	Life expectancy (years)	Assessed BS5837 value category
1	Monterey pine	17	2.0	538	6456	130.9	Potential for street views	40+	B1
2	common lime	17	5.0	750	9000	254.5	Useful contribution to screen.	40+	B1
3	common lime	18	5.0	488	5856	107.7	Useful contribution to screen.	40+	B1
4	<i>Magnolia</i> spp.	4		150, 140, 140	2980	27.9	Locally ornamental	20+	C1
G5	group	3		<200	2400	18.1	Monocotyledon theme. Three shrubs in raised sleeper bed.	10+	C2

In all cases, in the absence of negative comment on vitality and structure, normal systemic and physiological condition should be considered to apply.

Dependent on time of year of survey, deciduous trees may not have been in leaf at the time of inspection. This may have limited precise identification.

Schedule***Trees at 16 Bracknell Gardens, London, NW3 7EB***

Please read in conjunction with plan 1-38-4811/2/P2. Trees outside the curtilage of the property are included. Boundaries where marked should always be treated as notional, and no statement either implied or explicit as to the ownership of trees should be taken as definitive or precise. As applicable, the consent to, or acquiescence to, and communication of the timing of the recommended remedial works, as far as the relevant owner is concerned, should be checked before any such trees are actually treated.

Tree number	Tree type	Height	Height to lowest branch	Stem diameters	Comments
2	common lime	17	5.0	750	Crown clean in sector overhanging site
3	common lime	18	5.0	488	
4	<i>Magnolia</i> spp.	4		150, 140, 140	Remove including stumps
G5	group	3		<200	

## NOTES:

This schedule notifies the LPA, where such notification is required, of intention to prune or remove trees in accordance with TCP Act 1990 Section 211. 42 days after notification should be allowed before proceeding with the work, during which time (and after) the LPA may place a Tree Preservation Order on the tree(s), thus requiring a formal application for any works to living wood.

All tree work should be carried out to BS 3998 : 2010 'Tree Work - Recommendations'. The Wildlife and Countryside Act 1981 protects with certain exceptions all birds and their nests. It is an offence to destroy such nests or take or injure such birds in the course of tree works operations. If a tree is a bat-roost, a licence to work on the tree must first be obtained from the relevant Statutory Nature Conservation Organization (in England : Natural England 0845 601 4523.) Acting without a licence is likely to be justifiable only in acute emergencies threatening human life and where all other legally available option such as footpath diversion, fencing and warning signs cannot be applied.

'Crown cleaning' – an umbrella term now covered by several separate sections in BS3998:2010 - should be understood to mean : removal of foreign objects (section 7.13) ; removal of ivy to the extent needed to facilitate inspection (section 7.12), typically trimming back (e.g. with a hedge cutter or secateurs) to near the line of the trunk or branches, and/or removing selected stems so that the structure of the tree can be seen sufficiently. Dead wood can be an important ecological feature. Treatment of dead wood under 'crown cleaning' shall mean (section 7.3.2) shorten and retain if safe to do so, thus retaining some resource for invertebrates, etc.


10

Plans

1-38-4811/2/P1 v1

1-38-4811/2/P2 v1



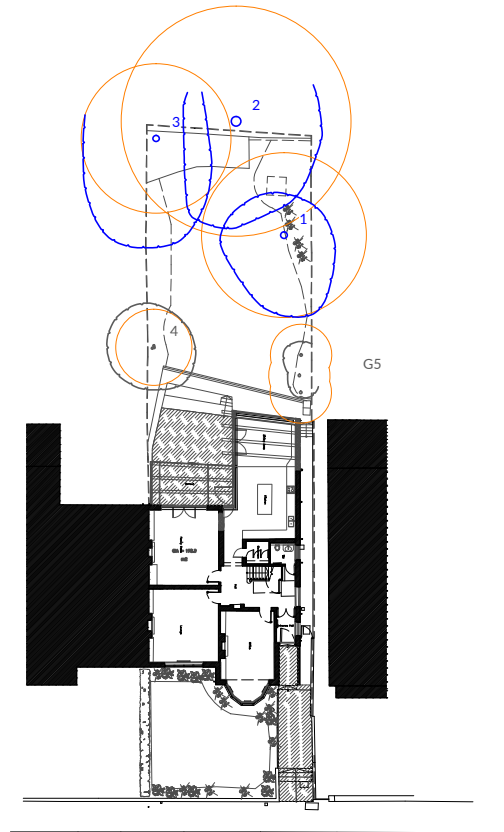

**JOHN CROMAR'S  
ARBORICULTURAL  
COMPANY  
LIMITED**

THE OLD SCHOOL,  
TITLEY, KINGTON,  
HR5 3RN,  
at Wheatley, Oxford  
& Harpenden, Herts.

TEL 01582 808020  
FAX 01544 231006  
MOB 07860 453072  
admin@treescan.co.uk  
www.treescan.co.uk



**KEY TO COLOURS/LINETYPES  
USED IN RELATION TO TREES**

- GREEN - High Value
- BLUE - Moderate Value
- BLACK - Low Value
- RED - Remove/Very short life expectancy
- ORANGE SHAPES - Root Protection Areas

TOOTHED LINE: Tree spread line

**NOTES**  
Do not use for setting out purposes.  
All dimensions to be checked on site.

**DRG. NAME**  
TREE VALUE ASSESSMENT AS PER  
BS 5837:2012 & ROOT PROTECTION  
AREAS

**TEXT**  
FOR FULL DETAILS OF TREE VALUE  
PLEASE SEE REPORT

**BASED ON**  
Marek Wojciechowski Architects Ltd.  
DRG. NO.: D\_21 Demolition Landscape  
Rear Garden SUPPLIED

**SITE ADDRESS**  
16 Bracknell Gardens, London, NW3  
7EB

**DRG. REF.**  
138-4811/2/P1v1

**SCALE & SIZE**      **DATE**  
1:200 @ A1      2-Jul-19

0      5      10

## PREPARATION / DEMOLITION

### Method 1 : TREE WORK

Tree work shall be in accordance with the provided specification and good arboricultural practice, and to BS 3998:2010 'Tree Work - Recommendations'.

### Method 2 : TREE PROTECTION FENCING

Tree protection fencing shall be erected, consisting of 'Heras' type fencing (weld-mesh panels), each section securely attached to uprights driven at least 0.6m into ground, as per the layout as shown on the plan (pink lines). No ground levels reduction or excavation shall take place within (=the tree side of) the fence lines. The standard rubber supports ('elephant's feet') shall if used, be as per BS 5837:2012 section 6, figure 3, left; that is, pinned to the substrate with re-bar.

Below the crowns of trees with branches extending to less than 2m above ground level, in order to avoid unnecessary pruning, it is permissible to replace sections with manufactured boards at least 11mm thick (hoarding), attached securely to timber uprights driven at least 0.6m into the ground, providing the finished fence stands at least 1.5m above ground level. Where required to infill odd sections, tree protection fencing may be varied to >1.8m high hoarding of >11mm thick manufactured board and timber uprights >50mm x 100mm, no part of any of which is to be attached to any tree.

No fires shall be made on any part of the site, or within 20m of any tree to be retained. No storage of materials shall be made within the protective fences. No breaching or moving of the protective fences shall take place without the approval of an arboriculturist.

### Method 3 : GROUND SURFACE HANDLING and PROTECTION

This method shall apply in the zone hatched blue on plan. No levels reduction shall take place. This includes no 'scraping up' with a mechanical excavator or otherwise. Any existing hard surfacing, any existing surface debris, light vegetation, etc., that lies within the zone shall be removed using hand tools only. A 2D geotextile membrane, such as 'Ekotex' shall be laid; 100mm of green-source woodchip; continuously abutted scaffold boards or manufactured boards so as to completely cover this area. This area shall be used for pedestrian access only.

OR

If loads exceed that of pedestrians, a 2D geotextile membrane, such as 'Ekotex' shall be laid; 150mm of green-source woodchip; continuously abutted scaffold boards and a layer of manufactured board at least 25mm thick screwed to the underlying scaffold board so as to completely cover this area. This area may be used for pedestrian-operated plant up to 2 tonnes in weight.

OR

If loads exceed 2 tonnes the ground surface shall be covered (in sequence) by a 2D geotextile membrane, such as 'Ekotex'; 100mm of green-source woodchip; TuffTrakR Euromat ground guards or similar appropriate temporary trackway sections. The temporary trackways shall be fixed together with manufacturers' approved fixings. On completion of build phase the ground guards shall be lifted by hand or by plant standing outside the zone.

Any scaffold erection shall take its bearing directly off the ground surface via spreader plates/scaffold boards.

### Method 4 : SERVICE TRENCHES

N.B. -This applies to ALL SERVICES : Electricity, gas, water, etc. Existing services shall be utilised wherever possible.

These methods shall apply generally within any RPA (orange circles).

1) The trench shall be opened with an air-spade to required depth. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of trench is dug. Services shall be worked under/over/around/ between roots so as not to cut or damage any larger than 20mm diameter.

OR

2) The trench shall be dug with hand tools only. Probes such as screwdrivers or steel rod <10mm diameter to determine root presence ahead of digging shall be used. The work shall proceed cautiously. No roots over 20mm diameter shall be cut. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of trench is dug. Services shall be worked under/over/around/ between roots so as not to cut or damage any larger than 20mm diameter.

OR

3) Services shall be thrust-bored using trenchless techniques (compressed air-driven 'mole') at a depth of 700mm or more below ground level, entailing no surface excavation. Starter pits for roots shall be outside any RPA, or reception/starter pits shall be opened according to 1) or 2) above.

## LATE CONSTRUCTION PHASE

### Method 5 : STEP CONSTRUCTION

This method shall apply in zone of cyan fill on plan. The excavation shall be made with hand tools only. Any roots encountered shall be trimmed to the edge of excavation using a sharp edge tool such as handsaw or secateurs; the cuts shall be made at right angles to the long axis of the root, and in accordance with BS3998:2010, 8.6. An HDPE membrane shall be placed between any root-bearing soil and any wet concrete to be poured. Impermeable sheeting (to exclude wet concrete) shall be laid and secured locally by temporary weighting / taping as required. Concrete casting shall take place without disturbing this protective layer.

### Method 6 : PLANTER EDGING

This method shall apply in zone of brown fill. Edge restraint shall be formed from timber baulks (e.g. modern railway sleepers) or lighter section tanalised timber pegged or pinned to substrate with 25mm dia. re-bar or similar.

### Method 7 : REAR PATIO and STEPS

This method shall apply in zone hatched green on plan. No reduction of levels shall take place. No wheeled or tracked machinery shall be used : construction shall be by means of hand tools. NO reduction in existing ground levels shall take place - no 'scraping up' with or without a mechanical excavator. Risers shall be constructed from elements such as tanalised timber or stone set above existing ground level.

### SLABS

A 2D geotextile such as 'Ekotex', shall be laid directly on the ground surface. Levels can be corrected by use of granite chippings NO FINES. Paving shall be laid open-jointed and the joints rammed with granite chippings.

OR

### LOOSE STONE / SLATE / GRAVEL

A 2D geotextile such as 'Ekotex', shall be laid directly on the ground surface. A dressing of dry loose stone or gravel shall be laid to depth as required.

OR

### FLEXIBLE FORMATION

A 2D geotextile such as 'Ekotex' shall be laid to entirely cover the base area, then clean crushed hard stone / angular ballast (typically sold as 'track ballast' - not limestone) 20mm-40mm NO FINES, to 60mm depth. Over this, a separating layer of non-woven geotextile such as 'Ekotex' shall be laid, followed by a wearing course of KBI Flexi-Pave HD (porous finish) nominal thickness 25mm-50mm which shall be applied by specialist contractor over the prepared substrate. Any edge restraint shall be formed of tanalised timber pegged or pinned - e.g. with re-bar - to the substrate. The re-bar shall be driven below the upper face of the timber and the hole sealed with a hardwood peg and glued and trimmed flush. If edge restraints are required to be flush with adjacent ground levels, topsoil shall be loose-tipped and graded by hand to slope to existing levels.

### Method 8 : GARDEN SHED

This method shall apply in the zone of yellow fill on plan. Edge restraint shall be formed from timber baulks (e.g. modern railway sleepers) or lighter section tanalised timber pegged or pinned to substrate with 25mm dia. re-bar or similar. A geogrid such as Tensar 'TriAx' shall be laid directly on the ground surface within the timber edges, then a sub-base 75mm deep of 20-40mm clean stone -NO FINES- (typically sold as 'track ballast'), then a 2D geotextile such as 'Ekotex'. A coarse shingle layer can be placed directly over this, or for a slab finish, a binding of lime-free bedding sand or granite chippings may be laid to correct levels, then the slabs. The slabs shall not be bedded on mortar or lean mix.

The enclosure shall be of timber and uprights. Post holes shall be dug with hand tools only. Probes such as screwdrivers or steel rod <10mm diameter to determine root presence ahead of digging shall be used. The work shall proceed cautiously. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of hole is dug. It should be borne in mind that the presence of large numbers of roots >20mm in diameter may effectively prevent the completion of the post hole, and typically shall require terminating the dig and moving the post hole to a different location.

The timber superstructure may be placed directly on and affixed to the timber edging or may alternatively be attached to posts placed according to the method outlined.

### Method 9 : SOIL BUILD-UP

This method shall apply in the zone of brown crosses zone. Soil delivery shall be overhand : no mechanical plant shall over-run the loose-tipped material. The soil mix shall be biochar (such as <https://www.soilfixer.co.uk/biochar-articla>) mixed with topsoil (to BS3882 : 2015 topsoil) - 5% by volume (equating to 20 kgs of product per cubic metre of topsoil). All growing medium handling shall take place only after a minimum of 3 days after heavy rain, and shall where possible be carried out 7 days or more after such rainfall. The mix shall be laid to finish to required levels and allowed to settle via mist irrigation / watering-in / natural rainfall. Earthworm inoculation units shall be placed 150mm below ground level at 5m intervals.

### Method 10 : GROUND PREPARATION FOR TREE PLANTING AREAS

This method shall apply after completion of main build only. Ground preparation for tree planting areas (stepped landscaped zone) shall entail backfilling with screened topsoil (to BS3882 : 2015 topsoil) with biochar (such as <https://www.soilfixer.co.uk/biochar-articla>) - 5% of the topsoil volume. This equates to about 20 kgs of product per cubic metre of topsoil (to BS3882 : 2015 topsoil) to a maximum depth of 0.45m within 1.3m of the trunk location of each tree to be planted. Soil handling of any kind shall take place only after a minimum of 3 days after heavy rain, and shall where possible be carried out 7 days or more after such rainfall. Tree planting shall be in accordance with British Standard BS45:2014 'Trees : from nursery to independence in the landscape - Recommendations'. This ensures good arboricultural practice: the tree shall be planted so that the root collar lies at finished ground level, shall be short-staked and tied with proprietary tree tie. Any shrubs shall similarly be planted so that the root collar lies at finished ground level, and shall be protected with proprietary growing tube (staked). The ground surface shall be mulched within 0.75m of the trunk location to a depth of 100mm with composted organic material.


### Method 11 : MAINTENANCE

Maintenance shall consist of the regular moderate watering of any plant the subject of the planting proposal during the first season (April 15 to October 15) after planting and thereafter in the following four years if drought conditions occur. Mulch shall be kept topped up to a maximum depth of 100mm. Grassed areas shall be cut weekly (April 15 to October 15).

### Method 12 : REPLACEMENT

If within five years of issue of certificate of completion any plant the subject of the planting proposal dies or in the opinion of the LPA becomes seriously damaged or diseased, the same shall be replaced according to the above methods.

(All design subject to engineering approval, but used on other sites and known to be practicable and reliable).

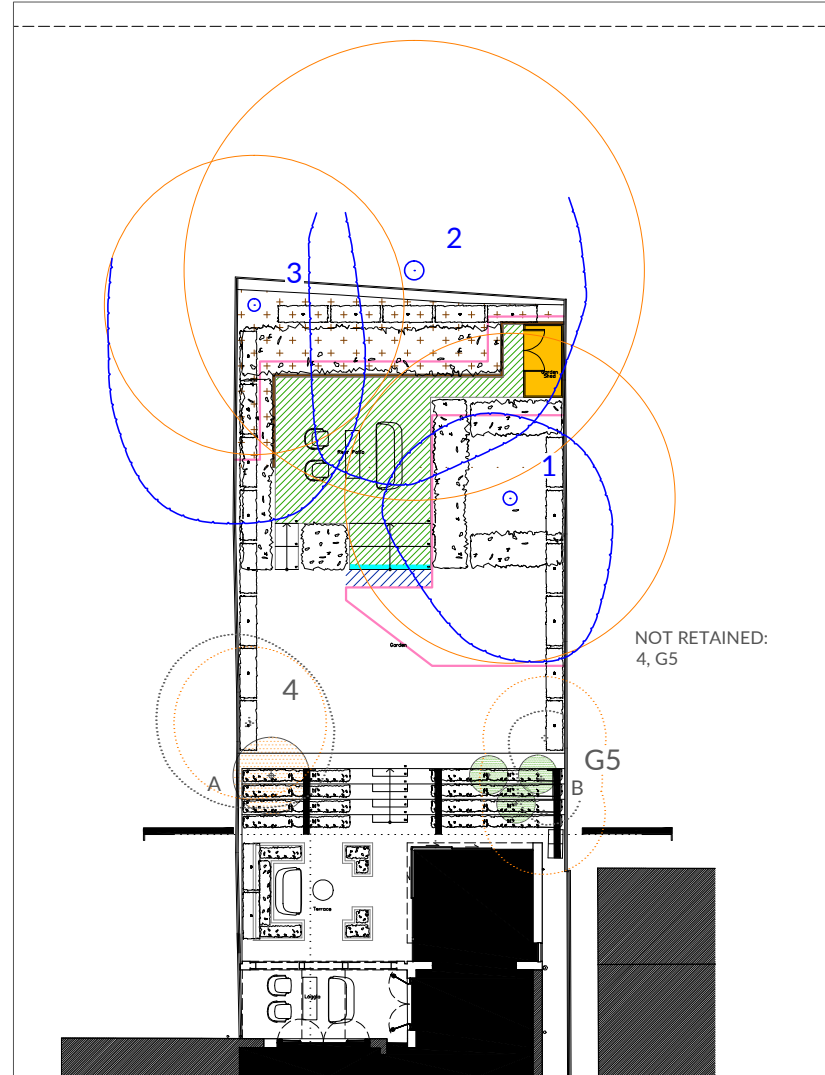

**JOHN CROMAR'S  
ARBORICULTURAL  
COMPANY  
LIMITED**

THE OLD SCHOOL,  
TITLEY, KINGTON,  
HR5 3RN,  
at Wheatley, Oxford  
& Harpenden, Herts.

TEL 01582 808020  
FAX 01544 231006  
MOB 07860 453072  
[admin@treescan.co.uk](mailto:admin@treescan.co.uk)  
[www.treescan.co.uk](http://www.treescan.co.uk)



NOTES  
Do not use for setting out purposes.  
All dimensions to be checked on site.

DRG. NAME  
TREE RETENTION & TREE  
PROTECTION MEASURES

TEXT  
FOR FULL METHOD DETAILS  
PLEASE SEE REPORT

BASED ON  
Marek Wojciechowski Architects Ltd.  
DRG. NO.: P\_20 Proposed Landscape  
Rear Garden SUPPLIED  
SITE ADDRESS  
16 Bracknell Gardens, London, NW3  
7EB

DRG. REF.  
1:38-4811/2/P2/v1  
SCALE & SIZE  
1:100 @ A1  
DATE  
2-Jul-19  
0 5