

NOTES:

LEGEND			
	Exposed pipework to lower ground floor ceiling		
	Pipework from/to existing & new risers within floor void		
	Electrical cabling from/to existing & new risers within floor void		
	Existing riser/opening in floor to be retained or stripped-out - refer to detailed notes on drawing		
	New riser/opening in floor		
	Floor mounted VRF unit within bespoke joinery housing. For VRF sizes refer to drawing RS_5_J_61		
	Existing joists within floor		
[]	Existing beams within floor		
	Layout of existing walls to be removed		
ER	Electrical riser.		
MR	Mechanical riser.		
Note: Beam and joist locations are assumed and are to be confirmed			

ivole: Beam and joist locations are assumed and are to be confirmed with an on site survey prior to construction.

The drawing is to be read in conjunction with PRS Heritage Significance drawings (HW-series drawings); Alan Baxter structural drawings and Frankham services drawings.


The services distribution strategy is to avoid altering the existing fabric by re-using existing services routes and notches where possible. Elsewhere the integration of new services will aim to work with the grain of the existing structure by passing services between existing timber floor joists and with careful coordination of the routes to limit notching to existing joists.


Where new notches are required these will be agreed by the LB Camden Conservation Officer.

All horizontal distribution of pipework to not be larger than 13mm in diameter. No insulation to run through floor timber structure. Pipework dimensions are as follows:

1.No 24mm ø pipe including insulation (6.5 ø RF pipe to VRF) 1.No 31mm ø pipe including insulation (13 ø RF pipe to VRF)

All redundant services openings will be made good.

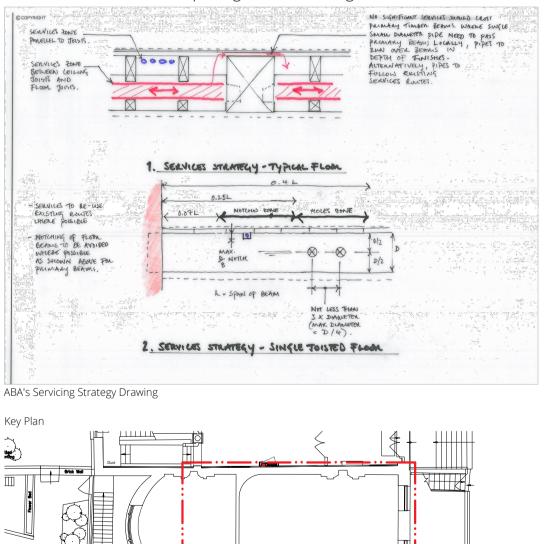

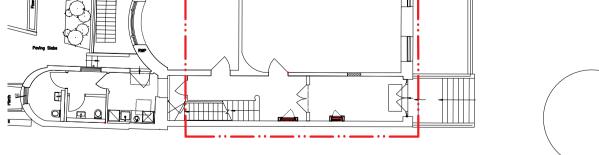

FOR PLANNING

Project Ref:	42-43 RUSSELL SQUARE		
Subject :	GROUND FLOOR PLAN: 43RS PROPOSED SERVICES RISER		
Drwg No :	42-43 RS_20_Y_01.02	Rev :	В
Scale :	1:20	Original sheet size:	A1