



KEYPLAN

NOTES

- THE INTRUDER ALARM SYSTEM SHALL BE WIRED IN MULTICORE SECURITY SYSTEM CABLING BY THE ELECTRICAL CONTRACTOR. TAMPER PROOF PROTECTION IS TO BE PROVIDED TO ALL CIRCUITS & DEVICES.
- THE SYSTEM IS TO BE INSTALLED, TESTED & COMMISSIONED & CERTIFIED IN FULL COMPLIANCE WITH BS EN 50136-1:2012.
- THE ELECTRICAL CONTRACTOR SHALL EMPLOY THE SERVICES OF A REGISTERED ALARM INSTALLER.
- THE POWER SUPPLY FOR THE INTRUDER ALARM SYSTEM SHALL BE COMPLETELY DEDICATED WITH THE MAIN DISCONNECTION DEVICE SECURED FROM UNAUTHORISED OPERATION.
- ALL CABLING ASSOCIATED WITH CCTV SYSTEM TO BE CARRIED OUT BY THE ELECTRICAL CONTRACTOR UNDER THE INSTRUCTION OF THE SPECIALIST SECURITY CONTRACTOR.

DOOR INTERCOM / DOOR ACCESS SYSTEM

- INTERCOM CALL STATION STATION. IP65 RATED & VANDAL RESISTANT
- WALL MOUNTED VIDEO PHONE HANDSET C/W DOOR RELEASE FUNCTION AND INDUCTIVE AUDIO COUPLER.
- GREEN BREAK GLASS UNIT FOR EMERGENCY RELEASE.
- DOOR ACCESS REQUEST TO EXIT BUTTON (STAINLESS STEEL FINISH)
- TRANSMAGNETIC DOOR LOCKS C/W INTEGRAL INTRUDER ALARM CONTACTS.
- ACD CARD READER
- POWER SUPPLY UNIT
- INTRUDER ALARM PANEL.
- CCTV - FIXED CCTV CAMERA C/W VANDAL PROOF HOUSING.
- INTERNAL INTRUDER ALARM SOUNDER (SOUND BOMB TYPE).
- INTRUDER ALARM REMOTE KEYPAD AT 1350mm AFFL.

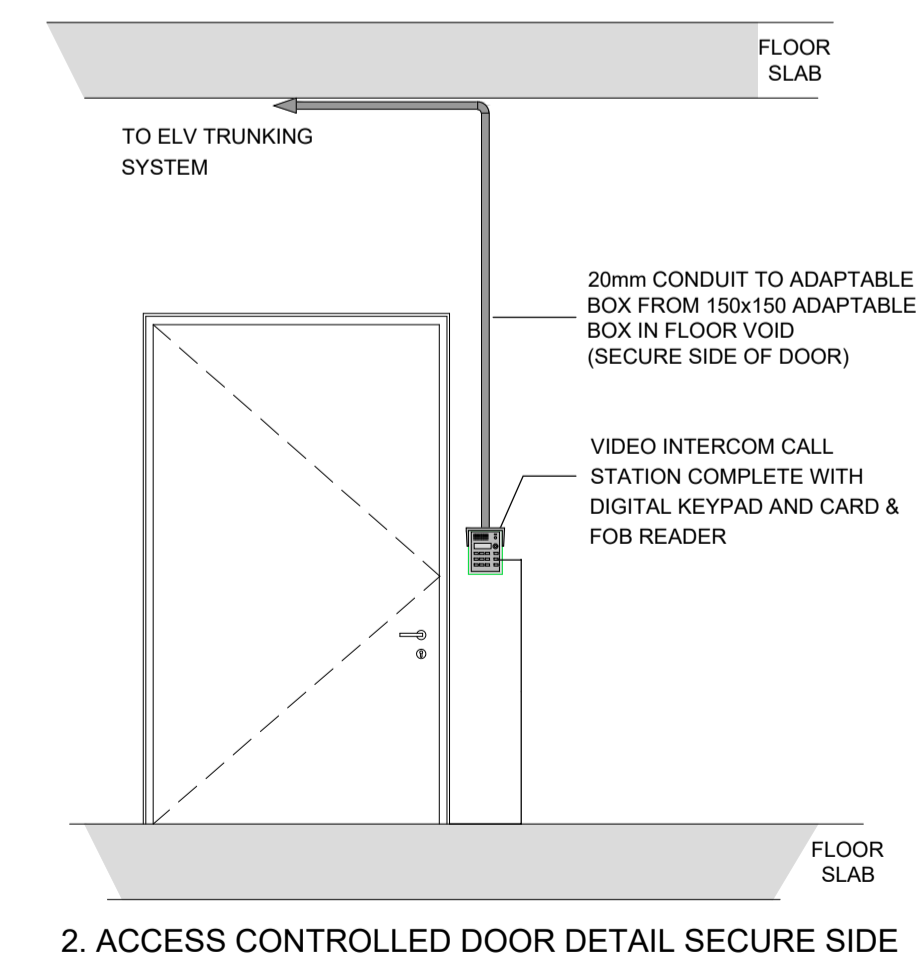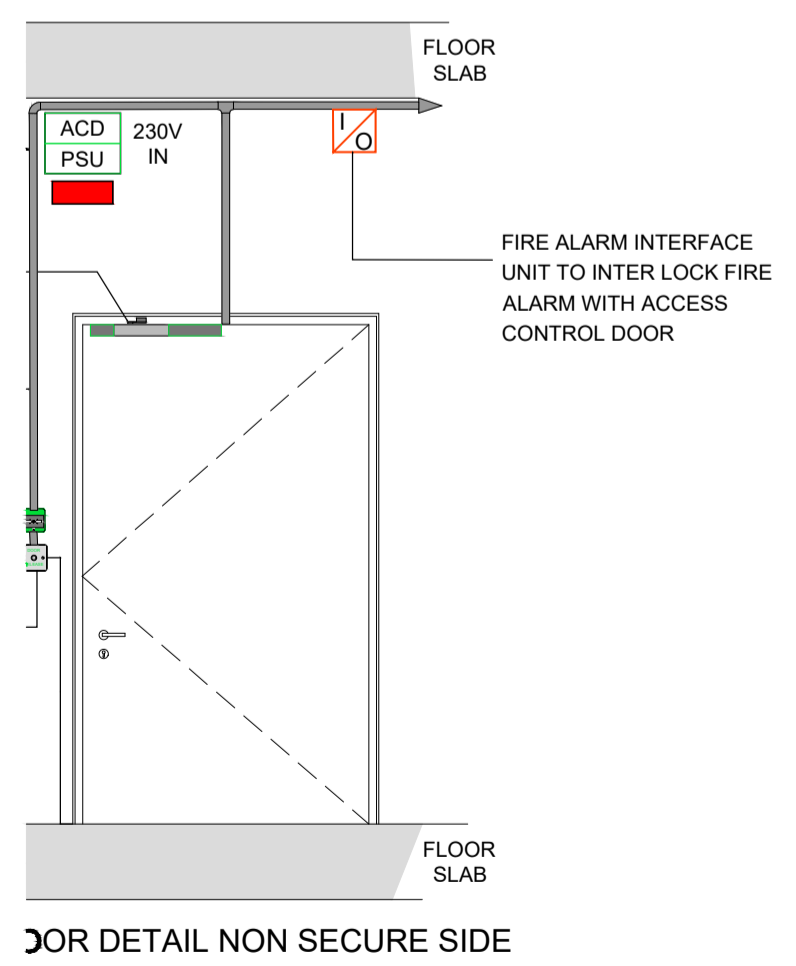

NOTE: ARCHITECTURAL DRAWING USED FOR COMPILATION OF IN2 DRAWING. ARCHITECTURAL DRAWING REVISION: DATE RECEIVED: 14.06.2019

STATUS	DATE	DESCRIPTION	DRN	ENG	APP	REV
S4	17.09.2019	CONSTRUCTION ISSUE	JDT	MS	BF	C3
S4	18.06.2019	CONSTRUCTION ISSUE	JDT	TH	BF	C2
S4	18.10.2018	CONSTRUCTION ISSUE	KO	TH	BF	C1

IN2
ENGINEERING DESIGN PARTNERSHIP
DUBLIN . ATHLONE . BELFAST . LONDON

PROJECT
BELSIZE PARK FIRESTATION

CLIENT
PLATINUM LAND

DRAWING TITLE
**ELECTRICAL SERVICES INSTALLATION
GROUND FLOOR LEVEL
SECURITY & ACCESS CONTROL SERVICES LAYOUT**

SCALE
1:100 @ A1
1:200 @ A3

PROJECT REF:
L18051

DRAWING No.
L18051-IN2-00-00-DR-E-8001

STATUS
S4

REVISION
C3