


40-41 Mill Lane, West Hampstead, London, NW6 1NR

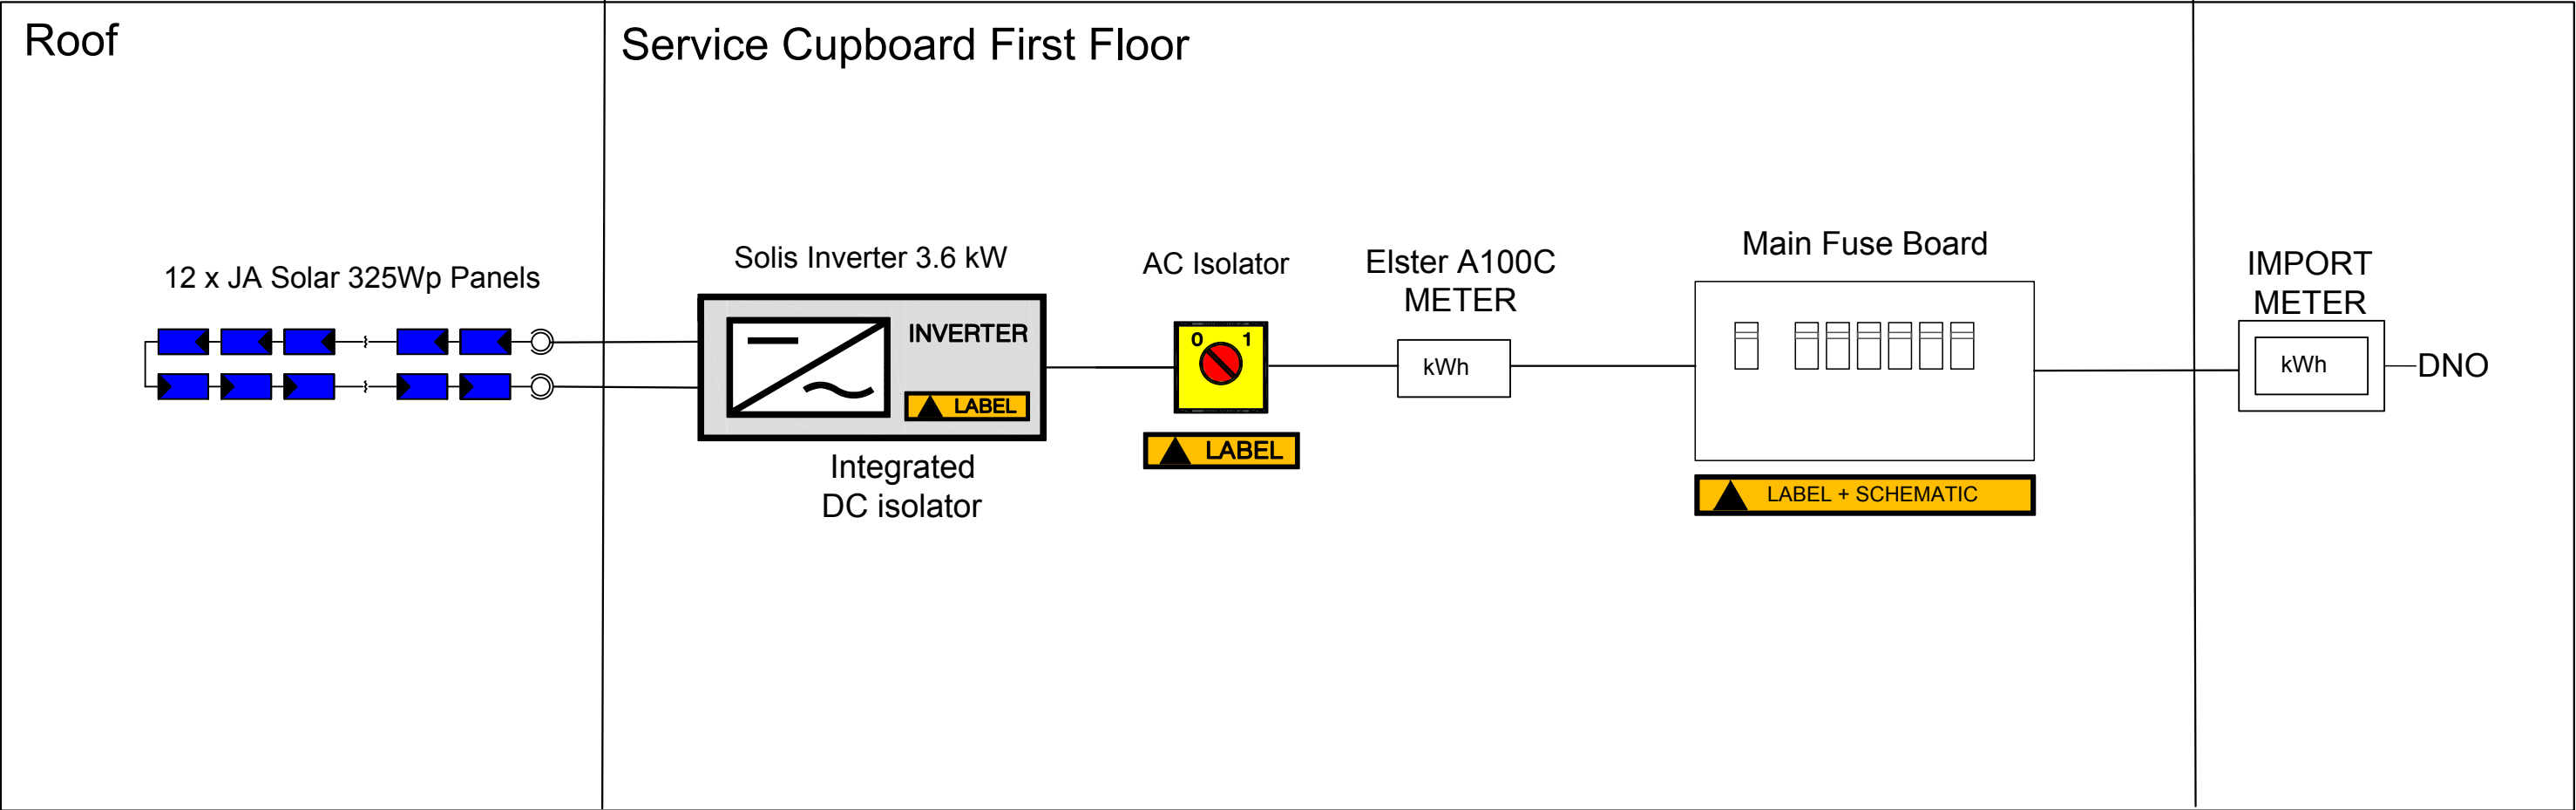

START UP SEQUENCE

1. Ensure that the DC is on;
2. Turn on the MCB on the consumer unit and the AC isolator;
3. After about 3 minutes a continuous green light on the inverter indicates all is ok.

SHUT DOWN SEQUENCE

1. Turn off AC isolator;
2. Turn off DC isolator (only for inverter maintenance).

PROTECTION SETTINGS

Grid voltage (Disconnection value)	Grid frequency (Disconnection value)	Reconnection Time
-10 % / +15 % of the rated voltage (1.5 s)	+/- 1 Hz of the rated frequency (0.5 s)	180 s

JOJU Solar
 39-41 North Road
 London
 N79DP
 0207 679 1000