




The use of this data by the recipient acts as an agreement of the following statements. Do not use this data if you do not agree with any of the following statements:-

All drawings are based upon site information supplied by third parties and as such their accuracy cannot be guaranteed. All features are approximate and subject to clarification by a detailed topographical survey, statutory service enquiries and confirmation of the legal boundaries.


Do not scale the drawing. Use figured dimensions in all cases. Check all dimensions on site.

Report any discrepancies in writing to Palmer Lunn Architects before proceeding.

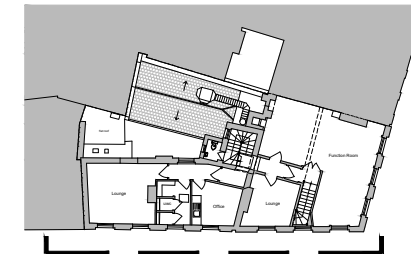

Schedule of Proposed Stripping out Works

- Proposed Stripping out Works
 - 1. All existing services and associated fixings
 - 2. All modern doors, windows, frames and architraves
 - 3. All modern fixed and free-standing joinery and associated fixings
 - 4. All modern sanitary ware and associated fixings
 - 5. All modern finishes, fixtures and fittings generally
- NB: All original finishes and fixtures, such as the staircase, skirting and floorboards are to be retained for refurbishment

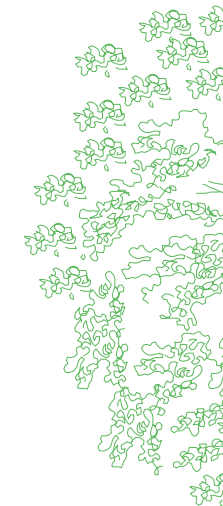

Rev	Description	Date	Drn	Chk
P01	Issued for Planning	03.02.20	AMe	APa

Status
PLANNING

Client
Bohemia Club

Project
The Apple Tree Public House
45 Mount Pleasant
London WC1X 0AE

Drawing
North Elevation as Existing
Showing Demolitions and Stripping out

Project No.	Drawing No.	Revision
18003	BHM-A-P-051	P01
Scale @ A3	Drawn By	
1:100	AMe	

8-10 WARNER STREET

THE SITE

MOUNT PLEASANT

