

- 2. Two new passenger lifts servicing all floors inserted into South East Lightwell. Secondary glazing introduced to existing
- windows to achieve 60min fire rating 3. Façade of 2nd floor pavilion above to enclose South East
- Lightwell at Second Floor level. 4. Existing lantern structures and rooflights over Council
- Chamber to be retained.
- New WCs inserted
- 6. Open office space created to CAT A finish. New services sensitively integrated into historic fabric
- 7. Existing wall retained, keeping original plan form of corridor. Doors removed into Open office space.
- 8. Existing archways retained.
- 9. New WCs inserted within existing location.
- 10. Council Chamber roof to be thermally upgraded externally. 11. Existing passenger lifts to be closed up and not accessed at
- 12. Acoustic dry lining to walls separating open office space and Camden centre.
- 13. Service gantry and staircase to be inserted in lightwell for
- access to plant at each level. 14. Parquet floors in location of existing corridors to be retained.
- 15. Overhead downstand retained to delineate existing wall
- 16. New sliding screens that closely match the existing, to replace the existing single glazed windows - to facilitate safe access & maintenance to Council Chamber rooflight.


Drawings are based on survey data and may not accurately represent what is physically present.

Notes:

All dimensions are to be verified on site before proceeding with the work.

All dimensions are in millimeters unless noted otherwise.

Purcell shall be notified in writing of any discrepancies.

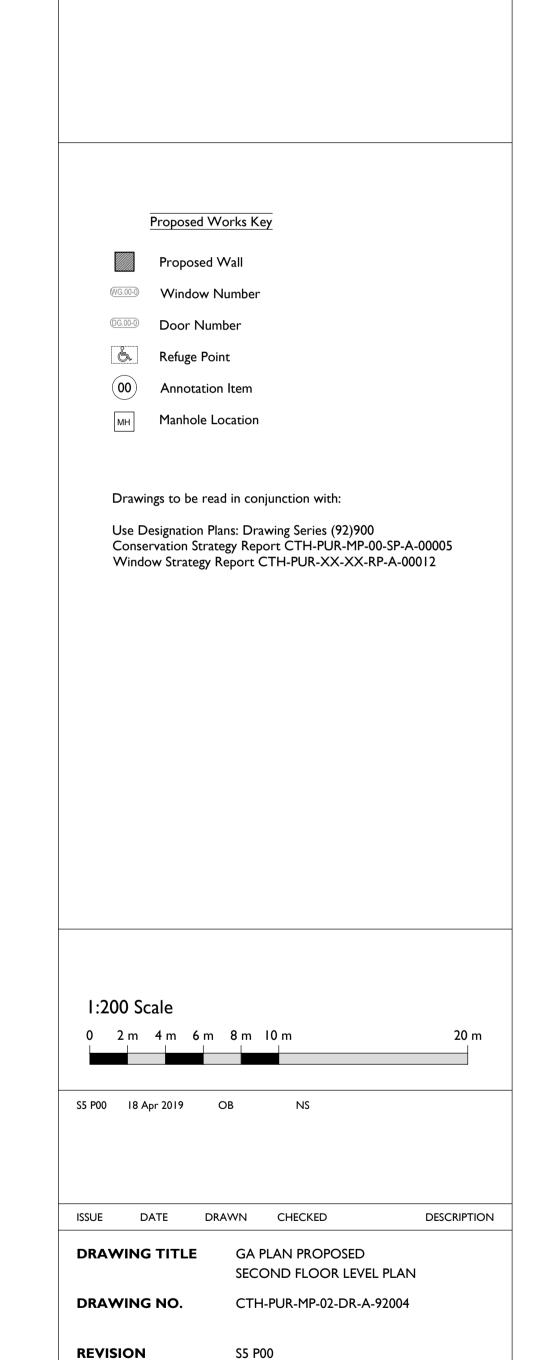

**PURCELI** 

Camden Town Hall

AIL 1:200 @AI

**DRAWING STATUS** S5 SUITABLE FOR PLANNING

Lendlease

**SIZE & SCALE** 

CLIENT

PROJECT

**JOB NUMBER**