


Proposed Ground Floor
1:50

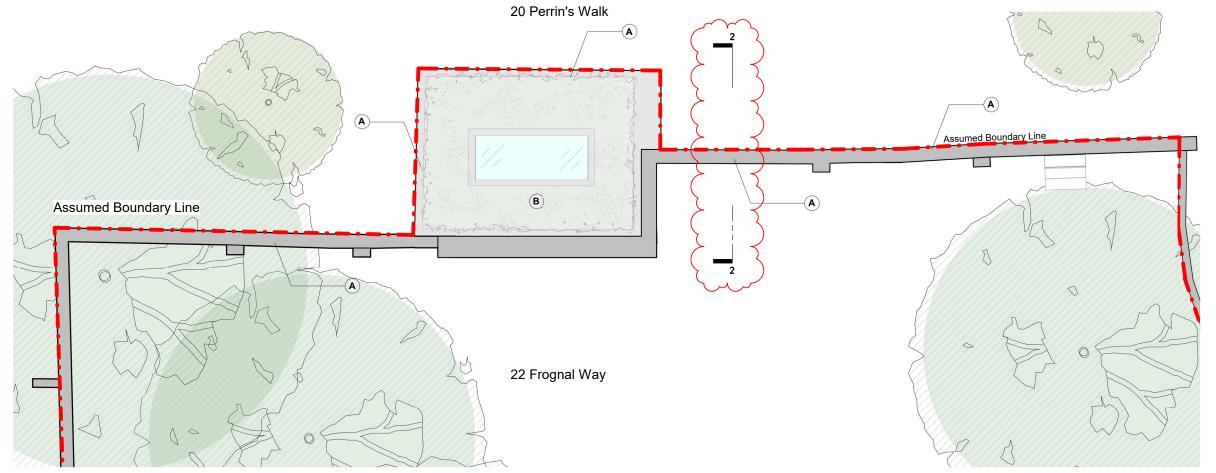

Proposed Roof Plan

1:50

## PROPOSED DRAWING NOTES:

A. Existing brick wall to be carefully rebuilt to match existing. Existing bricks to be salvaged and reused where possible with lime mortar. Discreet brick butresses to be built to match the location of the existing ones and matching new ones introduced where required to ensure the boundary wall meets current standards.

B. Outbuilding renovation works as per consented scheme (ref.2019/3210/P)

C. New gate opening formed as per consented scheme (ref.2019/5044/P)
D. Perimeter hedging to landscape designer's details, as per the approved Landscape scheme (ref.2019/3398/P)

E. Outline of the proposed new footir indicated, to Structural Engineer's details.

F. Footing size reduced around the existing tree to minimise the impact on routes. Refer to Arboricultural report submitted in support of this application for further details.

G. Replacement tree (indicative) in line with the approved Landscape scheme (ref.2019/3398/P)

PLANNING

KSR ARCHITECTS & INTERIOR DESIGNERS

22 FROGNAL WAY

**Proposed Plans** 

FGW0 P-(0)-100