

21 Maresfield Gardens London



Planning Compliance Report Report 20472.PCR.01 Rev A

Pinzauer 62 Wilson Street London EC2A 2BU













	Report 20472.PCR.01 Revision History						
	First Issue Date: 27/02/2020						
А	19/05/20 Configuration and model of plant units updated, along with calculations deriving their noise impact and necessary noise mitigation measures		D				
В			Е				
С	С		F				
	Written by: Chec				Approved by:		

Written by:	Checked by:	Approved by:
John Gray	Duncan Arkley MIOA	Kyriakos Papanagiotou MIOA
Junior Acoustic Consultant	Senior Acoustic Consultant	Managing Director

Disclaimer

KP Acoustics Ltd. has used reasonable skill and care to complete this technical document, within the terms of its brief and contract with the resources devoted to it by agreement with the client. We disclaim any responsibility to the client and others in respect of any matters outside the stated scope. This report is confidential to the client and we accept no responsibility to third parties to whom this report, or any part thereof, is made known. KP Acoustics Ltd. accepts no responsibility for data provided by other bodies and no legal liability arising from the use by other persons of data or opinions contained in this report.

KP Acoustics Ltd. 2020



Contents

1.0	INTRODUCTION	1
2.0	SITE SURVEYS	1
2.1	Site Description	1
2.2	Environmental Noise Survey Procedure	2
2.3	Equipment	3
3.0	RESULTS	4
4.0	NOISE ASSESSMENT GUIDANCE	4
4.1	BS4142: 2014 'Methods for rating and assessing industrial and commercial sound'	4
4.2	Local Authority Guidance	6
5.0	NOISE IMPACT ASSESSMENT	6
5.1	Proposed Plant Installations	6
5.2	Closest Noise Sensitive Receiver	7
5.3	Calculations	7
6.0	NOISE CONTROL MEASURES	10
6.1	Anti-Vibration Mounting Strategy	11
7.0	CONCLUSION	11

List of Attachments

20472. TH1 Environmental Noise Time History

20472.Daytime.LA90 Statistical analysis for representative daytime L_{A90} 20472.Night-time.LA90 Statistical analysis for representative night-time L_{A90}

Appendix A Glossary of Acoustics Terminology

Appendix B Acoustic Calculations

Appendix C Anti-Vibration Mounting Specification Reference Document



1.0 INTRODUCTION

KP Acoustics Ltd has been commissioned by Pinzauer, 62 Wilson Street, London, EC2A 2BU, to undertake a noise impact assessment of a proposed plant unit installation serving the building at 21 Maresfield Gardens, London, NW3 5SD.

A 24 hour environmental noise survey has been undertaken on site in order to prepare a noise impact assessment in accordance with BS4142:2014 'Method for rating and assessing industrial and commercial sound' as part of the planning requirements of Camden.

This report presents the methodology and results from the environmental survey, followed by calculations in accordance with BS4142 to provide an indication as to the likelihood of the noise emissions from the proposed plant unit installation having an adverse impact on the closest noise sensitive receiver. Mitigation measures will be outlined as appropriate.

2.0 SITE SURVEYS

2.1 Site Description

As shown in Figure 2.1, the site is bounded by 23 Maresfield Gardens to the North, a school playground to the West, 19 Maresfield Gardens to the South, and Maresfield Gardens to the East.



Figure 2.1 Site Location Plan (Image Source: Google Maps)



Initial inspection of the site revealed that the background noise profile at the monitoring location was typical of an urban cityscape environment, with the dominant source being road traffic noise from the surrounding roads.

2.2 Environmental Noise Survey Procedure

Continuous automated monitoring was undertaken for the duration of the noise survey between 14:34 on 13/02/2020 and 14:38 on 14/02/2020.

The environmental noise measurement position, proposed plant installation locations, and the closest noise sensitive receiver relative to the plant installations are described within Table 2.1 and shown within Figure 2.2.

lcon	Descriptor	Location Description
0	Noise Measurement Position	The meter was installed on a window on the second floor of the front façade. A correction of 3dB has been applied to account for non-free field conditions
	Potential Closest Noise Sensitive Receivers	Ground floor window on the front façade of 19 Maresfield Gardens. First floor window on the front façade of 23 Maresfield Gardens
	Proposed Plant Installation Location A	Proposed plant installations are outlined in Section 5.1
	Proposed Plant Installation Location B	rroposeu piant installations are outlined in Section 3.1

Table 2.1 Measurement position and description





Figure 2.2 Site measurement position, identified receiver and proposed plant unit installation locations (Image Source: Google Maps)

The choice of the position was based both on accessibility and on collecting representative noise data in relation to the nearest noise sensitive receiver relative to the proposed plant installations.

Weather conditions were generally dry with light winds and therefore suitable for the measurement of environmental noise. The measurement procedure complied with ISO 1996-2:2017 Acoustics 'Description, measurement and assessment of environmental noise - Part 2: Determination of environmental noise levels'.

2.3 Equipment

The equipment calibration was verified before and after use and no abnormalities were observed. The equipment used is described within Table 2.3.

	Measurement instrumentation	Serial no.	Date	Cert no.	
	Svantek Type 977 Class 1 Sound Level Meter	34104			
Noise Kit 3	Free-field microphone Aco Pacific 7052E	66830	14/02/2018	14008638	
	Preamp Svantek 2v12L	17293			
	Svantek External windshield	-	-	-	
	Rion NC-74 Class 1 Calibrator	34904938	05/03/2019	04174/1	

Table 2.3 Measurement instrumentation

3.0 RESULTS

The L_{Aeq: 5min}, L_{Amax: 5min}, L_{A10: 5min} and L_{A90: 5min} acoustic parameters were measured throughout the duration of the survey. Measured levels are shown as a time history in Figure 20472.TH1.

Representative background noise levels are shown in Table 3.1 for daytime and night-time.

It should be noted that the representative background noise level has been derived from the most commonly occurring $L_{A90,5 \text{ min}}$ levels measured during the environmental noise survey undertaken on site, as shown in 20472. Daytime. LA90 and 20472. Night-time. LA90 attached.

Time Period	Representative background noise level L _{A90} dB(A)
Daytime (07:00-23:00)	46
Night-time (23:00-07:00)	30

Table 3.1 Representative background noise levels

4.0 NOISE ASSESSMENT GUIDANCE

4.1 BS4142: 2014 'Methods for rating and assessing industrial and commercial sound'

British Standard BS4142:2014 'Methods for rating and assessing industrial and commercial sound' describes a method for rating and assessing sound of an industrial and/or commercial nature, which includes:

- Sound from industrial and manufacturing processes
- Sound from fixed installations which comprise mechanical and electrical plant and equipment
- Sound from the loading and unloading of goods and materials at industrial and/or commercial premises, and
- Sound from mobile plant and vehicles that is an intrinsic part of the overall sound emanating from premises or processes.

This Standard compares the Rating Level due to the noise source/s under assessment for a one-hour period during the daytime (07:00 - 23:00 hours) and a fifteen-minute period during the night-time (23:00 - 07:00 hours) with the existing background noise level in terms of an L_{A90} when the noise source is not operating.

It should be noted that the Rating Level is the Specific Sound Level in question ($L_{Aeq, Tr}$), including any relevant acoustic feature corrections, as follows:

19 May 2020



- **Tonality** 'For sound ranging from not tonal to prominently tonal the Joint Nordic Method gives a correction of between 0dB and +6dB for tonality. Subjectively, this can be converted to a penalty of 2dB for a tone which is just perceptible at the noise receptor, 4dB where it is clearly perceptible, and 6dB where it is highly perceptible'
- Impulsivity 'A correction of up to +9dB can be applied for sound that is highly impulsive, considering both the rapidity of the change in sound level and the overall change in sound level. Subjectively, this can be converted to a penalty of 3dB for impulsivity which is just perceptible at the noise receptor, 6dB where it is clearly perceptible, and 9dB where it is highly perceptible'
- **Intermittency** 'If the intermittency is readily distinctive against the residual acoustic environment, a penalty of 3dB can be applied'
- Other sound characteristics 'Where the specific sound features characteristics that are neither tonal nor impulsive, though otherwise are readily distinctive against the residual acoustic environment, a penalty of 3dB can be applied'

Once the Rating Level has been obtained, the representative background sound level is subtracted from the Rating Level to obtain an initial estimate of the impact, as follows:

- Typically, the greater this difference, the greater the magnitude of the impact
- A difference of around +10 dB or more is likely to be an indication of a significant adverse impact, depending on the context
- A difference of around +5 dB could be an indication of an adverse impact, depending on the context
- The lower the rating level is relative to the measured background sound level, the less
 likely it is that there will be an adverse impact or significant adverse impact. Where
 the rating level does not exceed the background sound level, this is an indication of
 the specific sound having a low impact, depending on the context

NOTE: Adverse impacts may include but not be limited to annoyance and sleep disturbance. Not all adverse impacts will lead to complaints and not every complaint is proof of an adverse impact.

The initial estimate of the impact may then be modified by taking consideration of the context in which the sound occurs.

19 May 2020



4.2 Local Authority Guidance

The guidance provided by The London Borough of Camden for noise emissions of new plant in this instance is as follows:

The noise criteria, as per the Local Plan 2017 of London Borough of Camden, British Standard 4142:2014 'Methods for rating and assessing industrial and commercial sound' should be considered as the main reference document for the assessment. The resultant 'Rating Level' would be considered as follows:

		Rati	ng Level Acceptability Ra	nge
Period	Assessment Location	Green: noise is considered to be at an acceptable level	Amber: noise is observed to have an adverse effect level, but which may be considered acceptable when assessed in the context of other merits of the development	Red: noise is observed to have a significant adverse effect.
Daytime (7:00-23:00)	Garden used for main amenity (free field) and Outside living or dining or Bedroom window (façade)	10dB below background	9 dB below and 5dB above background	5dB above background
Night-time (23:00-7:00)	Outside bedroom window (façade)	10dB below background and no events exceeding 57dB L_{Amax}	9db below and 5dB above background or noise events between 57dB and 88dB L_{Amax}	5dB above background and/or events exceeding 88dB

Table 4.1 Camden noise criteria for plant and machinery

5.0 NOISE IMPACT ASSESSMENT

5.1 Proposed Plant Installations

It is understood that the proposed plant installation is comprised of the following units:

- 1 No. Daikin EPGA-16DV Air Conditioning Unit
- 1 No. Daikin EPGA-11DV Air Conditioning Unit
- 1 No. Daikin ERGA-06DV Air Conditioning Unit
- 1 No. Daikin ERGA-08DV Air Conditioning Unit

19 May 2020



It is understood that the Daikin EPGA-16DV air conditioning unit will be positioned in installation location B, at the North-Eastern corner of the property, whilst the remaining three units will be installed at location A beneath the stairs leading into the property. These two installation locations are shown in Figure 2.2.

The noise emission levels as provided by the manufacturer for the units are shown in Table 5.1.

11-2	Hait Bassinton		Octave Frequency Band (Hz)						Overall	
Unit	Descriptor	63	125	250	500	1k	2k	4k	8k	(dBA)
Daikin EPGA-16DV	SPL@1m (dB)					55				
Daikin EPGA-11DV	SPL@1m (dB)		No spectral noise data available				55			
Daikin ERGA-06DV	SPL@1m (dB)						49			
Daikin ERGA-08DV	SPL@1m (dB)						50			

Table 5.1 Plant Units Noise Emission Levels as provided by the manufacturer

5.2 Closest Noise Sensitive Receiver

The closest noise sensitive receivers to the proposed installation locations have been identified as being the residential windows of 19 and 23 Maresfield Gardens. Plant installation location A is approximately 5 metres from the receiver window at 19 Maresfield Gardens, and the 1st floor front window of 23 Maresfield Gardens is located approximately 6 metres from proposed plant installation location B, as shown in Figure 2.2.

5.3 Calculations

The 'Specific Sound Level' of each plant unit installation has been calculated at 1m from the closest receiver using the noise levels shown in Table 5.1, and corrected due to different acoustic propagation features such as distance, reflective surfaces, screening elements, etc. Detailed calculations for each plant unit installation are shown in Appendix B.

The 'Rating Level' of each plant installation have been assessed following the guidelines of BS4142 for the night-time period as the plants could be operational at any time, with a subsequent conclusion taking into consideration the above context. The full BS4142 assessment for both possible installation configurations is presented in Tables 5.2, 5.3 and 5.4.



	BS4142 Assessment					
Source:	Proposed air conditioning units installed at 21 Maresfield Gardens					
Operating Period:	Night-time					
Reference time interval (<i>Tr</i>):	15 minutes					
Receiver:	Front façade Gardens	e ground floor residential window of 19 Maresfield				
Element	Level (dB)	Comment				
Specific Sound Level L_s = L_{Aeq} , $ au_r$	27	Equivalent continuous A-weighted sound pressure level produced by the specific sound source at the assessment location over a given reference time interval, <i>Tr</i> . In this case, the specific sound levels take into consideration published noise data from the manufacturers, with appropriate corrections for attenuation due to distance, reflections, and any screening or proposed mitigation				
Representative Background Noise Level $L_{A90, T}$	30	Sound pressure level that is exceeded by the residual sound at the assessment location for 90% of a given time interval, <i>T</i> . Derived using the most common occurring levels <i>L</i> _{A90, 5min} during the environmental noise survey undertaken on site				
Acoustic Feature Correction	+3	A +3dB correction has been applied for intermittency				
Rating Level	30	Rating Level = Specific Sound Level + Acoustic Feature Corrections				
Excess of rating over background sound level	0					

Assessment Indication

Whilst the rating level is not 10dB below the representative background noise level in Section 11: Assessment of the Impacts of BS 4142:2014 it is stated that: 'Where background sound levels and rating levels are low, absolute levels might be as, or more, relevant than the margin by which the rating level exceeds the background. This is especially true at night.'

Consequently, with a rating level of 30dB for the proposed plant installation, assessment indicates unlikely adverse impact on the receiver provided that the mitigation measures outlined in Section 6.1 are implemented

Table 5.2 BS4142 assessment for receiver at 19 Maresfield Gardens



	BS4142 Assessment					
Source:	Proposed air conditioning units installed at 21 Maresfield Gardens					
Operating Period:	Night-time					
Reference time interval (<i>Tr</i>):	15 minutes					
Receiver:	Front façad Gardens	e first floor residential window of 23 Maresfield				
Element	Level (dB)	Comment				
Specific Sound Level L_s = L_{Aeq} , $ au_r$	27	Equivalent continuous A-weighted sound pressure level produced by the specific sound source at the assessment location over a given reference time interval, <i>Tr</i> . In this case, the specific sound levels take into consideration published noise data from the manufacturers, with appropriate corrections for attenuation due to distance, reflections, and any screening or proposed mitigation				
Representative Background Noise Level $L_{ m A90,}$ $ au$	30	Sound pressure level that is exceeded by the residual sound at the assessment location for 90% of a given time interval, <i>T</i> . Derived using the most common occurring levels <i>L</i> _{A90, 5min} during the environmental noise survey undertaken on site				
Acoustic Feature Correction	+3	A +3dB correction has been applied for intermittency				
Rating Level	30	Rating Level = Specific Sound Level + Acoustic Feature Corrections				
Excess of rating over background sound level	0					

Assessment Indication

Whilst the rating level is not 10dB below the representative background noise level in Section 11: Assessment of the Impacts of BS 4142:2014 it is stated that: 'Where background sound levels and rating levels are low, absolute levels might be as, or more, relevant than the margin by which the rating level exceeds the background. This is especially true at night.'

Consequently, with a rating level of 30dB for the proposed plant installation, assessment indicates unlikely adverse impact on the receiver provided that the mitigation measures outlined in Section 6.2 are implemented

Table 5.3 BS4142 assessment for receiver at 23 Maresfield Gardens



6.0 NOISE CONTROL MEASURES

In order to achieve the specific sound level and subsequent rating level shown in the assessment above, the following noise control strategy should be adopted.

To control the noise emissions from the three air conditioning units installed beneath the stairs at the entrance to the property, acoustic louvres should be installed on either side of the spandrel. The total insertion loss required by these louvres are shown in Table 6.1.

Unit	Total Insertion Loss Levels (dB)
Acoustically rated louvred panels on Northern side of the spandrel	13
Acoustically rated louvred panels on Southern side of the spandrel	16

Table 6.1 Insertion loss figures to be provided by acoustic louvres at installation location A

Additionally, an acoustically absorptive lining should be installed on all surfaces beneath the stairs, such as AcoustLine from EEC, or CMS-Danskin.

The noise emissions of the fourth plant unit, positioned at the North-Eastern corner of the property, must also be considered. It is recommended that an acoustic enclosure is installed around this plant unit in order to reduce the sound received at 23 Maresfield Gardens first floor window. The acoustic enclosure should provide the attenuation shown in Table 6.2.

Unit	Total Insertion Loss Level (dB)
Acoustic enclosure with associated louvres	18

Table 6.2 Insertion loss figures to be provided by acoustic enclosure surrounding unit at installation location B

We would recommend the following suppliers of the aforementioned enclosures and screens:

- Environmental Equipment Corporation
- Noico Ltd
- Waterloo Acoustics
- Allaway Acoustics
- Wakefield Acoustics
- Caice



6.1 Anti-Vibration Mounting Strategy

In the case of all plant units, appropriate anti-vibration mounts should be installed in order to ensure that vibrations do not give rise to structure-borne noise. Appendix C outlines detailed advice in order to ensure that the system installer selects the appropriate anti-vibration mount for the installation.

It is the supplier's responsibility to ensure that all mountings offered are suitable for the loads, operating and environmental conditions which will prevail.

7.0 CONCLUSION


An environmental noise survey has been undertaken at 21 Maresfield Gardens, London, NW3 5SD, by KP Acoustics Ltd between 14:34 on 13/02/2020 and 14:38 on 14/02/2020. The results of the survey have enabled a representative background noise level to be set.


Manufacturer's noise data of proposed plant units has been used to obtain Specific and Rated Noise Level at the nearest noise sensitive receiver in accordance with British Standard BS4142:2014 for compliance with Camden requirements.

The rating level was compared with the representative background noise level to assess the likelihood of impact considering the environmental noise context of the area as per the requirements of BS4142:2014.


It has been concluded that noise emissions from the proposed plant units in either installation configuration would not have an adverse impact on the nearest residential receivers provided that the noise control strategy presented in Section 6 is followed.

19 May 2020

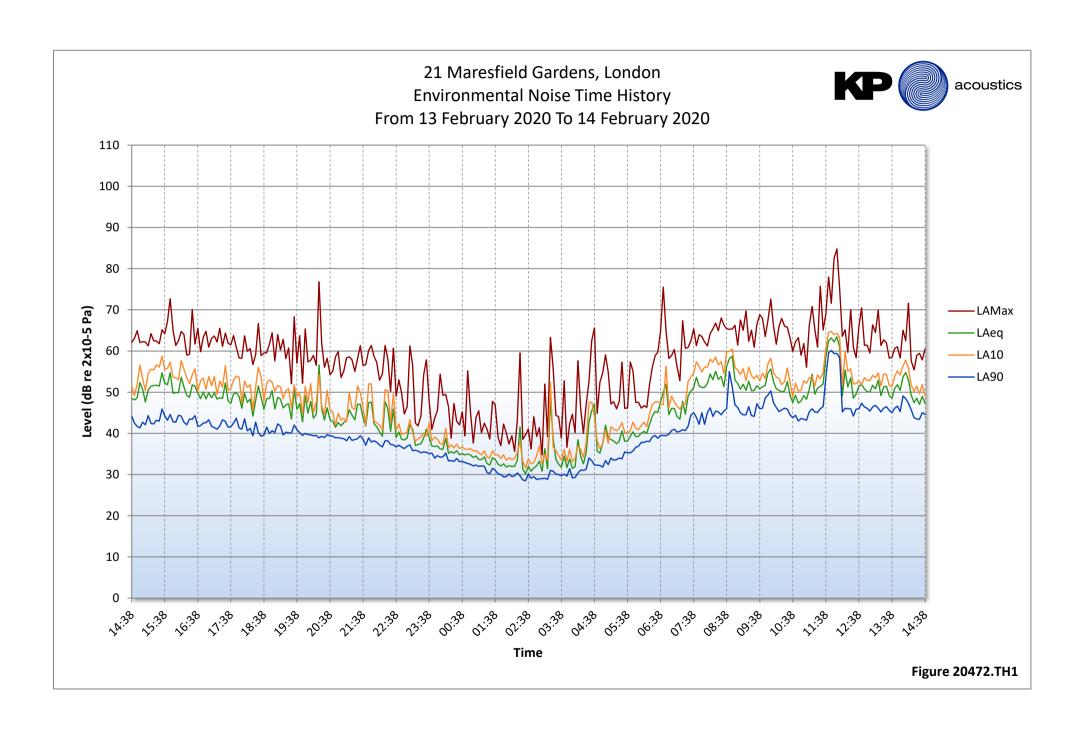






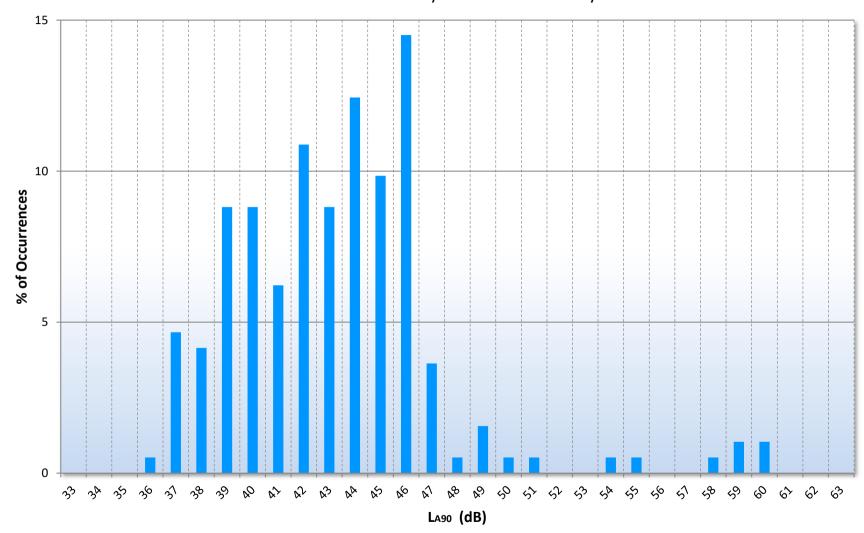





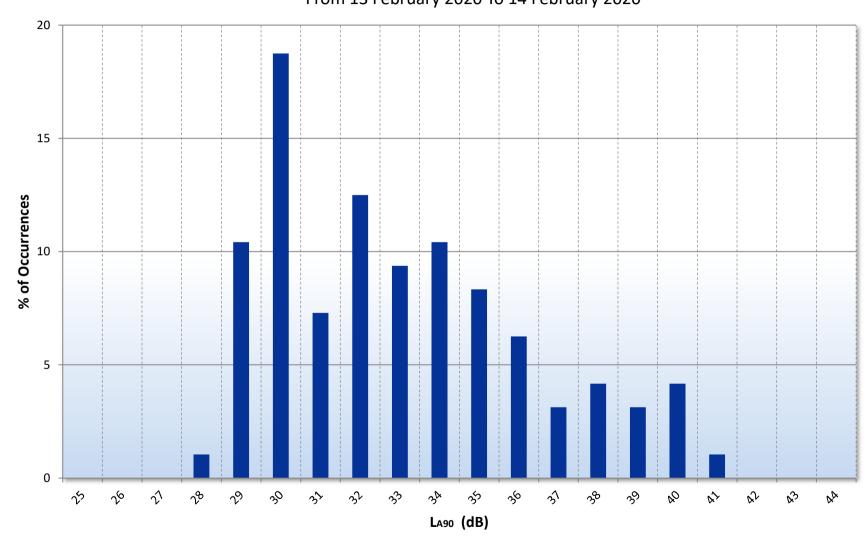

APPENDIX A



GENERAL ACOUSTIC TERMINOLOGY

Decibel scale - dB

In practice, when sound intensity or sound pressure is measured, a logarithmic scale is used in which the unit is the 'decibel', dB. This is derived from the human auditory system, where the dynamic range of human hearing is so large, in the order of 10¹³ units, that only a logarithmic scale is the sensible solution for displaying such a range.

Decibel scale, 'A' weighted - dB(A)

The human ear is less sensitive at frequency extremes, below 125Hz and above 16Khz. A sound level meter models the ears variable sensitivity to sound at different frequencies. This is achieved by building a filter into the Sound Level Meter with a similar frequency response to that of the ear, an A-weighted filter where the unit is dB(A).

L_{eq}

The sound from noise sources often fluctuates widely during a given period of time. An average value can be measured, the equivalent sound pressure level $L_{\rm eq}$. The $L_{\rm eq}$ is the equivalent sound level which would deliver the same sound energy as the actual fluctuating sound measured in the same time period.

L_{10}

This is the level exceeded for no more than 10% of the time. This parameter is often used as a "not to exceed" criterion for noise.

L_{90}

This is the level exceeded for no more than 90% of the time. This parameter is often used as a descriptor of "background noise" for environmental impact studies.

L_{max}

This is the maximum sound pressure level that has been measured over a period.

Octave Bands

In order to completely determine the composition of a sound it is necessary to determine the sound level at each frequency individually. Usually, values are stated in octave bands. The audible frequency region is divided into 11 such octave bands whose centre frequencies are defined in accordance with international standards. These centre frequencies are: 16, 31.5, 63, 125, 250, 500, 1000, 2000, 4000, 8000 and 16000 Hertz.

Environmental noise terms are defined in BS7445, *Description and Measurement of Environmental Noise*.

APPENDIX A



APPLIED ACOUSTIC TERMINOLOGY

Addition of noise from several sources

Noise from different sound sources combines to produce a sound level higher than that from any individual source. Two equally intense sound sources operating together produce a sound level which is 3dB higher than a single source and 4 sources produce a 6dB higher sound level.

Attenuation by distance

Sound which propagates from a point source in free air attenuates by 6dB for each doubling of distance from the noise source. Sound energy from line sources (e.g. stream of cars) drops off by 3dB for each doubling of distance.

Subjective impression of noise

Hearing perception is highly individualised. Sensitivity to noise also depends on frequency content, time of occurrence, duration of sound and psychological factors such as emotion and expectations. The following table is a guide to explain increases or decreases in sound levels for many scenarios.

Change in sound level (dB)	Change in perceived loudness					
1	Imperceptible					
3	Just barely perceptible					
6	Clearly noticeable					
10	About twice as loud					

Transmission path(s)

The transmission path is the path the sound takes from the source to the receiver. Where multiple paths exist in parallel, the reduction in each path should be calculated and summed at the receiving point. Outdoor barriers can block transmission paths, for example traffic noise. The effectiveness of barriers is dependent on factors such as its distance from the noise source and the receiver, its height and construction.

Ground-borne vibration

In addition to airborne noise levels caused by transportation, construction, and industrial sources there is also the generation of ground-borne vibration to consider. This can lead to structure-borne noise, perceptible vibration, or in rare cases, building damage.

Sound insulation - Absorption within porous materials

Upon encountering a porous material, sound energy is absorbed. Porous materials which are intended to absorb sound are known as absorbents, and usually absorb 50 to 90% of the energy and are frequency dependent. Some are designed to absorb low frequencies, some for high frequencies and more exotic designs being able to absorb very wide ranges of frequencies. The energy is converted into both mechanical movement and heat within the material; both the stiffness and mass of panels affect the sound insulation performance.



APPENDIX B

21 Maresfield Gardens, London, NW3 5SD

PLANT NOISE EMISSIONS CALCULATIONS

palkin EPGA-16DV (Sound Pressure Level @1m) correction for number of units (1),dB dinimum attenuation provided by distance (14m), dB dinimum attenuation ground to surface reflections (1), dB dinimum attenuation due to building envelope, dB dinimum attenuation due to building envelope, dB dinimum attenuation of units (1),dB correction for number of units (1),dB correction for number of units (1),dB dinimum attenuation provided by distance (55m), dB dinimum attenuation provided by distance (55m), dB dinimum attenuation required by proposed acoustic enclosure, dB dinimum attenuation required by proposed acoustic enclosure, dB dinimum attenuation required by distance (9m), dB dinimum attenuation required by proposed acoustic enclosure, dB dinimum attenuation provided by distance (9m), dB dinimum attenuation required by proposed acoustic enclosure, dB dinimum attenuation enclosure, dB d	Source: Plant units at installation Location A				Freque	ency, Hz				-(0/4)
Correction for number of units (1),dB Correction due to surface reflections (1), dB Correction due to surface reflections (1), dB Correction due to surface reflections (1), dB Correction due to building envelope, dB Correction for number of units (1),dB Correction for number of units (1),dB Correction due to surface reflections (3), dB Correction due to surface reflections (3), dB Correction due to surface reflections (3), dB Correction for number of units (1),dB Correction for number of units (1),dB Correction for number of units (1),dB Correction due to surface reflections (3), dB Correction de to surface reflections (3), dB Correction due to surface refle	Receiver: Front ground floor window of 19 Maresfield Gardens	63	125	250	500	1k	2k	4k	8k	dB(A)
Correction for number of units (1),dB Correction due to surface reflections (1), dB Correction due to surface reflections (1), dB Correction due to surface reflections (1), dB Correction due to building envelope, dB Correction for number of units (1),dB Correction for number of units (1),dB Correction due to surface reflections (3), dB Correction due to surface reflections (3), dB Correction due to surface reflections (3), dB Correction for number of units (1),dB Correction for number of units (1),dB Correction for number of units (1),dB Correction due to surface reflections (3), dB Correction de to surface reflections (3), dB Correction due to surface refle										
Adminimum attenuation provided by distance (14m), dB Alinimum attenuation provided by distance (14m), dB Alinimum attenuation use to building envelope, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by roposed acoustic enclosure, dB Alinimum attenuation required by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by distance (9m), dB Alinimum attenuation	Daikin EPGA-16DV (Sound Pressure Level @1m)									55
Alinimum attenuation provided by distance (14m), dB Alinimum attenuation due to building envelope, dB Alinimum attenuation due to building envelope, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation pro	Correction for number of units (1),dB									0
Alinimum attenuation due to building envelope, dB Alinimum attenuation required by proposed acoustic enclosure, dB Otal Specific Level of Plant Unit at Receiver Daikin EPGA-16DV (Sound Pressure Level @1m) Correction for number of units (1),dB Otal Specific Level of building envelopes data acoustic enclosure, dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Otal Specific Level of Plant Unit at Receiver Daikin ERGA-06DV (Sound Pressure Level @1m) Correction for number of units (1),dB Otal Specific Level of Plant Unit at Receiver Daikin ERGA-08DV (Sound Pressure Level @1m) Correction due to surface reflections (3), dB Alinimum attenuation required by proposed acoustic enclosure, dB Otal Specific Level of Plant Unit at Receiver Daikin ERGA-08DV (Sound Pressure Level @1m) Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation pro	Correction due to surface reflections (1), dB									3
Adminimum attenuation required by proposed acoustic enclosure, dB cotal Specific Level of Plant Unit at Receiver Daikin EPGA-16DV (Sound Pressure Level @1m) correction for number of units (1),dB dinimium attenuation provided by distance (6.5m), dB dinimium attenuation provided by distance (6.5m), dB dinimium attenuation frequired by proposed acoustic enclosure, dB cotal Specific Level of Plant Unit at Receiver Daikin ERGA-06DV (Sound Pressure Level @1m) correction due to surface reflections (3), dB dinimium attenuation provided by distance (9m), dB dinimium attenuation provided by distance (9m), dB dinimium attenuation required by proposed acoustic enclosure, dB cotal Specific Level of Plant Unit at Receiver Daikin ERGA-08DV (Sound Pressure Level @1m) correction due to surface reflections (3), dB dinimium attenuation provided by distance (9m), dB dinimium attenuation required by proposed acoustic enclosure, dB cotal Specific Level of Plant Unit at Receiver 10 Daikin ERGA-08DV (Sound Pressure Level @1m) correction due to surface reflections (3), dB dinimium attenuation provided by distance (9m), dB dinimium attenuation required by proposed acoustic enclosure, dB cotal Specific Level of Plant Unit at Receiver 10 Daikin ERGA-08DV (Sound Pressure Level @1m) correction due to surface reflections (3), dB do 0 do 0 do 0 do 0 do 0 do 0 the plant units 10 Daikin ERGA-08DV (Sound Pressure Level @1m) correction for number of units (1),dB do 0 do	Minimum attenuation provided by distance (14m), dB									-23
Total Specific Level of Plant Unit at Receiver Daikin EPGA-16DV (Sound Pressure Level @1m) Dorrection for number of units (1),dB Dorrection due to surface reflections (3), dB Dorrection for number of units (1),dB Dorrection due to surface reflections (3), dB Dorrection due to surface reflections (3), dB Dorrection due to surface reflections (3), dB Dorrection for number of units (1),dB Dorrection for number of units (1),dB Dorrection due to surface reflections (3), dB Dorrection due to surface reflections (3), dB Dorrection for number of units (1),dB Dorrection for number of units (1	Minimum attenuation due to building envelope, dB									-10
Daikin EPGA-16DV (Sound Pressure Level @1m) Correction due to surface reflections (3), dB Collinimum attenuation provided by distance (6.5m), dB Correction for number of units (1),dB C	Minimum attenuation required by proposed acoustic enclosure, dB									-18
Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Correction for number of units (1),dB Correction for number of units (1),dB Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Correction for number of units (1),dB Correction for number of units (1),dB Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Correction for number of units (1),dB Correction for number of un	Total Specific Level of Plant Unit at Receiver									7
Adinimum attenuation provided by distance (6.5m), dB Adinimum attenuation provided by proposed acoustic enclosure, dB Adinimum attenuation required by proposed acoustic enclosure, dB Adinimum attenuation required by proposed acoustic enclosure, dB Adinimum attenuation required by proposed acoustic enclosure, dB Adinimum attenuation provided by distance (9m), dB Adinimum attenuation provided by distance (9m), dB Adinimum attenuation provided by distance (9m), dB Adinimum attenuation required by proposed acoustic enclosure, dB Adinimum attenuation provided by distance (9m), dB Adinimum attenuation provided by dis	Daikin EPGA-16DV (Sound Pressure Level @1m)									55
Alinimum attenuation provided by distance (6.5m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation of units (1),dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum att	Correction for number of units (1),dB									0
Adminimum attenuation required by proposed acoustic enclosure, dB Potal Specific Level of Plant Unit at Receiver Politic ERGA-06DV (Sound Pressure Level @1m) Porrection for number of units (1),dB Potal Specific Level of Plant Unit at Receiver Politic ERGA-08DV (Sound Pressure Level @1m) Potal Specific Level of Plant Unit at Receiver Politic ERGA-08DV (Sound Pressure Level @1m) Potal Specific Level of Plant Unit at Receiver Politic Ergan (Sound Pressure Level @1m) Potal Specific Level of Plant Unit at Receiver Politic Ergan (Sound Pressure Level @1m) Potal Specific Level of Plant Unit at Receiver Politic Ergan (Sound Pressure Level @1m) Potal Specific Level of Plant Unit at Receiver Potal Specific Level of Plant Unit at Receiver Potal Specific Level of Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver Potal Specific Level of All Plant Unit Installations at Receiver	Correction due to surface reflections (3), dB									0
Potal Specific Level of Plant Unit at Receiver Daikin ERGA-06DV (Sound Pressure Level @1m) Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Cotal Specific Level of Plant Unit at Receiver Daikin ERGA-08DV (Sound Pressure Level @1m) Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Cotal Specific Level of Plant Unit at Receiver 127 128 129 130 149 150 150 160 170 181 181 181 182 183 184 184 185 184 184 185 185 184 185 185	Minimum attenuation provided by distance (6.5m), dB									-16
No spectral noise data available for the plant units (1),dB (1),d	Minimum attenuation required by proposed acoustic enclosure, dB									-13
No spectral noise data available for the plant units (1),dB (1),d	Total Specific Level of Plant Unit at Receiver									26
Adminimum attenuation provided by distance (9m), dB Adminimum attenuation provided by proposed acoustic enclosure, dB Adminimum attenuation required by proposed acoustic enclosure, dB Adminimum attenuation required by proposed acoustic enclosure, dB Adminimum attenuation required by proposed acoustic enclosure, dB Adminimum attenuation provided by distance (9m), dB Adminimum attenuation provided by distance (9m), dB Adminimum attenuation required by proposed acoustic enclosure, dB Adminimum attenuation required by proposed	Daikin ERGA-06DV (Sound Pressure Level @1m)									49
the plant units of the plant units the plant units the plant units of the plant units the plant units the plant units of the plant units the plant units the plant units of the plant units the plant u	Correction for number of units (1),dB	Nο	snec	tralı	nnise	data	ava	ilahle	for	0
Alinimum attenuation required by proposed acoustic enclosure, dB -13 Fotal Specific Level of Plant Unit at Receiver Daikin ERGA-08DV (Sound Pressure Level @1m) Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Fotal Specific Level of Plant Unit at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Statuta Acoustic Feature Corrections Conality Impulsivity Intermittency 3	Correction due to surface reflections (3), dB		spec					IIGDIC	. 101	0
Alinimum attenuation required by proposed acoustic enclosure, dB -13 Fotal Specific Level of Plant Unit at Receiver Daikin ERGA-08DV (Sound Pressure Level @1m) Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Fotal Specific Level of Plant Unit at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Statuta Acoustic Feature Corrections Conality Impulsivity Intermittency 3	Minimum attenuation provided by distance (9m), dB			th	e pla	nt ur	iits			-19
Daikin ERGA-08DV (Sound Pressure Level @1m) Correction for number of units (1),dB Correction due to surface reflections (3), dB Dinimum attenuation provided by distance (9m), dB Dinimum attenuation required by proposed acoustic enclosure, dB Cotal Specific Level of Plant Unit at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver Cotal Specific Level of all Plant Unit Installations at Receiver 27 Cotal Specific Level of all Plant Unit Installations at Receiver 28 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 29 Cotal Specific Level of all Plant Unit Installations at Receiver 20 Cotal Specific Level of all Plant Unit Installations at Receiver 20 Cotal Specific Level of all Plant Unit Installations at Receiver	Minimum attenuation required by proposed acoustic enclosure, dB				•					-13
Correction for number of units (1),dB Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB Alinimum	Total Specific Level of Plant Unit at Receiver									17
Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB A	Daikin ERGA-08DV (Sound Pressure Level @1m)									50
Correction due to surface reflections (3), dB Alinimum attenuation provided by distance (9m), dB Alinimum attenuation required by proposed acoustic enclosure, dB Alinimum attenuation provided by distance (9m), dB A	Correction for number of units (1),dB									0
Inimum attenuation required by proposed acoustic enclosure, dB Initial Specific Level of Plant Unit at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at Receiver Isotal Specific Level of all Plant Unit Installations at	Correction due to surface reflections (3), dB									0
Total Specific Level of Plant Unit at Receiver 27 28 28 29 29 20 20 20 21 22 23 24 25 25 26 27 27 28 28 29 20 20 20 20 20 20 20 20 20	Minimum attenuation provided by distance (9m), dB									-19
Total Specific Level of all Plant Unit Installations at Receiver 27 284142 Acoustic Feature Corrections 28 Installations at Receiver 29 Installations at Receiver 29 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 21 Installations at Receiver 22 Installations at Receiver 23 Installations at Receiver 24 Installations at Receiver 26 Installations at Receiver 27 Installations at Receiver 28 Installations at Receiver 28 Installations at Receiver 29 Installations at Receiver 29 Installations at Receiver 20 Installations at Receiver 21 Installations at Receiver 22 Installations at Receiver 23 Installations at Receiver 24 Installations at Receiver 25 Installations at Receiver 26 Installations at Receiver 27 Installations at Receiver 28 Installations at Receiver 29 Installations at Receiver 29 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 27 Installations at Receiver 28 Installations at Receiver 29 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 21 Installations at Receiver 22 Installations at Receiver 23 Installations at Receiver 24 Installations at Receiver 25 Installations at Receiver 26 Installations at Receiver 27 Installations at Receiver 28 Installations at Receiver 28 Installations at Receiver 29 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 20 Installations at Receiver 26 Installations at Receiver 27 Installations at Receiver 28 Installations at Receive	Minimum attenuation required by proposed acoustic enclosure, dB									-13
RS4142 Acoustic Feature Corrections Conality Impulsivity Intermittency 3	Total Specific Level of Plant Unit at Receiver									18
ionality mpulsivity ntermittency 3	Total Specific Level of all Plant Unit Installations at Receiver									27
mpulsivity ntermittency 3	BS4142 Acoustic Feature Corrections									
ntermittency 3	Tonality									
ntermittency 3	Impulsivity									
Total Rating Noise Level of all Plant Unit Installations at Receiver	Intermittency									3
	Total Rating Noise Level of all Plant Unit Installations at Receiver									30

Design Criterion 30

^{*}Tonality = +2 just perceptible, +4 clearly perceptible, +6 highly perceptible Impulsivity= +3 just perceptible, +6 clearly perceptible, +9 highly perceptible Intermittency = +3 if present



APPENDIX B

21 Maresfield Gardens, London, NW3 5SD

PLANT NOISE EMISSIONS CALCULATIONS

Source: Plant units at installation Locations A and B				Freque	ency, Hz				-(0/4)
Receiver: Front first floor window of 23 Maresfield Gardens	63	125	250	500	1k	2k	4k	8k	dB(A)
Daikin EPGA-16DV (Sound Pressure Level @1m)									55
Correction for number of units (1),dB									0
Correction due to surface reflections (1), dB									3
Minimum attenuation provided by distance (5m), dB									-14
Minimum attenuation due to building envelope, dB									0
Minimum attenuation required by proposed acoustic enclosure, dB									-18
Total Specific Level of Plant Unit at Receiver									26
Daikin EPGA-16DV (Sound Pressure Level @1m)									55
Correction for number of units (1),dB									0
Correction due to surface reflections (0), dB									0
Minimum attenuation provided by distance (10m), dB									-20
Minimum attenuation required by proposed acoustic enclosure, dB									-16
Total Specific Level of Plant Unit at Receiver									19
Daikin ERGA-06DV (Sound Pressure Level @1m)									49
Correction for number of units (1),dB	No	spec	tralı	nnisa	data	ava	ilahla	for	0
Correction due to surface reflections (0), dB	140	spec					IIabit	. 101	0
Minimum attenuation provided by distance (8m), dB			th	e pla	nt ur	nits			-18
Minimum attenuation required by proposed acoustic enclosure, dB				•					-16
Total Specific Level of Plant Unit at Receiver									15
Daikin ERGA-08DV (Sound Pressure Level @1m)									50
Correction for number of units (1),dB									0
Correction due to surface reflections (0), dB									0
Minimum attenuation provided by distance (8m), dB									-18
Minimum attenuation required by proposed acoustic enclosure, dB									-16
Total Specific Level of Plant Unit at Receiver									16
Total Specific Level of all Plant Unit Installations at Receiver									27
BS4142 Acoustic Feature Corrections									
Tonality									
Impulsivity									
Intermittency									3
Total Rating Noise Level of all Plant Unit Installations at Receiver									30
rotal Nating Noise Level of all Flant Offic Histaliations at Receiver									30

Design Criterion	30

^{*}Tonality = +2 just perceptible, +4 clearly perceptible, +6 highly perceptible Impulsivity= +3 just perceptible, +6 clearly perceptible, +9 highly perceptible Intermittency = +3 if present

APPENDIX C



ANTI-VIBRATION MOUNTING SPECIFICATION REFERENCE DOCUMENT

1.0 General

- 1.1 All mountings shall provide the static deflection, under the equipment weight, shown in the schedules. Mounting selection should allow for any eccentric load distribution or torque reaction, so that the design deflection is achieved on all mountings under the equipment, under operating conditions.
- 1.2 It is the supplier's responsibility to ensure that all mountings offered are suitable for the loads, operating and environmental conditions which will prevail. Particular attention should be paid to mountings which will be exposed to atmospheric conditions to prevent corrosion.
- 1.3 All mountings shall be colour coded, or otherwise marked, to indicate their load capacity, to facilitate identification during installation.

Where use of resilient supports allows omission of pipe flexible connections for vibration/noise isolation, it shall be the Mechanical Service Consultant's or Contractor's responsibility to decide whether such devices are required to compensate for misalignment or thermal strain.

2.1 Type A Mounting (Caged Spring Type)

- 2.1.1 Each mounting shall consist of cast or fabricated telescopic top and bottom housings enclosing one or more helical steel springs as the principle isolation elements, and shall incorporate a built-in levelling device. The housing should be designed to permit visual inspection of the springs after installation, i.e. the spring must not be totally enclosed.
- 2.1.2 The springs shall have an outside diameter of not less than 75% of the operating height, and be selected to have at least 50% overload capacity before becoming coil-bound.
- 2.1.3 The bottom plate of each mounting shall have bonded to it a rubber/neoprene pad designed to attenuate any high frequency energy transmitted by the springs.
- 2.1.4 Mountings incorporating snubbers or restraining devices shall be designed so that the snubbing, damping or restraining mechanism is capable of being adjusted to have no significant effect during the normal running of the isolated machine.
- 2.1.5 All nuts, bolts or other elements used for adjustment of a mounting shall incorporate locking mechanisms to prevent the isolator going out of adjustment as a result of vibration or accidental or unauthorised tampering.

2.2 Type B Mounting (Open Spring Type)

- 2.2.1 Each mounting shall consist of one or more helical steel springs as the principal isolation elements, and shall incorporate a built-in levelling device.
- 2.2.2 The springs shall be fixed or otherwise securely located to cast or fabricated top and bottom plates, shall have an outside diameter of not less than 75% of the operating height, and shall be selected to have at least 50% overload capacity before becoming coil-bound.
- 2.2.3 The bottom plate shall have bonded to it a rubber/ neoprene pad designed to attenuate any high frequency energy transmitted by the springs.

APPENDIX C



2.3 Type C Mounting (Rubber/Neoprene Type)

Each mounting shall consist of a steel top plate and base plate completely embedded in oil resistant rubber/neoprene. Each mounting shall be capable of being fitted with a levelling device, and should have bolt holes in the base plate and a threaded metal insert in the top plate so that they can be bolted to the floor and equipment where required.

3.0 Plant Bases

3.1 Type A Bases (A.V. Rails)

An A.V. Rail shall comprise a steel beam with two or more height-saving brackets. The steel sections must be sufficiently rigid to prevent undue strain in the equipment and if necessary should be checked by the Structural Engineer.

3.2 Type B Bases (Steel Plant Bases)

Steel plant bases shall comprise an all-welded steel framework of sufficient rigidity to provide adequate support for the equipment, and fitted with isolator height saving brackets. The frame depth shall be approximately 1/10 of the longest dimension of the equipment with a minimum of 150 mm. This form of base may be used as a composite A.V. rail system.

3.3 Type C Bases (Concrete Inertia Base: for use with steel springs)

These shall consist of an all-welded steel pouring frame-work with height saving brackets, and a frame depth of approximately 1/12 of the longest dimension of the equipment, with a minimum of 100 mm. The bottom of the pouring frame should be blanked off, and concrete (2300 kg/m³) poured in over steel reinforcing rods positioned 35 mm above the bottom. The inertia base should be sufficiently large to provide support for all parts of the equipment, including any components which over-hang the equipment base, such as suction and discharge elbows on centrifugal pumps.