

Proposed Window/Door Schedule

Type	Quantity to Replace
W1	1
W2	1
W3	1
W4	1
W5	1
W6	1
W7	1
W8	1
W9	1
W10	1
W11	1
W12	1
W13	1
W14	1
D1	0
D2	1
Total	16


NOTES:

THE EXISTING SINGLE GLAZED TIMBER SASH AND CASEMENT WINDOWS ARE TO BE REPLACED LIKE-FOR-LIKE IN DOUBLE GLAZED TIMBER SASH AND CASEMENT WINDOWS TO THE FRONT OF THE PROPERTY. PLEASE SEE SECTIONS PROVIDED FOR FURTHER INFORMATION ON THE PROPOSED TIMBER WINDOWS ON DRAWING NO.S 6-7.

THE REAR WINDOWS ARE TO BE REPLACED WITH DOUBLE GLAZED PVCU WINDOWS. PLEASE SEE THE HERTIAGE SECTION PROVIDED ON DRAWING NO.8.

THE HORNS/GLAZING BARS ARE TO BE REPLACED TO MATCH EXISTING DESIGN AT THE FRONT AND REAR.

THE FRONT DOOR IS TO BE REPAIRED/RE-DECORATED ONLY AND THE REAR PATIO DOOR IS TO BE REPLACED LIKE FOR LIKE IN PVCU.

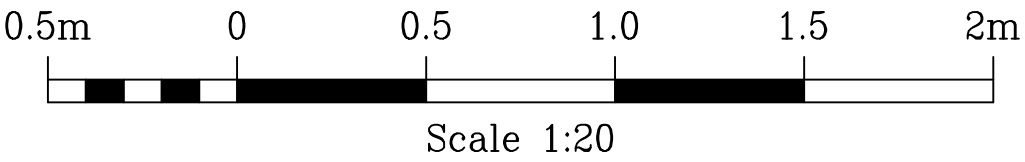

Rev.	Description	Date

Do not scale from this drawing. Dimensions to be verified on site by contractor prior to commencement of work.  
This drawing is the copyright of the practice and may not be reproduced in part or in whole without the prior written consent of the practice.  
© 2020 Faithorn Farrell Timms LLP

**Faithorn Farrell Timms**

Central Court  
1 Knoll Rise  
ORPINGTON  
Kent BR6 0JA  
T 01689 885080  
F 01689 885081

Client  
PA HOUSING

Project  
85 AGAR GROVE  
LONDON  
NW1 9UE

Drawing Title  
PROPOSED WINDOW  
AND DOOR SCHEDULE

Date  
06/01/21

Scale  
1:20 @ A1

Drawn By  
EK

Checked By  
JM

Project No.  
T1-5387

Drawing No.  
5

Rev.