


RENDER SKIM TO CEILING RE-PAINTED LUMINAIRES REPLACED CONTROL / ALARM PANELS REMOVED / RELOCATED TO CUPBOARD WHERE POSSIBLE (FIRE ALARM TO REMAIN) 06 FLOORING REPLACED

2. CORRIDOR LOOKING TOWARDS MAIN ENTRACE



4. CONTROL ROOM 3. CLEANER'S STORE

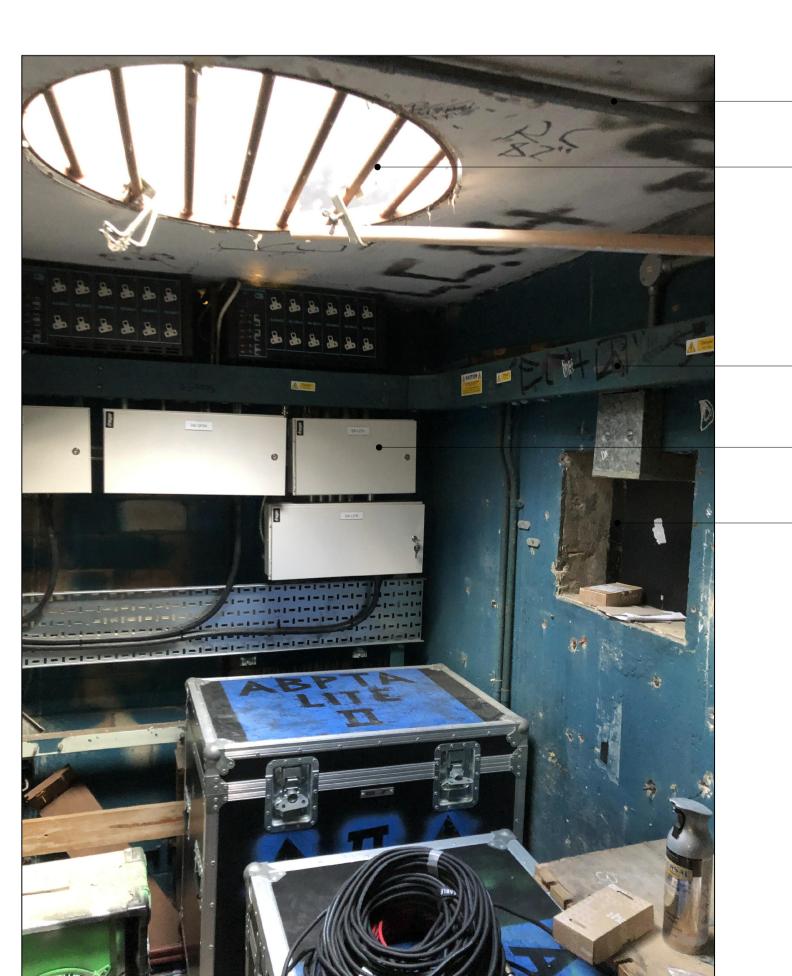

CONDUITS REMOVED

WALLS, SOFFIT AND METALWORK REPAINTED (ROOFLIGHT RETAINED)

TRUNKING / CONTAINMENT REMOVED

ELECTRICAL DISTRIBUTION **BOARDS RELOCATED** WALL BEHIND REMOVED

OPENING ENLARGED TO FORM SERVERY COUNTER

DO NOT SCALE

THE CONTRACTOR IS TO CHECK AND VERIFY ALL BUILDING AND SITE DIMENSIONS, LEVELS AND SEWER INVERT LEVELS AT CONNECTION POINTS BEFORE WORK STARTS.

THIS DRAWING IS TO BE READ AND CHECKED IN CONJUNCTION WITH ENGINEERS AND OTHER SPECIALIST DRAWINGS.


THE DRAWING AND THE WORKS DEPICTED ARE THE COPYRIGHT OF REED WATTS ARCHITECTS AND MAY NOT BE REPRODUCED EXCEPT BY WRITTEN PERMISSION.

GENERAL WORKS

- 1. DOORS retained and refurbished with new paint finish, acoustic seals and kick
- 2. CONCRETE lightly cleaned to remove
 - worst of dirt
- 3. CONCRETE paint removed
 4. CONCRETE local damage made good
 5. HOLES IN RC WALLS infilled and missing timber lining replaced
- 6. TIMBER LININGS Repaired where damaged / missing e.g. by previous
- services installations 7. ADHESIVE MAGNETIC STRIPS -
- removed and timber cleaned 8. ALL LIGHT FITTINGS AND CONDUIT -
- removed and replaced 9. H/L TRUNKING - removed and replaced with containment concealed behind
- timber lining 10. SKIRTING BOARD - repaired and repainted
- 11. WATER DAMAGE concrete cleaned and timber replaced
- 12. FLOORING / STAGING reconfigured and finishes replaced (refer to plans)
- 13. EXISTING ELECTRICAL FITTINGS removed along with associated

containment

- 16. AUDITORIUM AV EQUIPMENT replaced
- 17. FOIL LAGGED PIPES concealed or lagging removed
- 18. LIGHTING BARS removed
- 19. DEMOLITION new hole formed for door to control room
- 20. DEMOLITION existing hole extended
- for new servery counter 21. VENTILATION - system replaced, new
- louvres installed 22. REDUNDANT STAGE EQUIPMENT -
- removed
- 23. BLACKOUT BLINDS replaced with new motorised blinds installed

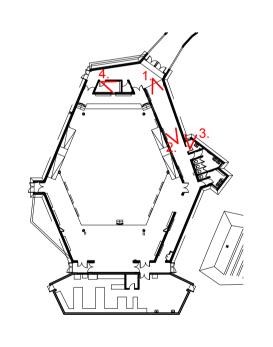

)2	26.03.21	PLANNING
)1	15.02.21	STAGE 3 FOR COSTING
E\/	DATE	DESCRIPTION

www.reedwatts.com studio@reedwatts.com

PROJECT 2001 ACLAND BURGHLEY

Existing Building Annotated photos

REVISION

2001(0)047 1:25 @ A1 1:50 @ A3 24.03.21

PLANNING