




L6 Terrace (west)

Continued below: L6 Terrace (east)

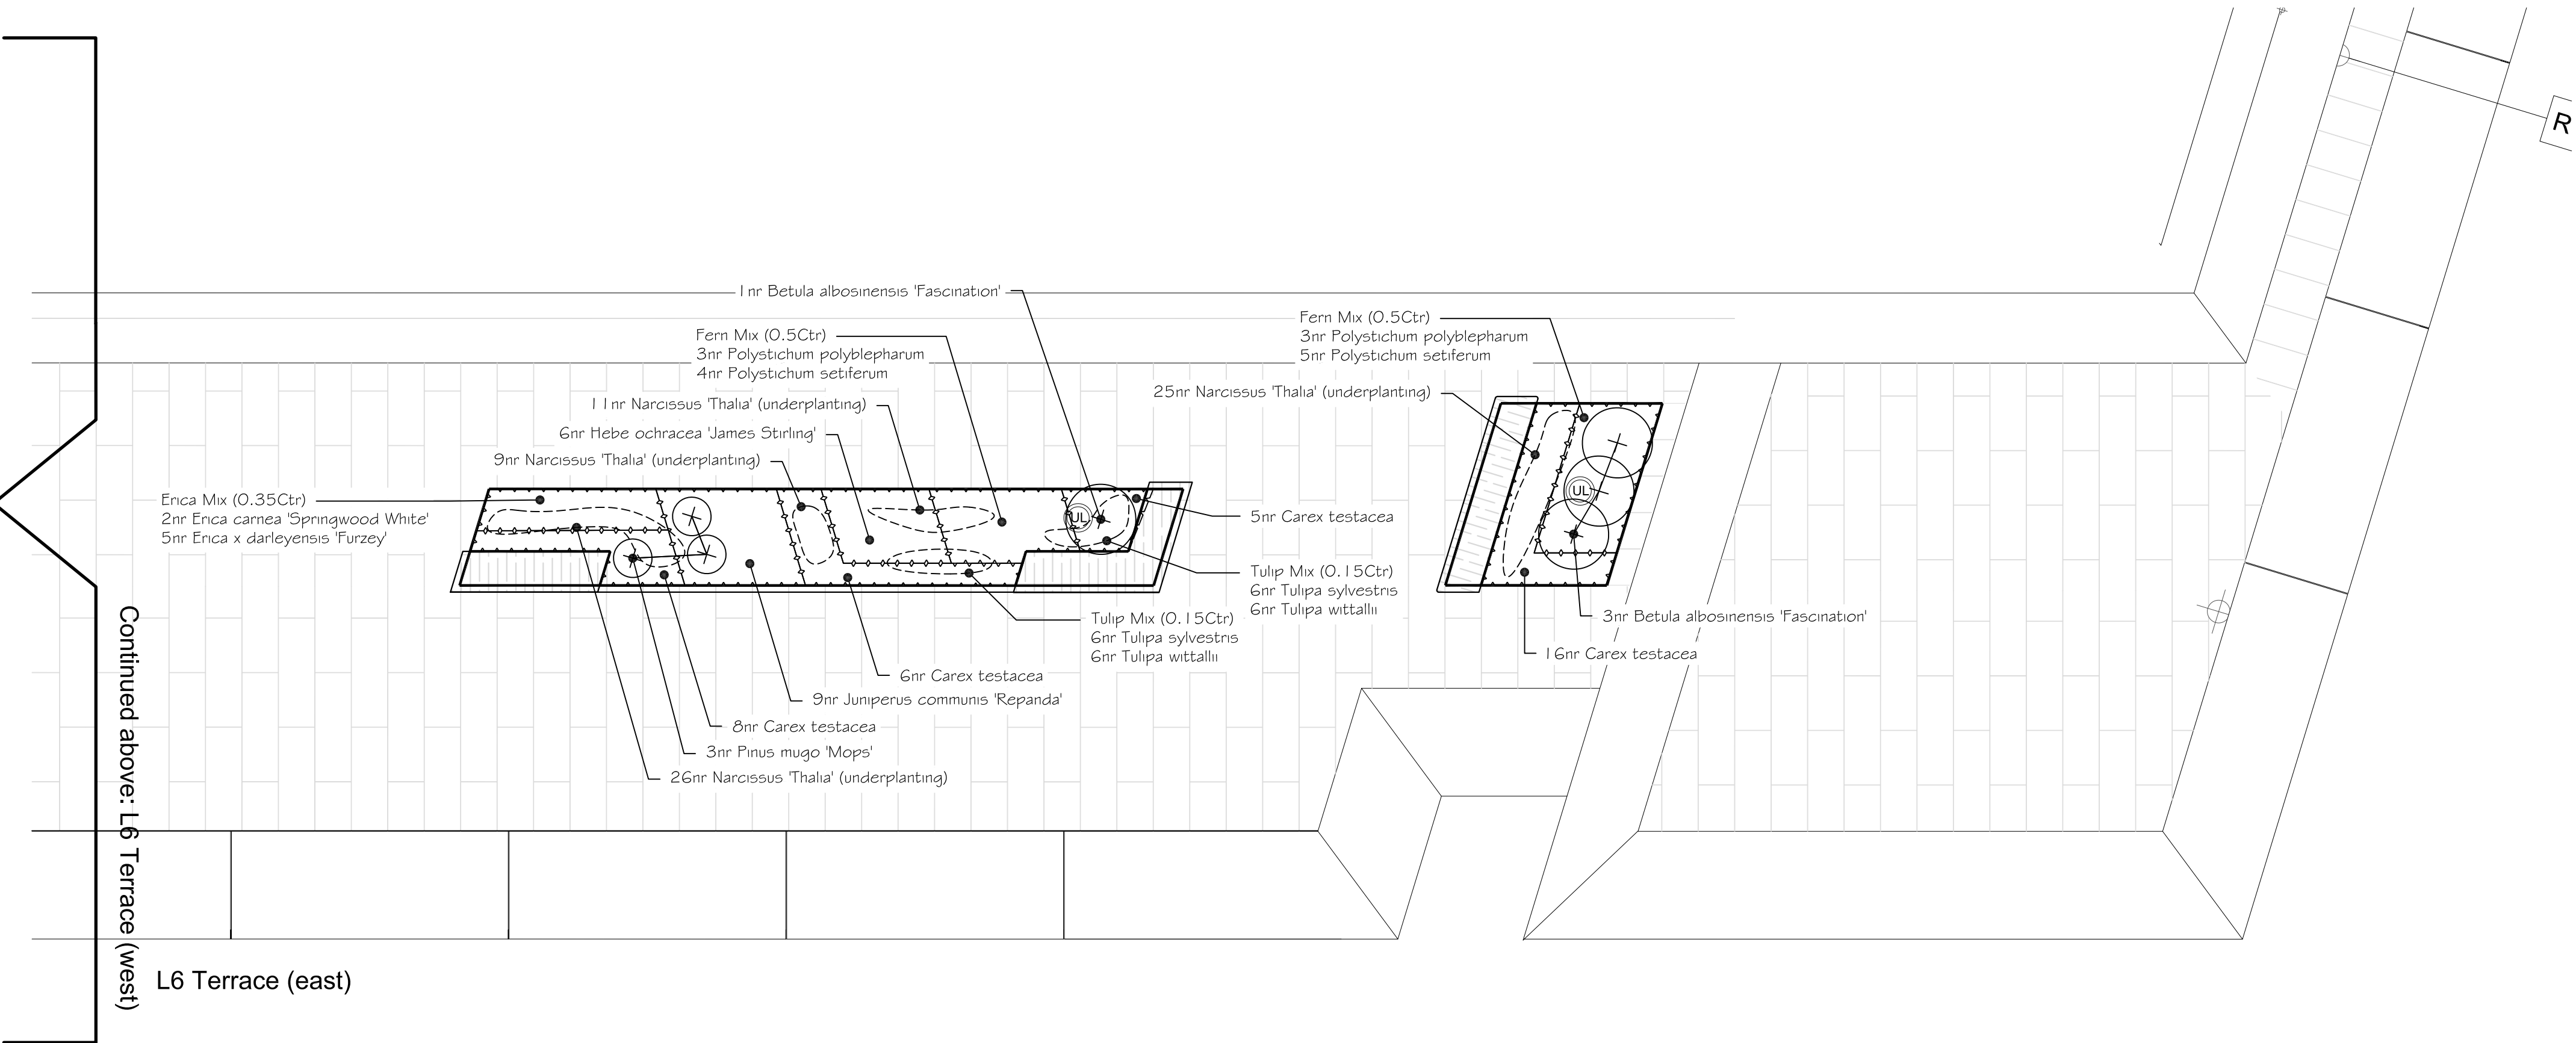

Continued above: L6 Terrace (west)

L6 Terrace (east)

Key

- Shrubs, perennials, grasses planting
- Spot trees / shrubs
- Bulb underplanting

Planting revised to suit amended terrace layout, biodiversity enhancements added to layout

Revision Number By Date



Project
Stephenson House, Camden


Drawing
Detailed Planting -
L6 Terrace

Status
CONSTRUCTION

Do not scale off drawing. All dimensions & Levels are to be checked on site. Any discrepancies must be reported to the landscape architect immediately.
Copyright THE LANDSCAPE PARTNERSHIP LTD

Bedford	01234 261315	☐
Woodbridge	01394 380509	☒
London	020 7252 0002	☐
Norwich	01603 230777	☐

Job No.	17412
Dwg. No.	17412-TLP-460
Scale	1:50@A1
Drawn	LH
Checked	LW
Date	18-12-2018

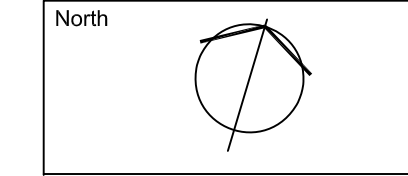

- NOTES:
- REFER TO DETAILED PLANTING - SCHEDULE L6 (L17412-TLP-SchL6)
- All planting is specified to be carried out between the months of November and March. If planting is carried out outside this season, the specification should be changed to container grown plants only.
 - Surface Mulching to all plant beds shall be 25mm depth of LECA mulch, free from fungus, disease and debris.
 - In order to comply with DEFRA guidance: All plant stock to be either propagated from seed in the UK or grown in the UK for a minimum 12 months
 - Plant mixes: plants to be grouped in 2s and 3s of the same plant to create naturalistic groupings