













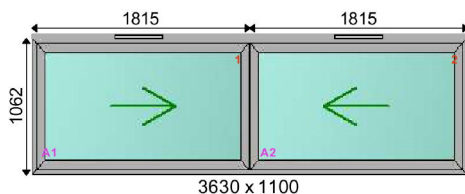
		Quotation SUPPLIED & FITTED		Perfect Crystal Windows Ltd 
Customer Details :-  TEL:  MOBILE:  EMAIL: 		Delivery Details :-  TEL:  MOBILE:  EMAIL: 		Quote No :  Quote Date :  Reference :  Sales Rep :  Created by : 
Item No: 1	Qty: 1	Ali - Sliding 2Track - RAL	Location: ITEM 1	Living back

VIEWED FROM OUTSIDE

**Dimensions:**

Overall Size: 3630 x 1100

Actual Size: 3630 x 1062

Glazing:

4/20/4 Clear OptiWhite Tuff K SwissV Spacer Grey ARGON Hotmelt BI

Specification:

Handle: Std handle Black
 Lock: Multipoint Lock
 Frame Finish Ext: ANODISED Silver
 Frame Finish Int: NONE
 Cill: Front Cill 60mm
 Cylinder: Standard Cylinder

Additional:

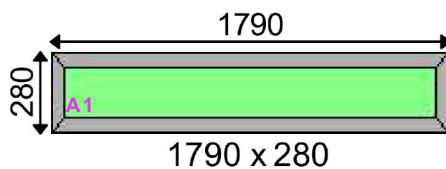
Outer Frame: Two rail frame ANODISED Silver with Central
 38mm Addon Double Track for trickle vents Top
 4000 Trickle Vent - Anodised

Service:

INSTALLATION Included
 Disposal old products - included
 FINISHING Outside - Included (Render or Silicone)
 FINISHING Inside - Included (Aluminium Trims)
 Windowboard - NOT included
 INSTALLATION Included

Item No: 2	Qty: 1	Ali - Fixed Casement - RAL	Location: Flag 1:1:1	top living back
-------------------	---------------	-----------------------------------	-----------------------------	------------------------

VIEWED FROM OUTSIDE

**Dimensions:**

Overall Size: 1790 x 280

Actual Size: 1790 x 280

Glazing:

4/20/4 Clear OptiWhite Tuff K SwissV Spacer Grey ARGON Hotmelt MIH

Specification:

Frame Finish Ext: ANODISED Silver
 Frame Finish Int: ANODISED Silver
 Cill: No Cill

Additional:

Outer Frame: Balcony Frame Hi-ANODISED

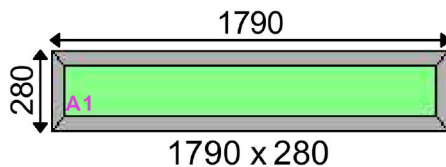
Service:

INSTALLATION Included
 Disposal old products - included
 FINISHING Outside - Included (Render or Silicone)
 FINISHING Inside - NOT included
 Windowboard - NOT included

Your sales contact is  Call us on  and quote reference 

Item No: 3	Qty: 1	Ali - Fixed Casement - RAL	Location: Flag 1:2:1	top living back
------------	--------	----------------------------	----------------------	-----------------

VIEWED FROM OUTSIDE

**Dimensions:**

Overall Size: 1790 x 280 Actual Size: 1790 x 280

Glazing:

4/20/4 Clear OptiWhite Tuff K SwissV Spacer Grey ARGON Hotmelt MIH

Specification:

Frame Finish Ext: ANODISED Silver

Frame Finish Int: ANODISED Silver

Cill: No Cill

Additional:

Outer Frame: Balcony Frame Hi-ANODISED

Service:

INSTALLATION Included

Disposal old products - included

FINISHING Outside - Included (Render or Silicone)

FINISHING Inside - NOT included

Windowboard - NOT included

Payment Terms	
<p>This quotation is valid for 30 days from 16/06/2021 .</p> <p>Prices are based on the above specification, any extras or changes might effect the price. If any details or extras are missing in this document, please do not sign.</p> <p>Order details include price are subject to site survey.</p> <p>Perfect Crystal Windows Limited is authorised and regulated by the Financial Conduct Authority. We are a credit broker and not a lender and offer credit facilities from a panel of lenders/from one lender. Our terms and conditions for sale of goods are available on request or online at [REDACTED]</p> <p>Company Reg No. [REDACTED]</p>	<p>Total Nett Ex. VAT [REDACTED]</p> <p>VAT @ 20.0% [REDACTED]</p> <p>TOTAL [REDACTED]</p>

Site Survey and Installation

PCW Ltd will carry out a site survey and installation. This has been included in the price.

No allowance has been made for specialist lifting or access equipment. Should this be a requirement we will advise post survey.

Parking costs are not included (additional charge may apply). Customer will need to provide a parking permit.

Estimated lead times

Site survey and admin 1 week (commence once deposit is paid and order is accepted)

Manufacture **6 - 8 Weeks** (commence once survey completed, all details confirmed and order is signed)

Booking Installation 2 weeks (commence once manufacture is completed and passed QC)

All estimated lead times quoted are approximate and exclude factory shutdown .

Lead time are for guide purpose only and shall not be of the essence of this contract.

Payment Terms

Initial deposit of [REDACTED] due on order

Final balance of [REDACTED] due prior booking Installation

Bank Details

[REDACTED]

Acceptance of Order

Please check your quotation carefully and ensure all details are correct to your requirements.

Once the deposit payment of [REDACTED] is received this quotation will be processed as an order.

You will be contacted to arrange your survey. On completion of survey Order Confirmation will be provided for your signature of approval. For further information please refer to our full Terms and Conditions at perfectcrystal.co.uk/terms

Your sales contact is [REDACTED] Call us on [REDACTED] and quote reference [REDACTED]