


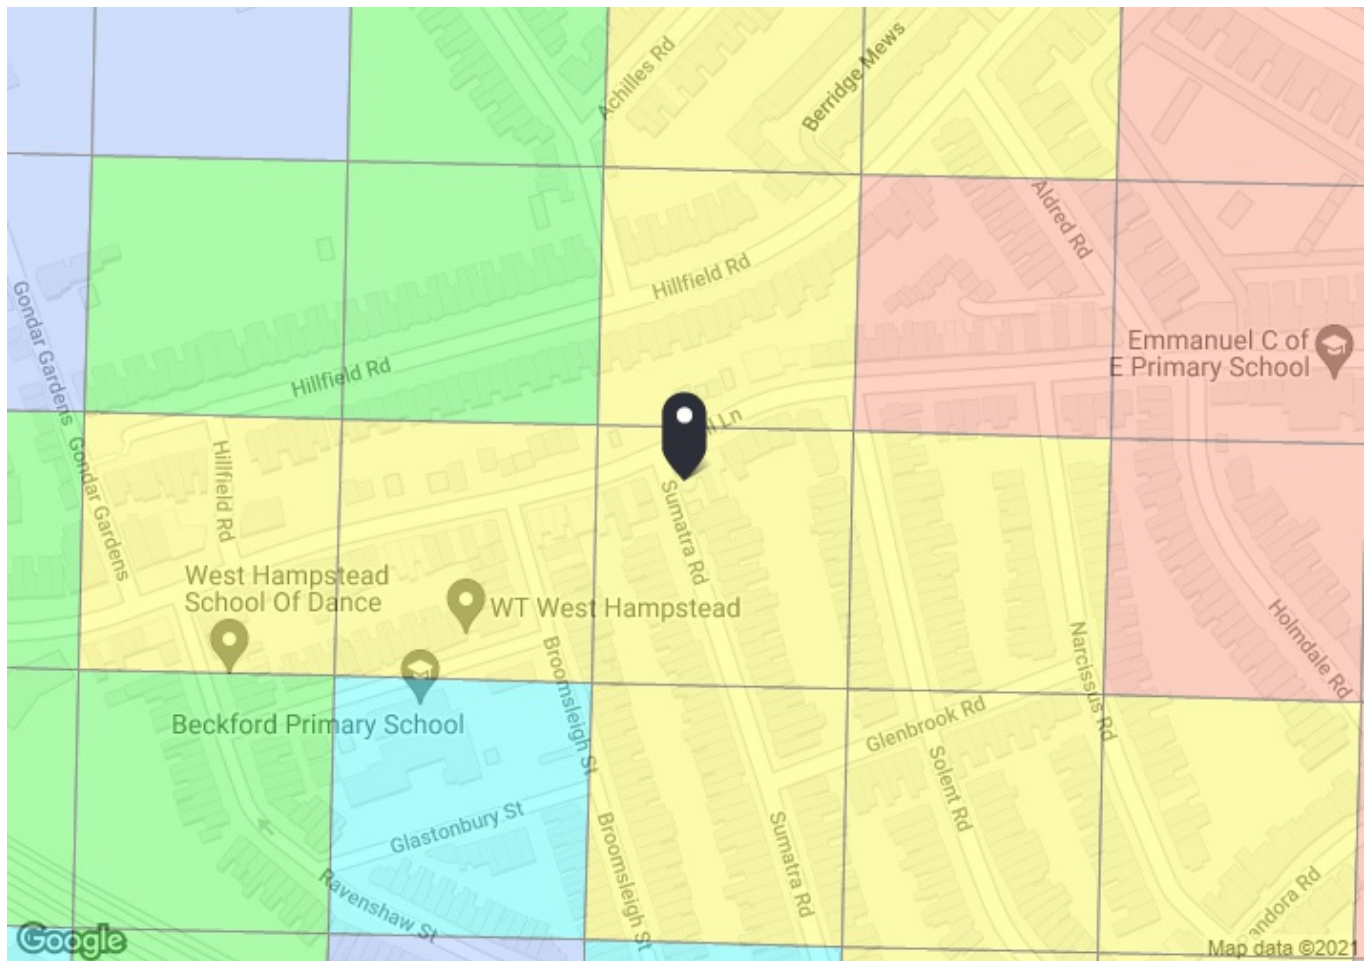


PTAL output for Base Year 4

NW6 1NF
Mill Ln, London NW6 1NF, UK
Easting: 525031, Northing: 185173

Grid Cell: 104720

Report generated: 17/08/2021

Map key - PTAL



Map layers

 PTAL (cell size: 100m)

Calculation Parameters

Day of Week	M-F
Time Period	AM Peak
Walk Speed	4.8 kph
Bus Node Max. Walk Access Time (mins)	8
Bus Reliability Factor	2.0
LU Station Max. Walk Access Time (mins)	12
LU Reliability Factor	0.75
National Rail Station Max. Walk Access Time (mins)	12
National Rail Reliability Factor	0.75

Calculation data

Mode	Stop	Route	Distance (metres)	Frequency (vph)	Walk Time (mins)	SWT (mins)	TAT (mins)	EDF	Weight	AI
Bus	WEST END GREEN	139	534.15	7.5	6.68	6	12.68	2.37	0.5	1.18
Bus	FORTUNE GN R HILLFIELD R	328	513.98	9	6.42	5.33	11.76	2.55	0.5	1.28
Bus	MILL LASUMATRARD	C11	168.47	7.5	2.11	6	8.11	3.7	1	3.7
Rail	West Hampstead	'CLPHMJ2-STFD 2L50'	833.18	3.67	10.41	8.92	19.34	1.55	1	1.55
Rail	West Hampstead	'STFD-CLPHMJ2 2Y11'	833.18	3.67	10.41	8.92	19.34	1.55	0.5	0.78
LUL	West Hampstead	'WembleyPark-Stratfo'	917.55	3.67	11.47	8.92	20.39	1.47	0.5	0.74
LUL	West Hampstead	'WillesdenGreen-Stra'	917.55	4.33	11.47	7.68	19.15	1.57	0.5	0.78
LUL	West Hampstead	'Stanmore-Stratford'	917.55	17.65	11.47	2.45	13.92	2.16	1	2.16
Rail	West Hampstead	'BEDFDM-SUTTON 1O13'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'STALBCY-SVNOAKS 2E11'	694.59	1	8.68	30.75	39.43	0.76	0.5	0.38
Rail	West Hampstead	'BEDFDM-SVNOAKS 2E19'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'LUTON-SVNOAKS 2E21'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'STALBCY-SVNOAKS 2E95'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-LUTON 2O00'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-BEDFDM 2O04'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-STALBCY 2O06'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-LUTON 2O10'	694.59	1	8.68	30.75	39.43	0.76	0.5	0.38
Rail	West Hampstead	'LUTON-SUTTON 2O17'	694.59	0.67	8.68	45.53	54.21	0.55	0.5	0.28
Rail	West Hampstead	'STALBCY-SUTTON 2O21'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'STALBCY-SUTTON 2O29'	694.59	0.67	8.68	45.53	54.21	0.55	0.5	0.28
Rail	West Hampstead	'LUTON-BCKNHMJ 2S91'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'STALBCY-BROMLYS 2S93'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'BRGHTN-BEDFDM 2T02'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'BRGHTN-BEDFDM 2T04'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-STALBCY 2V02'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-STALBCY 2V08'	694.59	0.67	8.68	45.53	54.21	0.55	0.5	0.28
Rail	West Hampstead	'BEDFDM-SUTTON 2V15'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SUTTON-BEDFDM 2V16'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'LUTON-SUTTON 2V19'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'STALBCY-SUTTON 2V27'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'LUTON-SUTTON 2V31'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'ORPNGTN-STALBCY 2D93'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'ORPNGTN-LUTON 2D95'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SVNOAKS-STALBCY 2E59'	694.59	0.67	8.68	45.53	54.21	0.55	0.5	0.28
Rail	West Hampstead	'SVNOAKS-LUTON 2E61'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'SVNOAKS-WHMPSTM 2E63'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15
Rail	West Hampstead	'BROMLYS-LUTON 2E93'	694.59	0.33	8.68	91.66	100.34	0.3	0.5	0.15

Total Grid Cell AI: 17.5