

THIS DRAWING MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT.
DO NOT SCALE FROM THIS DRAWING.
THIS DRAWING IS COPYRIGHT. ©

GENERAL NOTES

1. CABINET TO BE LOCKABLE
2. WIRING TO BE COMPLETED IN CAT 6
3. BROADBAND CONNECTION TO BE PROVIDED TO CABINET CCTV IS STORED ON CLOUD.
4. ALL CAMERAS TO BE DOME.
5. CCTV TO BE INSTALLED TO NSI NCP 104 ISSUE 3 & BS EN 62676-4:2015
6. CLOUD STORAGE TO BE BASED ON 30 DAYS & BE VIEWED BY EAGLE CLOUD VMS

ROOF


THIRD FLOOR

SECOND FLOOR

FIRST FLOOR

GROUND FLOOR

BASEMENT

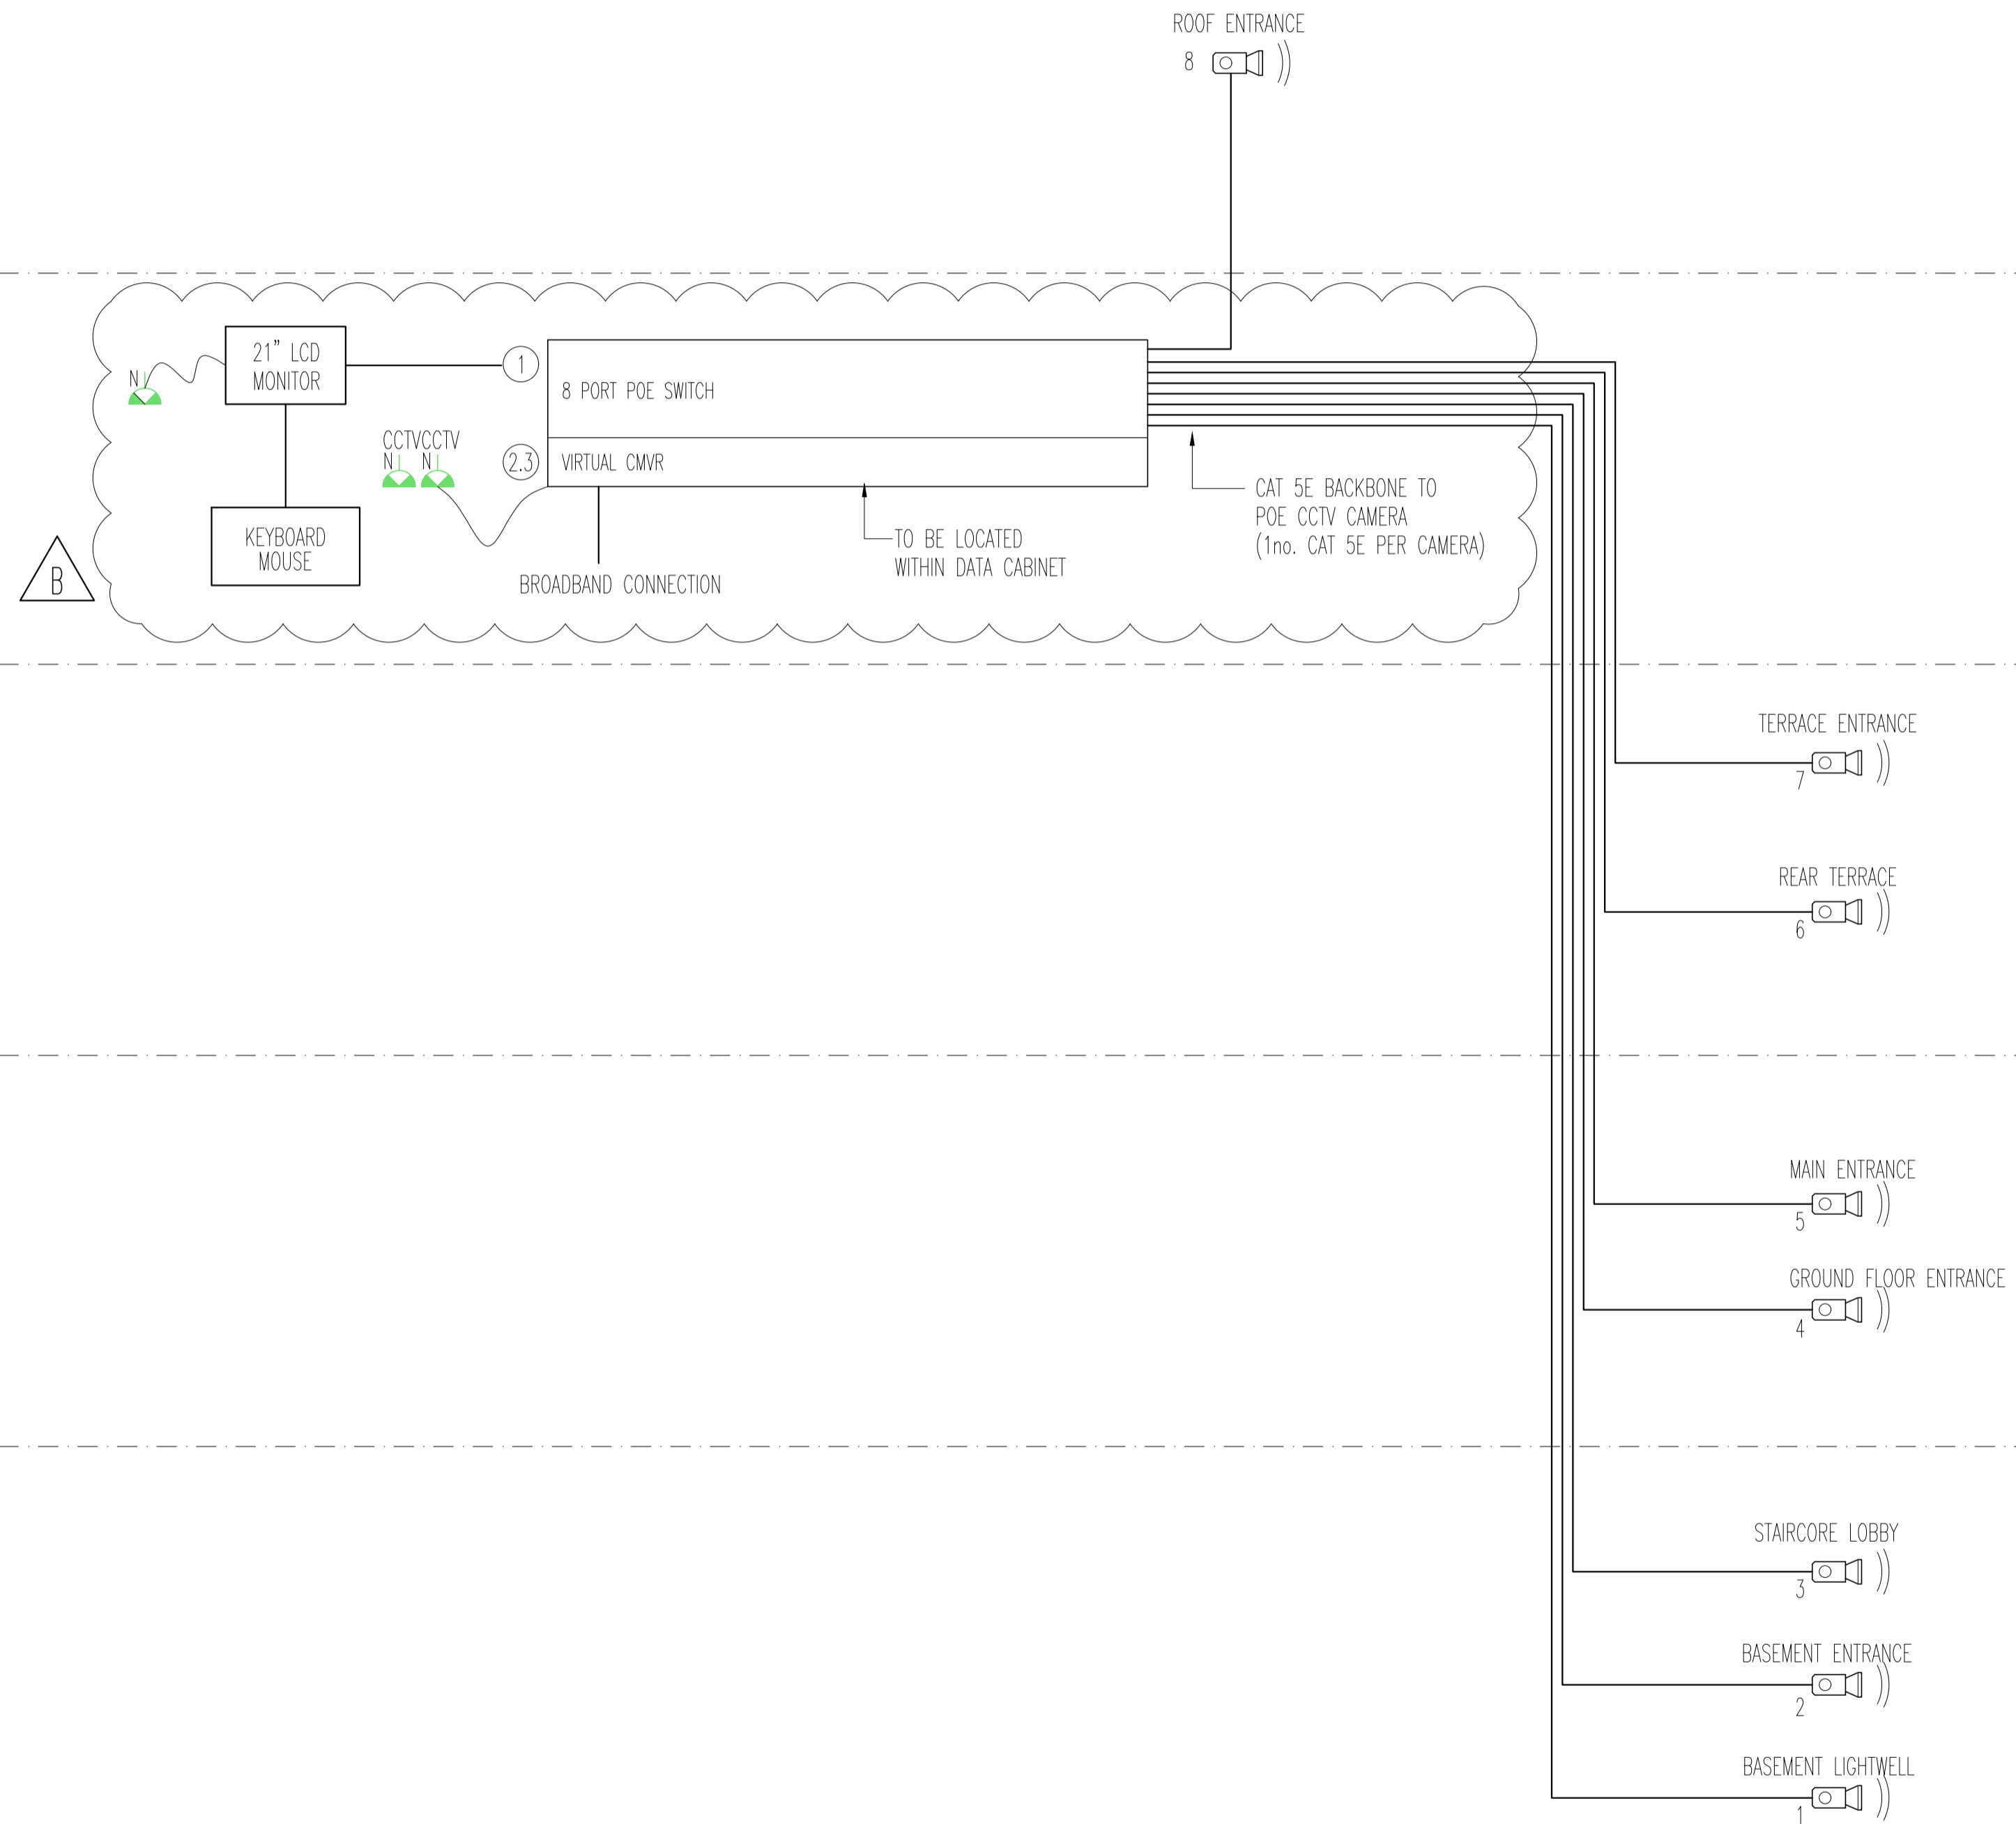

NO SERVICES SHALL BE RUN ON SURFACE/EXPOSED AND MINI TRUNKING SHALL NOT BE INSTALLED IN ANY ROOM.

ALL SERVICES RUNS TO BE REVIEWED ON SITE FOLLOWING STRIP OUT AND OPENING UP.

NEW SERVICE ROUTES TO BE INSTALLED WITHIN EXISTING BUILDERS WORK & UTILISED WHEREVER POSSIBLE.

STAGE 4

Rev	Date	Description
B	AUG.21	COMMENTS INCORPORATED
A	APR.21	REVISED TO SUIT UPDATED BACKGROUNDS
0	JUN.19	STAGE 4 ISSUE

TPS.
Taylor Project Services LLP

No.1 Cornhill
London EC3V 3ND
Tel 020 7743 6602
www.taylorprojectservices.com

Project
30 PERCY STREET
LONDON

Drawing Title
ELECTRICAL SERVICES
CCTV SCHEMATIC

Scale	N.T.S.	Date	31.01.19
Drawn	C.A.D.	Checked	M.G.
Drawing Status STAGE 4			
Revision	0	A	B
Drawing No. TPS/30PS/CCTV			