

GENERAL NOTES

- 1. CABINET TO BE LOCKABLE
- 2. WIRING TO BE COMPLETED IN CAT 6A
- 3. BROADBAND CONNECTION TO BE PROVIDED TO CABINETS
- 4. ALL INCOMING LINES TO BE LINKED TO SURGE PROTECTION
- 5. CASTORS TO BE PUT ON CABINETS
- 6. SPACING BETWEEN PATCH PANELS TO BE PROVIDED FOR VENTILATION

ROOF


THIRD FLOOR

SECOND FLOOR

FIRST FLOOR

GROUND FLOOR

BASEMENT

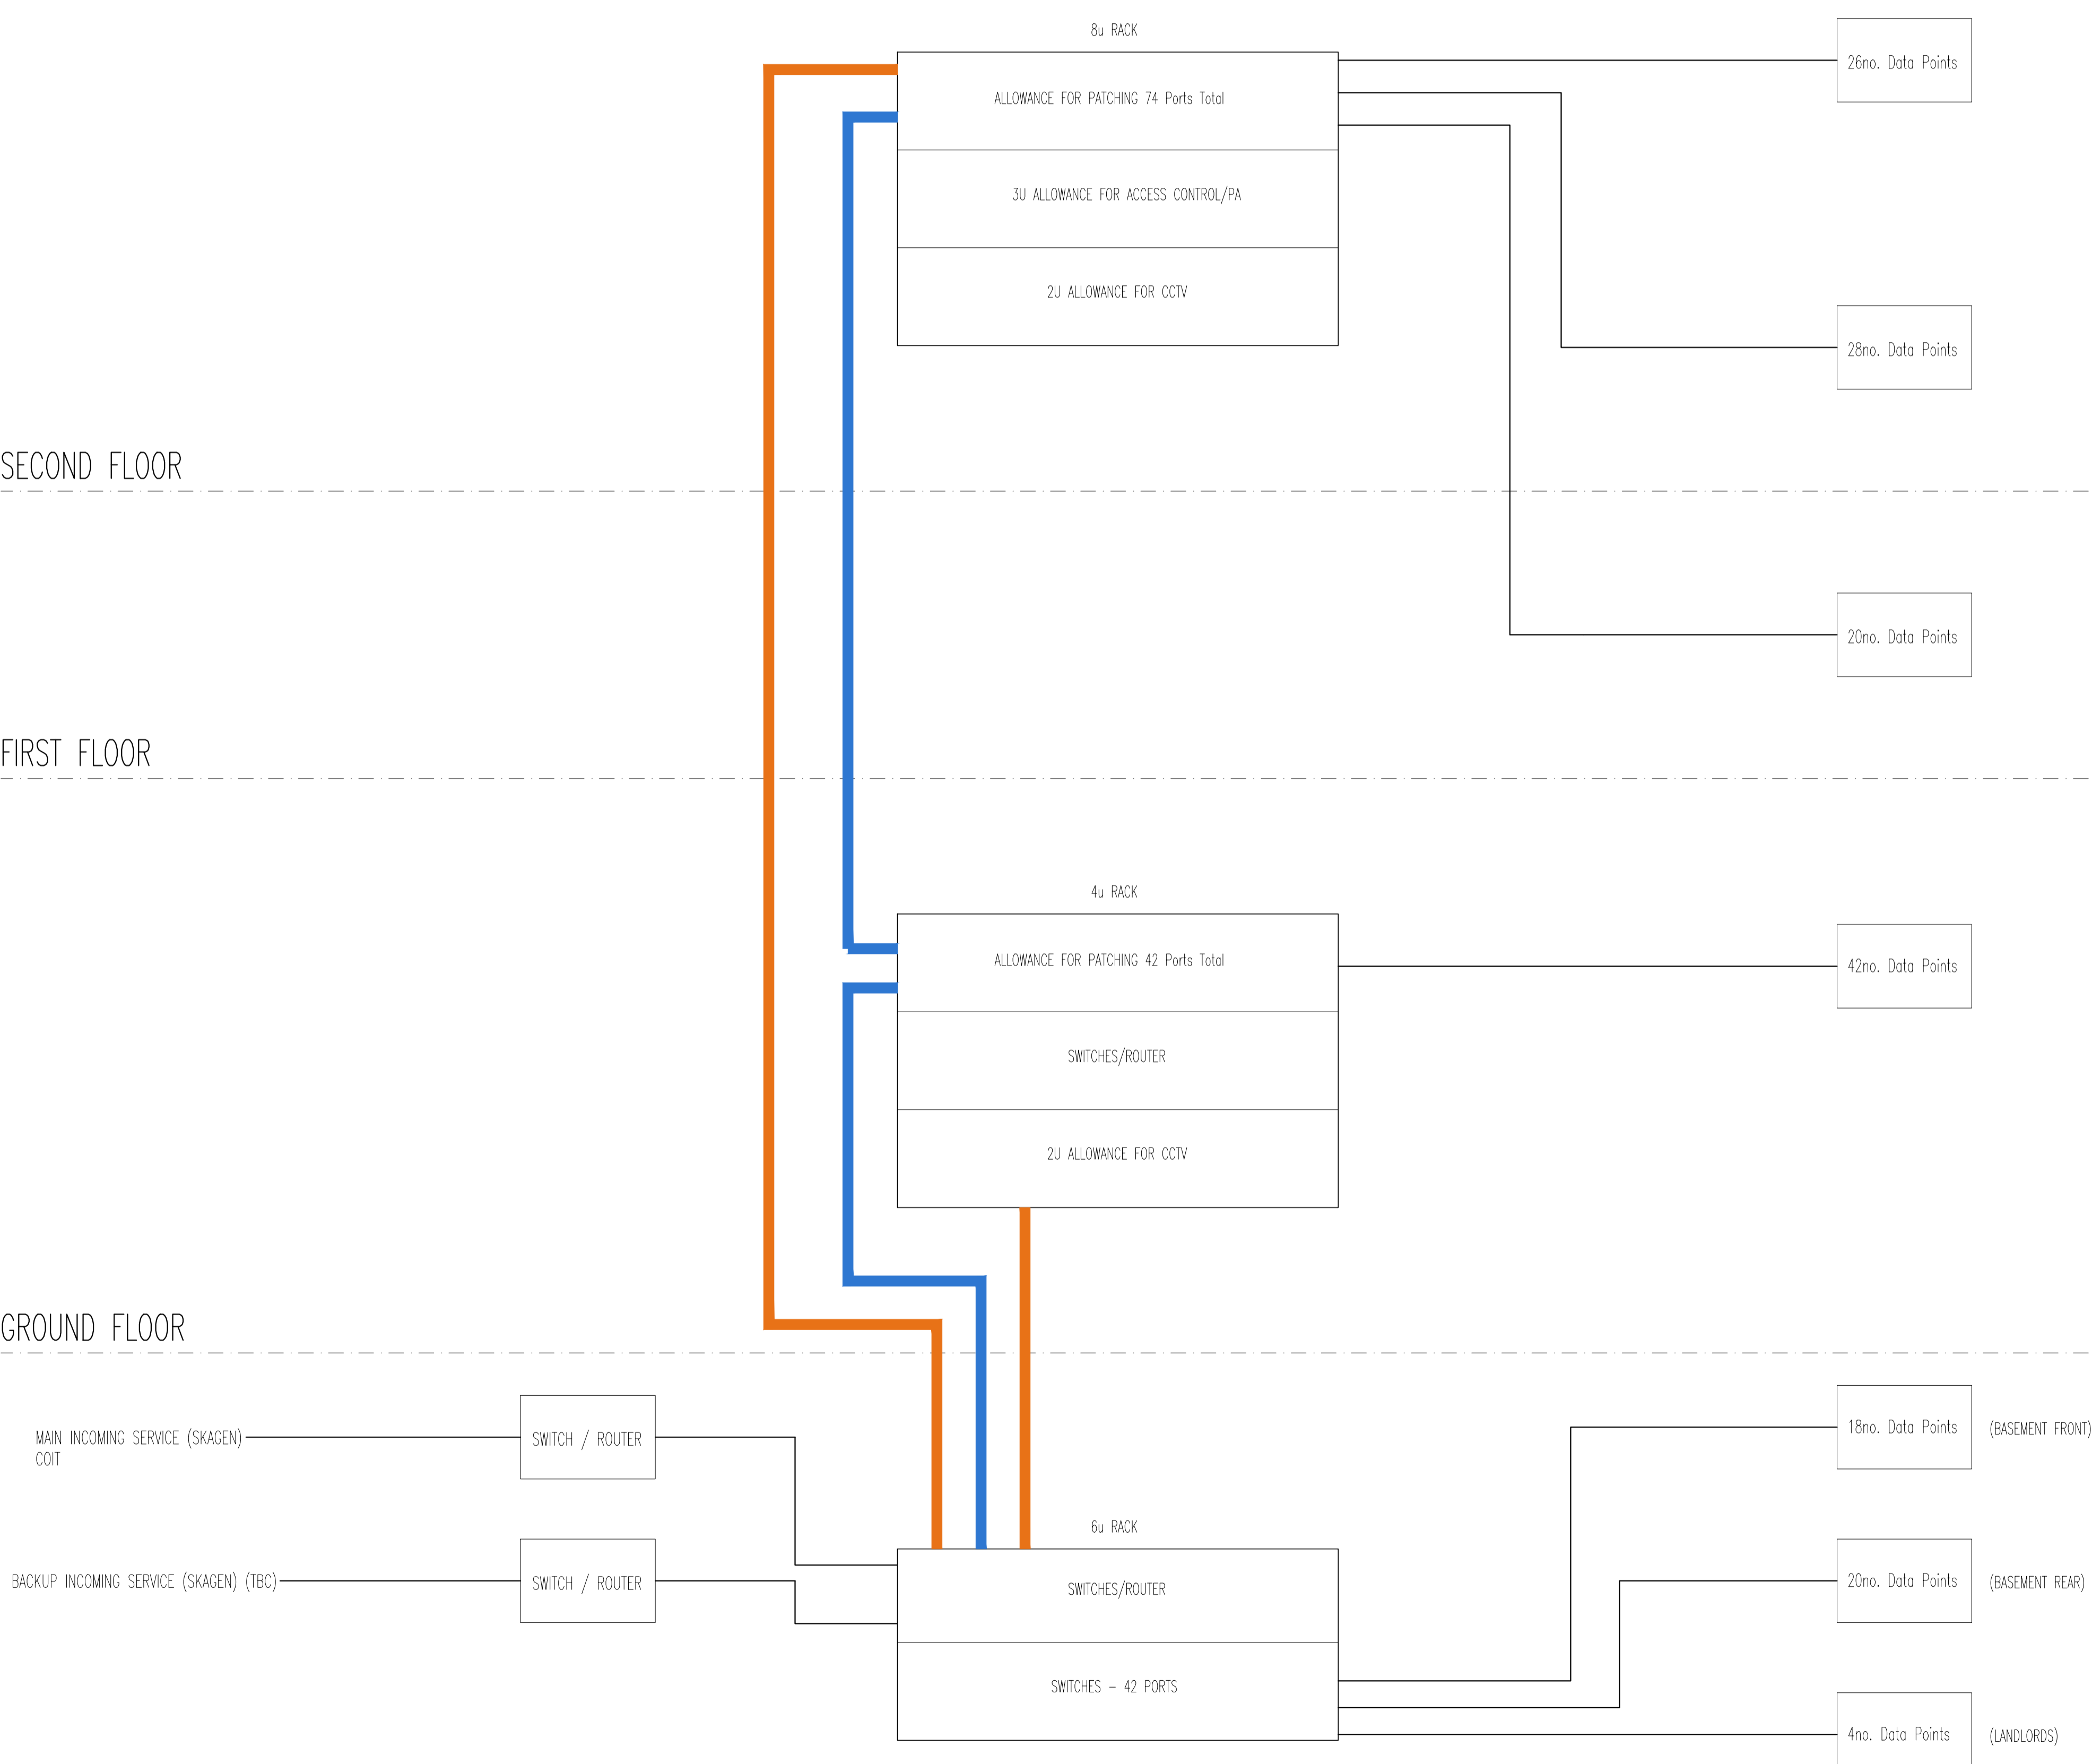

NO SERVICES SHALL BE RUN ON SURFACE/EXPOSED AND MINI TRUNKING SHALL NOT BE INSTALLED IN ANY ROOM.  
ALL SERVICES RUNS TO BE REVIEWED ON SITE FOLLOWING STRIP OUT AND OPENING UP.  
NEW SERVICE ROUTES TO BE INSTALLED WITHIN EXISTING BUILDERS WORK & UTILISED WHEREVER POSSIBLE.

STAGE 4

Rev	Date	Description
B	AUG.21	COMMENTS INCORPORATED
A	APR.21	REVISED TO SUIT UPDATED BACKGROUNDS
0	JUN.19	STAGE 4 ISSUE

**TPS.**  
Taylor Project Services LLP  
No.1 Cornhill  
London EC3V 3ND  
Tel 020 7743 6602  
www.taylorprojectservices.com

Project  
30 PERCY STREET  
LONDON

Drawing Title  
PROPOSED ELECTRICAL  
DATA SCHEMATIC

Scale	N.T.S.	Date	28.11.18
Drawn	C.A.D.	Checked	M.G.

Drawing Status  
STAGE 4

Revision	0	A	B																
----------	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Drawing No.  
TPS/30PS/IT