





Indicative Scope of Works

7 CENTENARY BUSINESS PARK, STATION ROAD, HENLEY-ON-THAMES, OXFORDSHIRE RG9 1DS. 01491 411277 ISSUED ONLY FOR THE PURPOSE INDICATED. THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL CONSULTANTS INFORMATION. ALL DIMENSIONS TO BE CHECKED ON SITE. THIS DRAWING IS COPYRIGHT. REV. ISSUED DESCRIPTION

DRAWN CHECKED

## GENERAL NOTES

All base information and drawings have been taken from survey drawings by Plowman Craven. All dimensions are to be checked on site by the contractor and any discrepancies reported to the architect. Proposals subject to listed building consents.

All drawings to be read in conjunction with all information: - Plans & Elevations

- Schedule of Works

All works subject to Contract Administrator and Local Authority consents.

All repair/replacement to exactly match existing surrounding location in every way.

Complementary external works for 20-22 Southampton Place and 46-47 Bloomsbury Square are covered under applications 2021/5686/P and 2021/6112/L.

Only high level works indicated are those visible from ground; full extent of works subject to full access.

See S+P Schedule of Work for details of Item nos. below.

General works:

- Clean all parts of all walls (including rendered), roofs, gutters etc. to 1.1.5 in addition to notes otherwise.
- Repaint all painted masonry and decorative elements to 5.4.1 unless noted otherwise.
- Repaint <u>all</u> painted timber elements to 5.4.3 unless noted otherwise.
- Repaint all rainwater pipes, railings, metal stairs and other metal elements to 5.4.4 unless noted otherwise.
- Remove all metal window security bars (cutting fixings if
- unavoidable), repaint as 5.4.4 and re-secure in place.Making good of fabric associated with the upgrading of

existing external services allowed for elsewhere. KEY
<u>1 MASONRY WORKS</u> + + + + 1.1 Cleaning Masonry 1.2 Repairing Masonry 1.2.1 Resin repair 1.2.2 Replacing elements 1.3 Repointing 1.3.1 Standard pointing 1.3.2 Tuck pointing



- 3.1 Adjust flat roof substrate to eliminate pooling 3.2 Remove board
- 3.3 Remove felt lining and make good

4 ROOFING WORKS

- 4.1 Tiled incl. renewal of lead flashings
- 4.2 Slated incl. renewal of lead flashings4.3 Lead incl. renewal of lead flashings
- 4.4 Lead Flashings only
- 4.5 Asphalt incl. renewal of lead flashings
- 4.6 Felt incl. renewal of lead flashings
- 4.7 Cleaning flat roofs/ balconies


5 SURFACE FINISHES


- 5.1 Unprofiled Render (walls, plinths etc.) 5.1.1 <20mm crack width & <30mm depth 5.1.2 New and repairs >20x20mm
- 5.2 Profiled Render (cornices etc.)
- 5.3 Tile grouting
- 5.4 Painting
  - 5.4.1 Masonry paint
  - 5.4.2 Masonry paint breathable
  - 5.4.3 Joinery paint 5.4.4 Metalwork paint
- 6 OTHER WORKS

6.2 Metal drainage goods



- 6.2.3 Replace
- 6.3 Replacement glazing

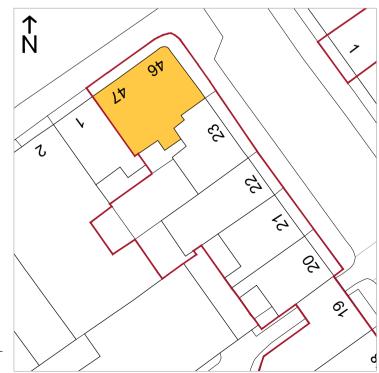



PROJECT HOLBORN LINKS External Works 20-22 SP & 46-47 BS

CLIENT

EDR

DESCRIPTION 46-47 BS PROPOSED GROUND FLOOR PLAN

date	SCALE AT A1	ло
MAR. '22	1:50	2
STATUS		DF
PRELIMINARY		F
drawn JO	CHECKED	

2.963	
	&

