




EXISTING FRONT ELEVATION

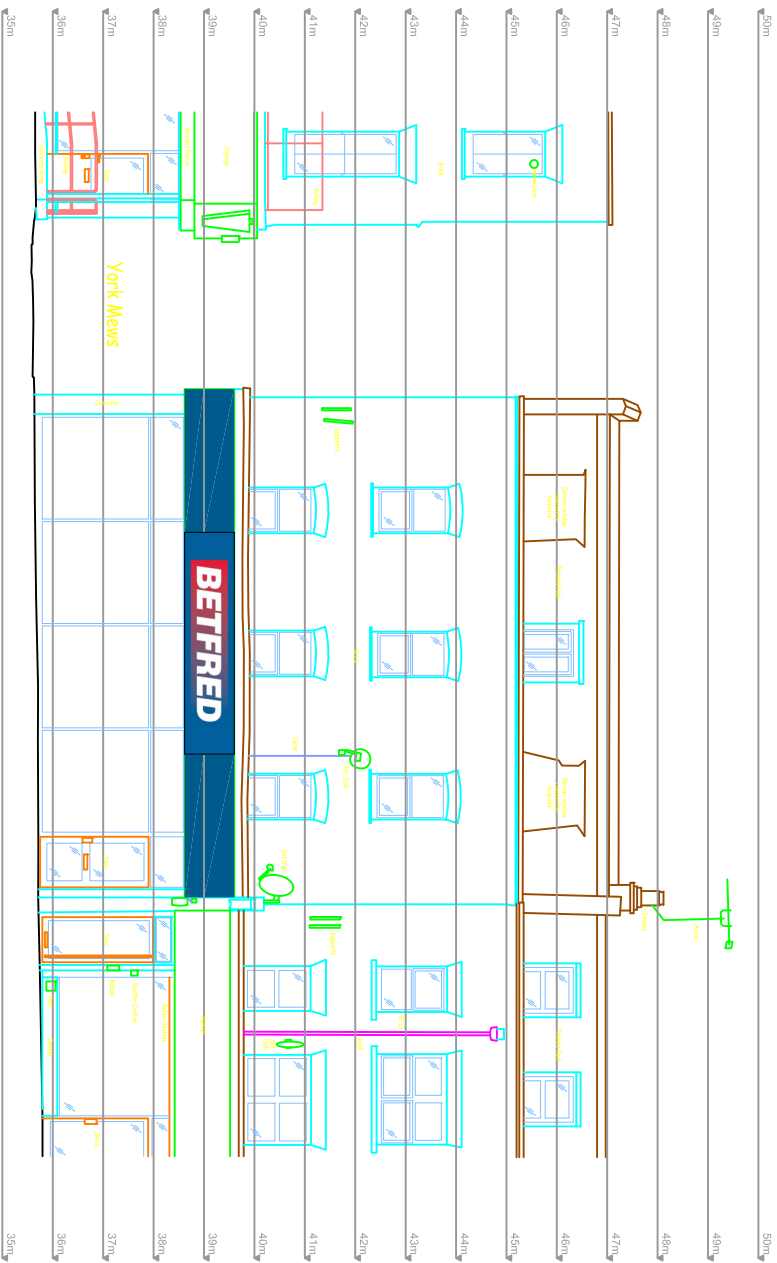

PROPOSED FRONT ELEVATION

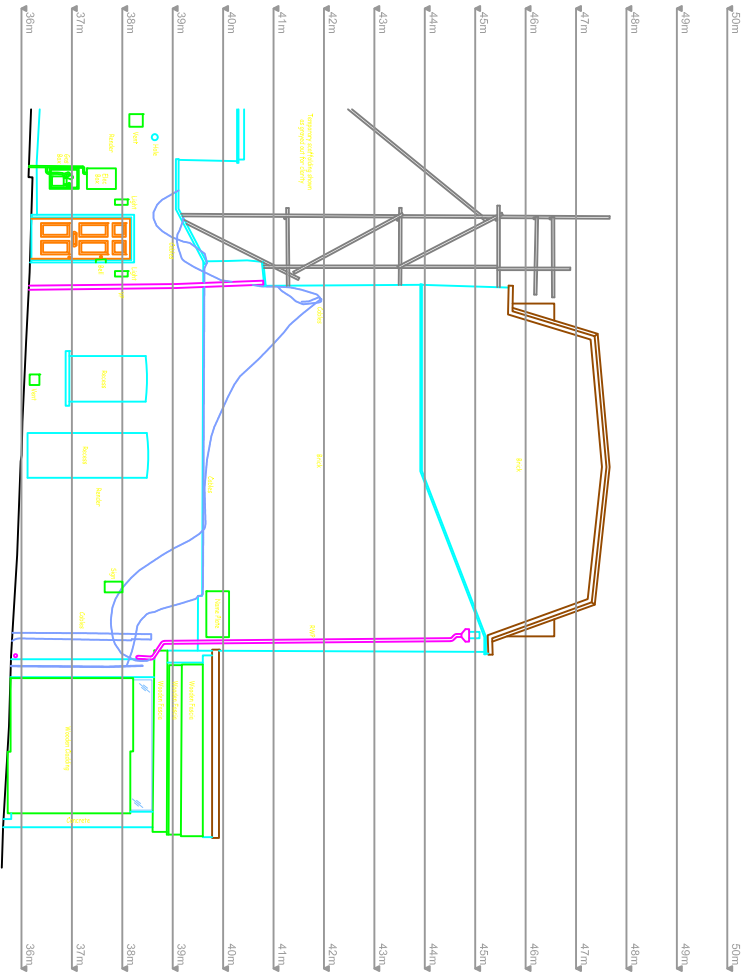

EXISTING SIDE ELEVATION

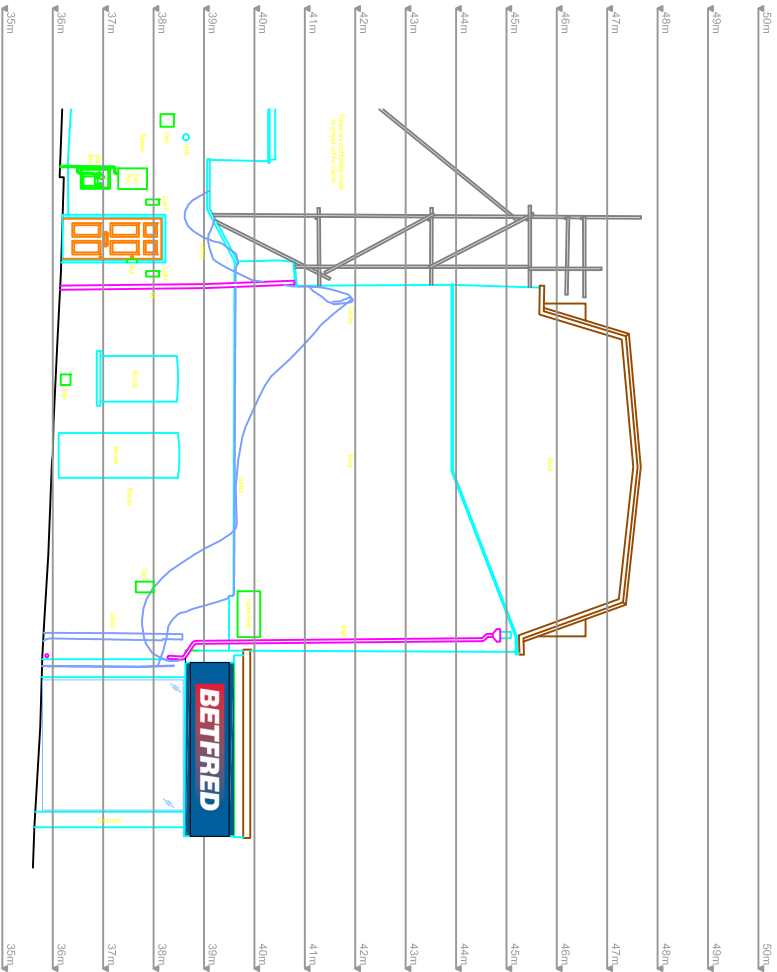

PROPOSED SIDE ELEVATION

Location:

Drawing Approval	
Nick Lowe	
Mark Stebbings	
Regional Manager	
Other	

General Shopfitting Notes:

1. All deliveries to the shops are to be booked with the warehouse at least 48 hours in advance.
2. Vans are loaded up before 12pm the day before so any forgotten items need to be rung through to the warehouse before then.
3. All Contractors, Sub- Contractors, Engineers and Shopfitters are all responsible for the removal of their own rubbish. No rubbish is to be left on site at the end of the fit without approval from the P.M.
4. Pelmet lighting is to be installed above all paper displays runs.
5. Avo 8" Led down lights are to be installed on a 4x4 grid based system
6. Red Led's are to be installed under the counter
7. A full height wall with return to side of the counter, along with a full door set and architraves is to be installed to the staff entrance to the counter for security purposes.
8. The lead shopfitter for the allocated jobs are responsible for the site for the full programme, even if they finish early.
9. Skips are to be organized to be collected prior to leaving site on the final day.

New Blue - RAL 5017	
Old Blue - RAL 5002	
Old Red - Ral 3020	
Tote Green - Ral 6016	

All dimensions are to be checked on site.

Drawing Title:

Shopfront Elevation Plan

Location:

317-319 Kentish Town
London
NW5 2TJ

Drawing No:	2823BF-317/319SEP
Revision:	1
Scale:	1:150
Date:	13/05/22
Drawn:	NJL