NEW 4" PVC S.V.P. PAINTED BLACK.

REMOVE EXISTING WASHBASIN AND MAKE GOOD.

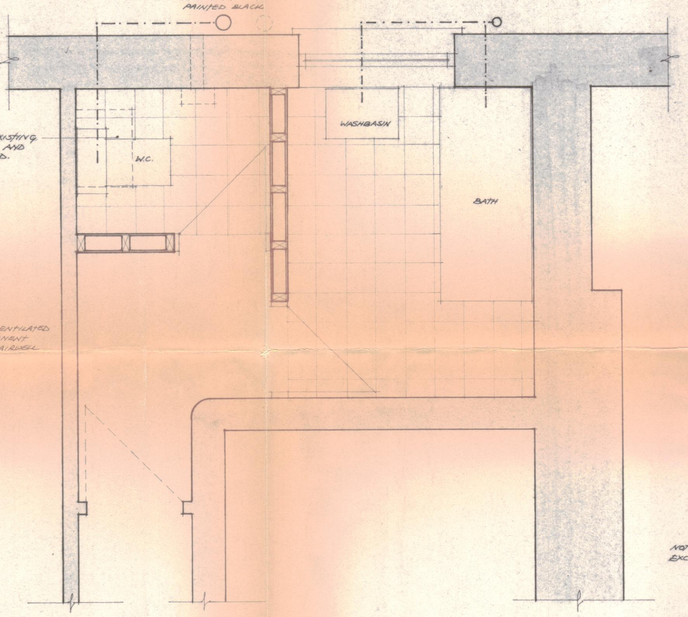

CORRIDOR VENTILATED WITH PERMANENT VENT TO STAIRWELL WINDOW

NOTES TO BOTH DRAWINGS SIMILAR EXCEPT WHERE STATED.

SERVICES —
4" PVC CONNECTION WITH 10" TRAP TO W.C.
1½" LCC CONNECTION WITH DEEP SEAL TRAP TO BATH
1½" LCC CONNECTION WITH DEEP SEAL TRAP TO WASHBASIN
TO BE CONNECTED TO EXISTING S.V.P.

CLEANING AND RODDING EYES TO BE PROVIDED AT ALL BENDS AND JUNCTIONS

THIRD FLOOR

FALSE CEILING OF ½" PLASTERBOARD AND SKIM ON 4"x2" JOISTS AT 16" CENTRES 9'6" ABOVE FLOOR LEVEL TO W.C ON FIRST FLOOR ONLY.

PERMANENT VENT TO BE PROVIDED TO BATHROOM WINDOW

EXISTING 4" PVC S.V.P. PAINTED BLACK.

EXISTING 4" LCC W.S.P

EXISTING 3½" LCC S.V.P.

3" AIRBRICK

GREENWOOD AIRVAC TYPE RD 1 DOUBLE RAIL ROTARY VISTA OR SIMILAR ABOVE FALSE CEILING GIVING MIN. 3 AIR CHANGES PER HOUR

NEW PARTITIONS TO BE 4"x2" STUDS AT 16" CENTRES. HEAD AND SOLE BEARERS COVERED. BOTH SIDES WITH ½" PLASTERBOARD AND SKIM. PARTITIONS TO BE CUT AROUND CISTERNS

NEW 23"x6'6" DOOR AND FRAME TO W.C.

NEW 26"x 6'6" DOOR AND FRAME TO BATHROOM.

9"x 9" PVC TRAP TO BATHROOM AND W.C. FLOORS.

REMOVE EXISTING DOOR AND FRAME AND MAKE GOOD.

9"x9" DUCT OF PLASTERBOARD ON BATTENS ABOVE FALSE CEILING TO FIRST FLOOR ONLY.

W.C.

WASHBASIN

BATH.

PLASTER LOUVRE

REMOVE EXISTING WASHBASIN AND MAKE GOOD.

INFILL SHELF TO BE LEVEL OF BATH

FIRST FLOOR

NOTES

HB1637(3)

REVISION	DATE	MARK
DRAINAGE AMENDED	13.2.78	B
DRAINAGE AND FURTHER NOTES ADDED	16.3.78	A
READ WITH DRAWING No.		

NELLIST BLUNDELL & FLINT

CHARTERED ARCHITECTS & SURVEYORS

32 THE MALL 01 567 2578
EALING W5 1134

CLIENT

BANNINGTON HOTELS LTD.

JOB

WANSBECK HOTEL
5-6 BEDFORD PLACE.

TITLE

ALTERNATIVE PROPOSALS FOR BATHROOMS TO 1ST AND 3RD FLOORS.

DATE 7.3.78 | DRAWN JN

SCALE ¼" = 1'0"

NO 513 | 12 | B

LONDON BOROUGH OF CAMDEN
TOWN AND COUNTRY PLANNING ACTS
- 8 SEP 1977
PLANS APPROVED
ON BEHALF OF THE CO. NOT APPROVED

CTP/WH/8X/D/1149(63)

W.W.

4389ET