

G

F

E

D

C

B


A



DRAWINGS INDICATE DESIGN INTENT ONLY. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING AND DRAWING REPORT ALL CONFLICTS OF INFORMATION TO HW AND SEEK ADVICE BEFORE PROCEEDING. THIS DRAWING IS THE COPYRIGHT OF HLW INTERNATIONAL LTD.

### TENDER

NO.	DATE	REASON FOR ISSUE	BY
1	07.08.22	FOR INFORMATION	ND
2	07.08.22	FOR INFORMATION	ND

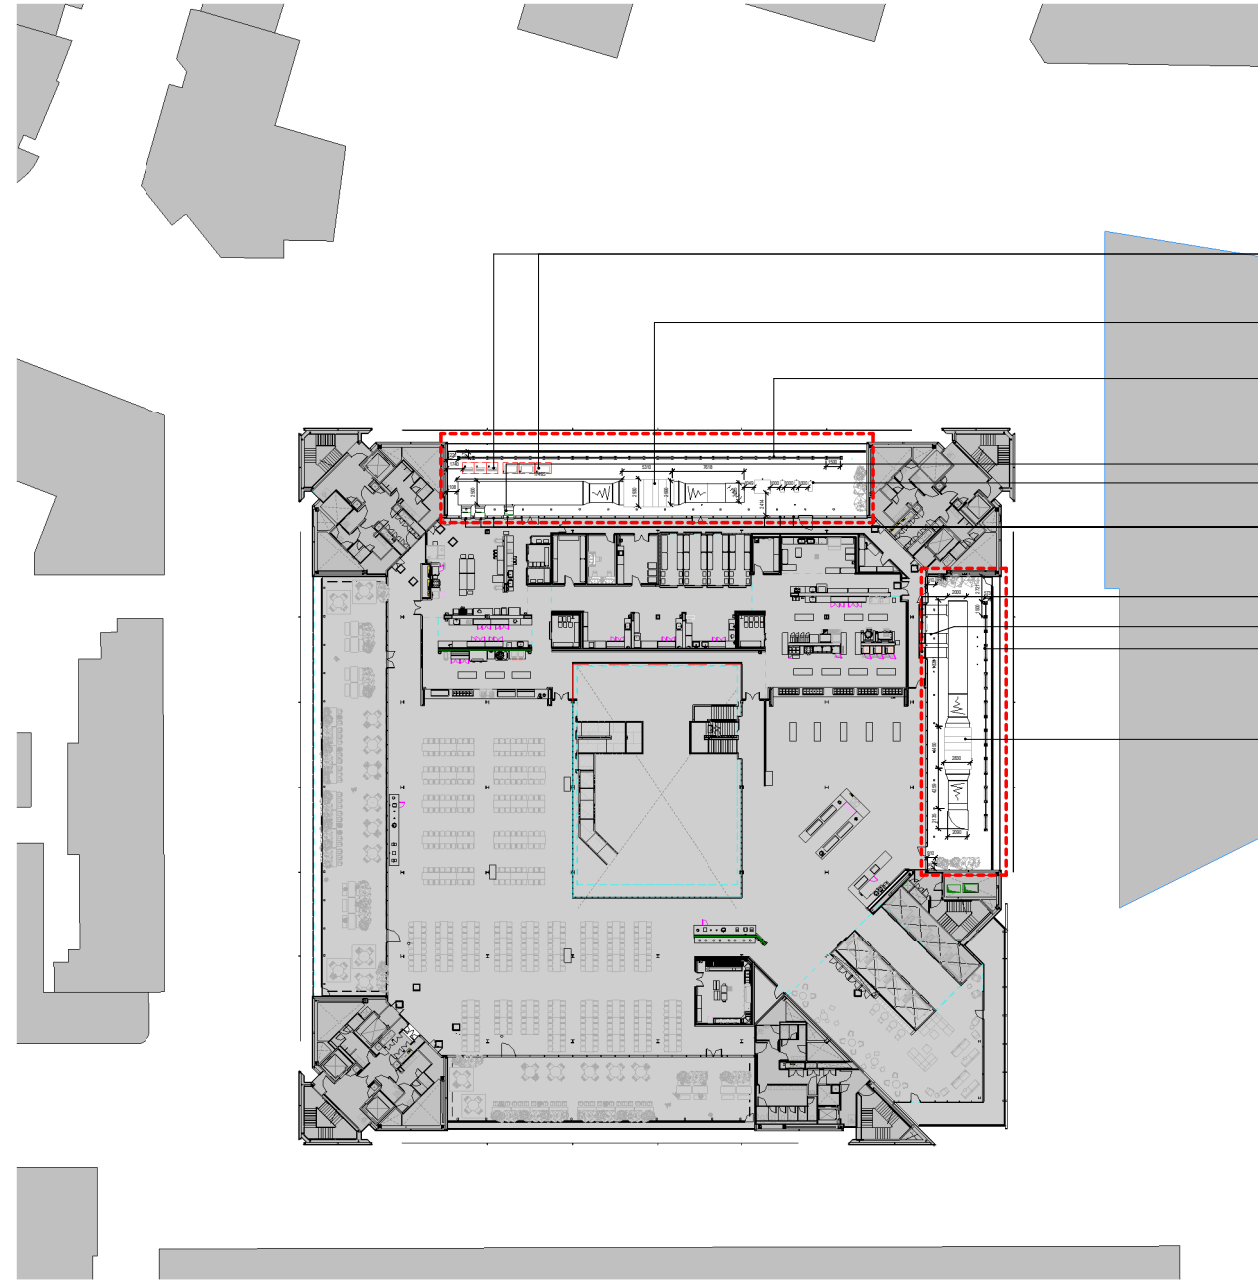

- NEW MECHANICAL EQUIPMENT INSTALLED TO EXTERNAL TERRACE AREA. EQUIPMENT AS FOLLOWS:  
- 2NO. HEAT PUMP UNITS SIZE 1400MM W X 750MM L  
- 2NO. HEAT PUMP UNITS SIZE 900MM W X 350MM L
- NEW MECHANICAL EQUIPMENT INSTALLED TO EXTERNAL TERRACE AREA. EQUIPMENT AS FOLLOWS:  
- AIR HANDLING UNIT 2200MM HIGH WITH ASSOCIATED ATTENUATORS AND PIPWORK TO SUPPORT NEW KITCHEN INSTALLED ON LEVEL 6  
- HIGH LEVEL DUCTWORK PENETRATING FACADE FROM KITCHEN
- NEW POWDERCOATED 100X100MM STEEL BOX SECTION FRAME TO SUPPORT PLANT SCREEN FRAME IN EXCESS TO SLAB BELOW FF.FL OF EXTERNAL TERRACE WITH WATERPROOFING POCKET DETAIL FRAME TO BE POWDERCOATED RAL 9008 TO MATCH ADJACENT FACADE
- STEEL OPEN MESH PLANT SCREENING SYSTEM INSTALLED WITHIN TOP OPENINGS OF FRAME WITH LOW LEVEL PLANTERS CONTAINING CLIMBERING TRACHELOPIETUM ARBESCENTES PLANTS REINSTALLED AT FLOOR LEVEL TO SCREEN MECHANICAL EQUIPMENT FROM VIEW MESH PANELS TO BE POWDERCOATED RAL 9008 TO MATCH ADJACENT FACADE
- NEW HIGH LEVEL DUCTWORK FROM KITCHEN TO PENETRATE FACADE THROUGH NEW SOLID INFILL PANELS
- 1NO. NEW COMPRESSORS REQUIRED FOR KITCHEN REFRIGERATION, SIZES:  
1NO. 1700MM W X 1400MM L, 2NO. 1250MM W X 510MM L, 1NO. 1050MM W X 400MM L
- 1NO. PANELS OF EXISTING FACADE TO BE REPLACED WITH NEW SOLID INSULATED METAL PANELS TO ALLOW HIGH LEVEL DUCTWORK PENETRATIONS
- 2NO. PANELS OF EXISTING FACADE TO BE REPLACED WITH NEW SOLID INSULATED METAL PANELS TO ALLOW HIGH LEVEL DUCTWORK PENETRATIONS
- NEW HIGH LEVEL DUCTWORK FROM KITCHEN TO PENETRATE FACADE THROUGH NEW SOLID INFILL PANELS
- NEW POWDERCOATED 100X100MM STEEL BOX SECTION FRAME TO SUPPORT PLANT SCREEN FRAME IN EXCESS TO SLAB BELOW FF.FL OF EXTERNAL TERRACE WITH WATERPROOFING POCKET DETAIL FRAME TO BE POWDERCOATED RAL 9008 TO MATCH ADJACENT FACADE
- STEEL OPEN MESH PLANT SCREENING SYSTEM INSTALLED WITHIN TOP OPENINGS OF FRAME WITH LOW LEVEL PLANTERS CONTAINING CLIMBERING TRACHELOPIETUM ARBESCENTES PLANTS REINSTALLED AT FLOOR LEVEL TO SCREEN MECHANICAL EQUIPMENT FROM VIEW MESH PANELS TO BE POWDERCOATED RAL 9008 TO MATCH ADJACENT FACADE
- NEW MECHANICAL EQUIPMENT INSTALLED TO EXTERNAL TERRACE AREA. EQUIPMENT AS FOLLOWS:  
- AIR HANDLING UNIT 2200MM HIGH WITH ASSOCIATED ATTENUATORS AND PIPWORK TO SUPPORT NEW KITCHEN INSTALLED ON LEVEL 6  
- HIGH LEVEL DUCTWORK PENETRATING FACADE FROM KITCHEN

2 P003 - PROPOSED GENERAL ARRANGEMENT - LEVEL 06



SEE NOTES



CLIENT  
META  
PROJECT NAME  
TRITON SQUARE  
PROJECT ADDRESS  
1 TRITON SQUARE, LONDON NW1 3DX  
DRAWING TITLE  
PROPOSED GENERAL  
ARRANGEMENT - LEVEL 06

SCALE	PROJECT NO.
1 : 200 @ A0	21176
DRAWN BY	CHECKED BY
ND	CP
DRAWING NO.	REV NO.
P003	2

G

F

E

D

C

B

A

© HW 2022