



Masonry Stitching at Location 'V'




Masonry Stitching at End Section of Pier at Location 'M'



Crack Stitching at Location 'M'


Walls to be stitched using Helifix Cem Ties at 300mm vertical centres, for full height of the crack including the top and bottom. Ties to be located 175mm back from the end face of the wall. To be installed strictly in accordance with Helifix's recommendations. Holes to be made at mid-depth of bricks.



Plan

Missing areas of brickwork to be replaced with matching stocks

Helifix 6mm grade 304 Helibar into slot in bed joints, bonded with Helibond grout & installed strictly in accordance with Helifix's recommendations. Bars at every 5 courses

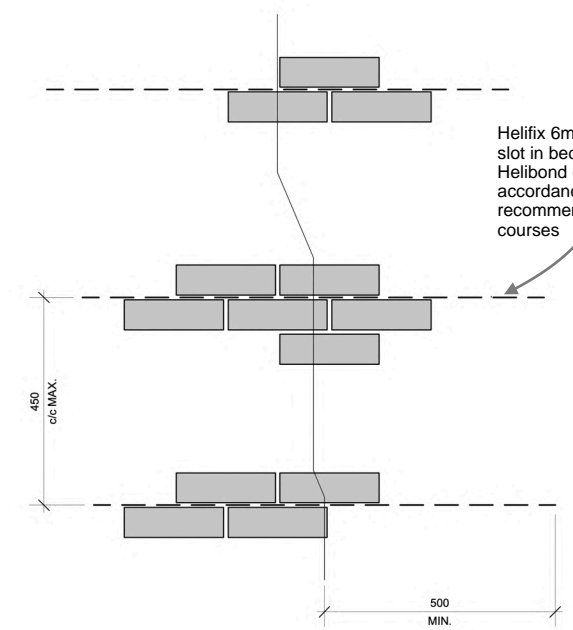

NOTES  
 1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL ARCHITECTS AND ENGINEERS DRAWINGS AND SPECIFICATIONS  
 2. DO NOT SCALE THIS DRAWING. ALL DIMENSIONS AND LEVELS TO BE CONFIRMED ON SITE.

Rev.	Date	Made by	Amendments
Status PRELIMINARY			



**Michael Hadi Associates Ltd.**  
 Consulting Structural Engineers

14-18 Old Street  
 London EC1V 9BH  
 t 020 7375 6340  
 www.mha-consult.co.uk

Job Title 59 Lambs Conduit Street, WC1N 3NB				Job No. 21015
Drawing Title Masonry Repairs				Drg. No. SK06
Scale @ A3 NTS	Date Oct. 2021	Drawn MC	Checked RD	Rev.