



NOTES

1. EXACT LOCATIONS AND MOUNTING HEIGHTS OF ALL EQUIPMENT AND ACCESSORIES TO BE CLARIFIED PRIOR TO THE COMMENCEMENT OF THE ASSOCIATED WORKS
2. EXACT FINAL LOCATIONS OF EQUIPMENT AND DIMENSIONS ARE TO BE TAKEN FROM THE FF&E MANUFACTURERS DRAWINGS
3. THE ELECTRICAL CONTRACTOR SHALL LIAISE WITH THE POOL EQUIPMENT SUPPLIER CONFIRMING THE RATINGS & PHASES OF ALL EQUIPMENT & NECESSARY PROTECTIVE DEVICES & UNDERTAKE RECALCULATION OF CIRCUITS WHERE LOCATIONS HAVE ALTERED.
4. THE ELECTRICAL CONTRACTOR SHALL LIAISE WITH THE MECHANICAL CONTRACTOR TO CLARIFY ALL PIPEWORK DROPS
5. GENERALLY BONDING OUTLETS SHALL BE PROVIDED USING COPPER STRANDED LSF G/Y SHEATHED CABLE EMANATING FROM A SINGLE GANG CABLE OUTLET RECESSED WITHIN THE WALL ADJACENT EQUIPMENT TO BE BONDED. CABLE SHALL BE 'PIGGY-TAIL' COILED FROM OUTLET TO THE EQUIPMENT WITH APPROPRIATE FIXING
6. GENERALLY ACCESSORIES SHALL BE RECESSED WITHIN THE BUILDING FABRIC AS NOTED WITHIN THE SPECIFICATION
7. ISOLATING SWITCHES SHALL ALSO BE PROVIDED RECESSED WITHIN THE BUILDING FABRIC PROVIDED RECESSED USING CLIPSAL LTD IP66 'INDUSTRIAL 56 SERIES' RANGE OF ACCESSORIES
8. REFER TO SCHEMATIC WIRING DIAGRAMS FOR FURTHER INFORMATION WHERE APPLICABLE
10. HAND DRYERS SHALL BE MOUNTED IN ACCORDANCE WITH MANUFACTURES INSTALLATION 1200mm FROM THEIR UNDERSIDE ASSOCIATED CONNECTION UNIT SUPPLIES SHALL BE MOUNTED ABOVE DRYERS AT 2200mm FFL WITH CONCEALED CONDUIT BESA BOX TO REAR OF DRYERS.
11. THE EXACT LAYOUT OF SERVICE DUCTS TO BE AGREED ON SITE. THIS CONTRACT SHALL INCLUDE FOR CLOSELY LIAISING WITH THE MECHANICAL SERVICES INSTALLATION CONTRACTOR & SETTING UP A SAMPLE DUCT WITH ALL SERVICES PIPEWORK, TRAY ETC. FOR APPROVAL
12. GENERALLY ALL CABLE CONTAINMENT IS ABSENT FROM THE DRAWINGS FOR CLARITY. ONLY WHERE THEY MAYBE ILLUSTRATED ARE THEY INDICATIVE. THE ELECTRICAL CONTRACTOR SHALL BE DEEMED TO INCLUDE FOR ALL NECESSARY CONTAINMENT IN THE TYPES, ROUTES, QUANTITIES, SIZES & COMPARTMENTILISED AS REQUIRED.

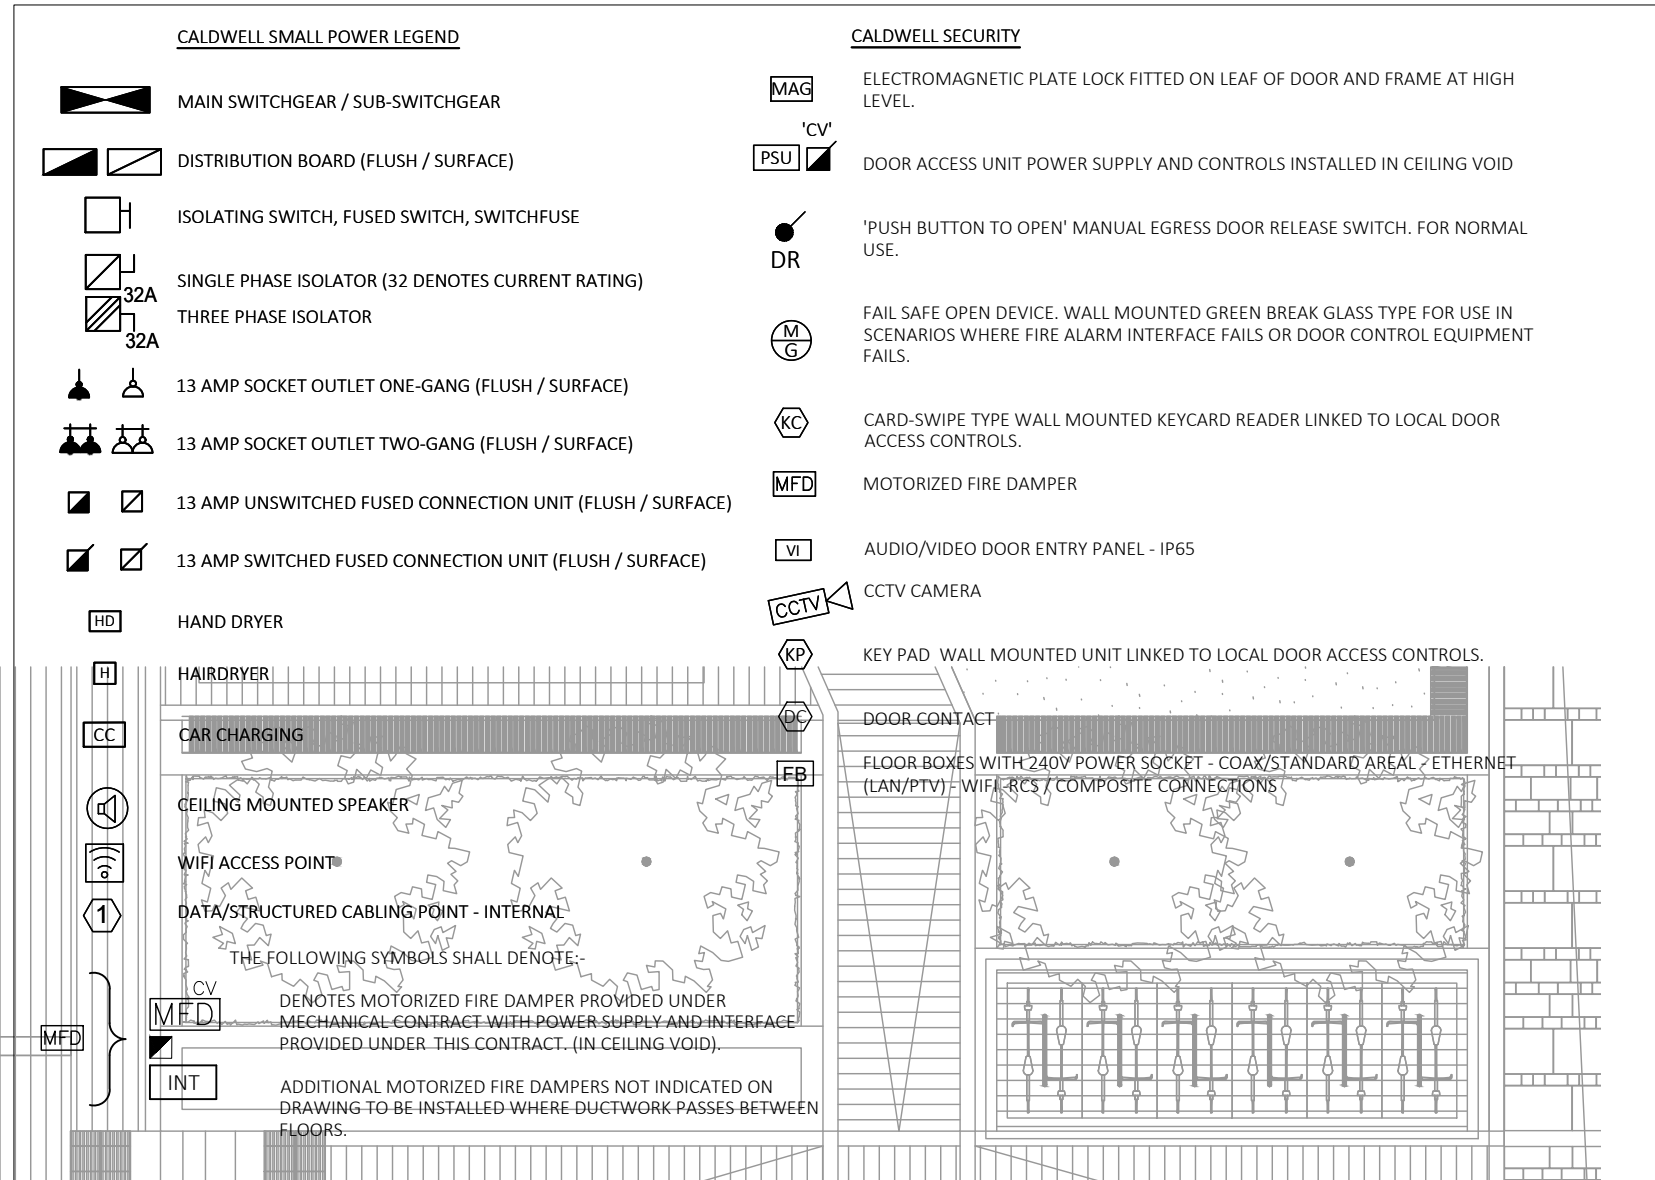

FOR CONTINUATION REFER TO DRG NO MPP2-CAL-ZZ-00-M2-E-200

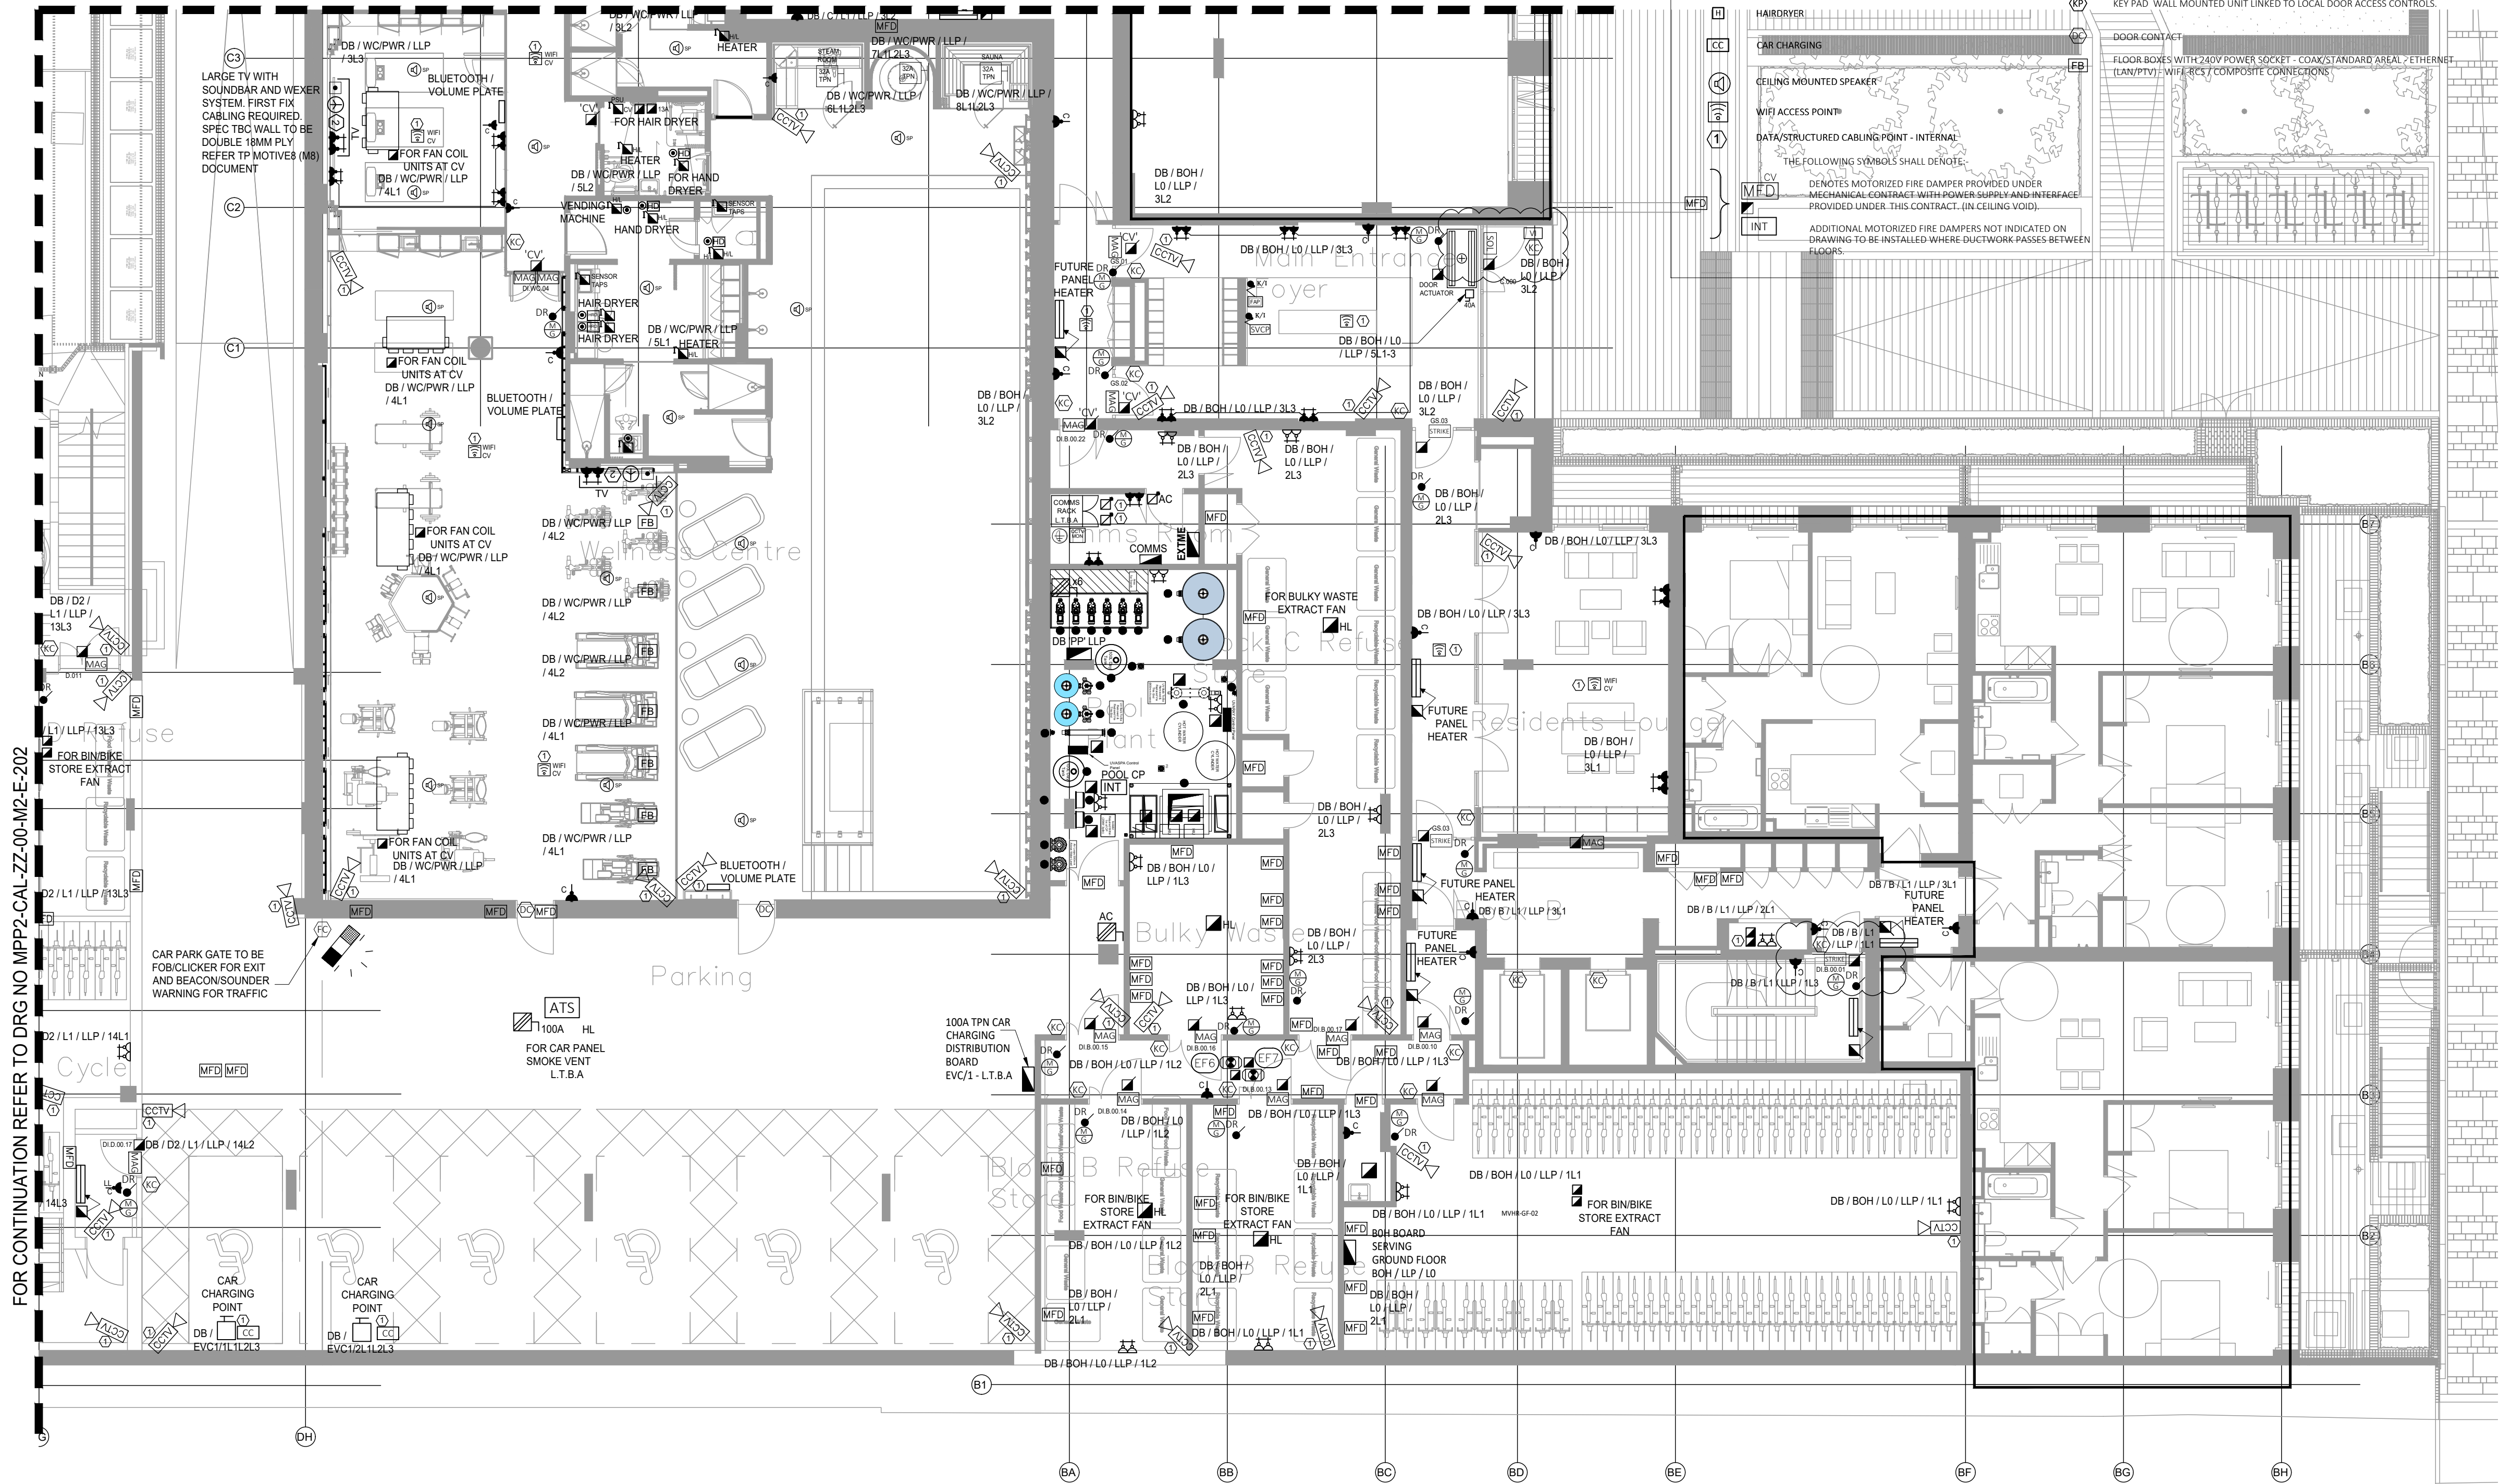

INCLUDE ALL NECESSARY OFFSETS OF SERVICES IN CEILING VOIDS, SERVICE DUCTS AND ALL OTHER AREAS TO ACHIEVE CROSSOVERS AND CO-ORDINATION OF MECHANICAL AND ELECTRICAL SERVICES.

I	JUN.22	CONTRACT ISSUE - UPDATED TO SUIT SECURITY REQUIREMENTS	CS	LW
H	JUN.22	CONTRACT ISSUE - UPDATED TO SUIT MECH REQUIREMENTS AND NEW XREF	CS	LW
G	MAR.22	CONTRACT ISSUE - DISTRIBUTION BOARD REFERENCES FOR BASEMENT PLANT ROOM	CS	LW
F	MAR.22	CONTRACT ISSUE - DOOR CONTACTS ADDED TO WELLNESS CENTER DOORS AND LEGEND, COMMS ROOM REMOVED	CS	LW
E	FEB.22	CONTRACT ISSUE - UPDATED XREF, ACCESS CONTROL UPDATED TO SBD, MFD LEGEND UPDATED TO INCLUDE INT	CS	LW
D	NOV.21	CONTRACT ISSUE - BLOCK D LOBBY	CS	LW
C	OCT.21	CONTRACT ISSUE	CS	LW
B	FEB.21	TENDER ISSUE	CS	LW
A	DEC.20	ISSUED FOR REVIEW	CS	LW
REV	DATE	DESCRIPTION	DR	CK

Caldwell

ARCHITECT
RYDER ARCHITECTS

JOB
MOUNT PLEASANT
PHASE 2
4023

DRAWING
GENERAL PURPOSE SOCKET OUTLETS,
SMALL POWER AND SPECIALIST SYSTEMS
LEVEL 00
BLOCK B

DRAWING NO./REVISION
MPP2 - CAL - ZZ - 00 - M2 - E - 201 - 1

SCALE/PRINTED AT 1:100@A1	DATE DEC'20	DRAWN CS	CHECKED LW
------------------------------	----------------	-------------	---------------

UNIT 6 FORESTGROVE BUSINESS PARK TEL: 02890699720 FAX: 02890641625
NEWTOWNBRED A BELFAST BT8 6AW E-MAIL: admin@caldwellconsulting.net