





WORKS TO BE CARRIED IN CLOSE PROXIMITY OF OLE

CONTRACTOR TO BE MINDFUL OF LETTING DEBRIS FALL ON RAILWAY





- PROPOSED WORKS NOTE**
- IF DURING THE WORKS THE CONTRACTOR IS CONCERNED ABOUT THE STABILITY OF THE STRUCTURES / EMBANKMENT THEY SHOULD CEASE ACTIVITIES AND CONTACT THE DESIGNER.
  - ALL MATERIALS USED IN THE WORKS SHALL BE TO EUROPEAN STANDARDS OR OTHER APPLICABLE SPECIFICATIONS.
  - ALL WORK TO BE CARRIED OUT TO EUROPEAN CODES OF PRACTICE AND IN ACCORDANCE WITH GOOD WORKMANSHIP PRACTICE.
  - ALL PROPRIETARY SYSTEMS TO BE IN ACCORDANCE WITH CURRENT APPROVED CODES OF PRACTICE.
  - PROPRIETARY SYSTEMS TO BE INSTALLED, FIXED, USED / REMOVED IN ACCORDANCE WITH MANUFACTURERS DETAILS.


- GENERAL NOTES**
- THIS DRAWING IS FOR F001 PURPOSES ONLY.
  - THIS DRAWING HAS BEEN PRODUCED FROM A POINT CLOUD SURVEY UNDERTAKEN BY NETWORK RAIL IN NOV / DEC 2020.
  - DO NOT SCALE OFF THIS DRAWING. ALL DIMENSIONS TO BE CHECKED AND CONFIRMED BY THE CONTRACTOR PRIOR TO STARTING OF ANY WORK. ANY ERRORS OR DISCREPANCIES ARE TO BE BROUGHT TO THE ATTENTION OF THE NETWORK RAIL ENGINEER.
  - ANY DISCREPANCIES IN THE INFORMATION GIVEN ARE TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER AS SOON AS POSSIBLE.
  - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER CONTRACT DRAWINGS AND RELEVANT SPECIFICATIONS / DOCUMENTATION.
  - THE CONTRACTOR IS RESPONSIBLE FOR THE STABILITY OF THE STRUCTURES / EMBANKMENT AT ALL TIMES DURING THE WORKS.

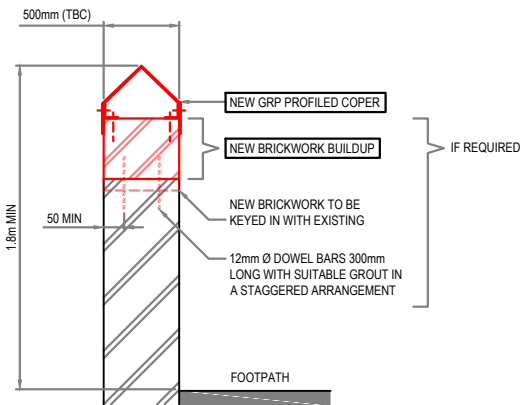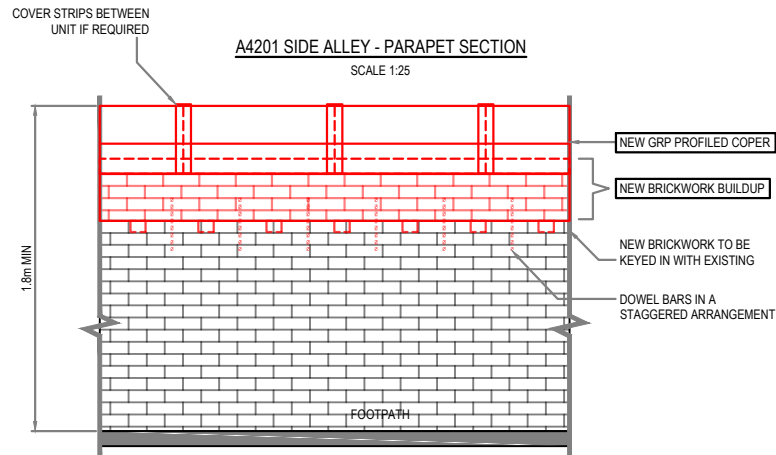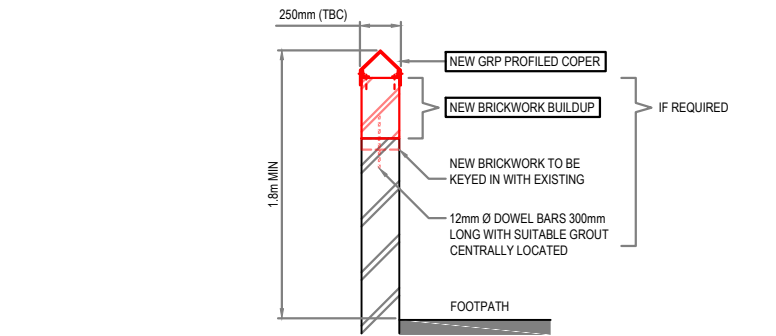

OVAL ROAD - PARAPET SECTION  
SCALE 1:25

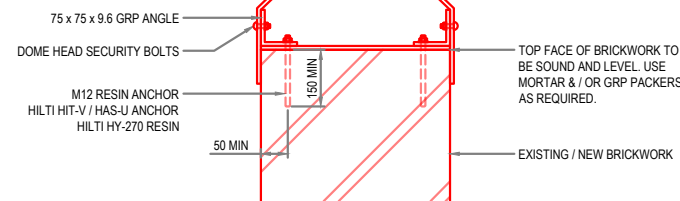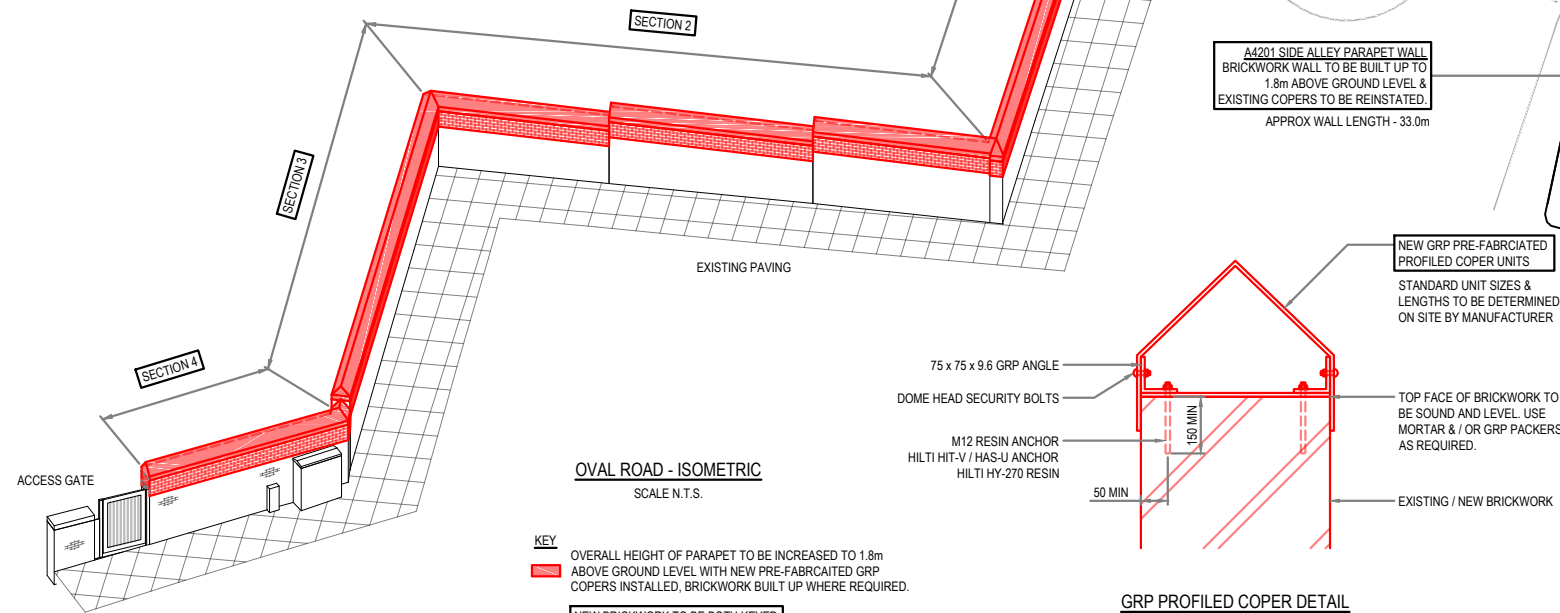

GRP PROFILED COPER DETAIL  
SCALE 1:10

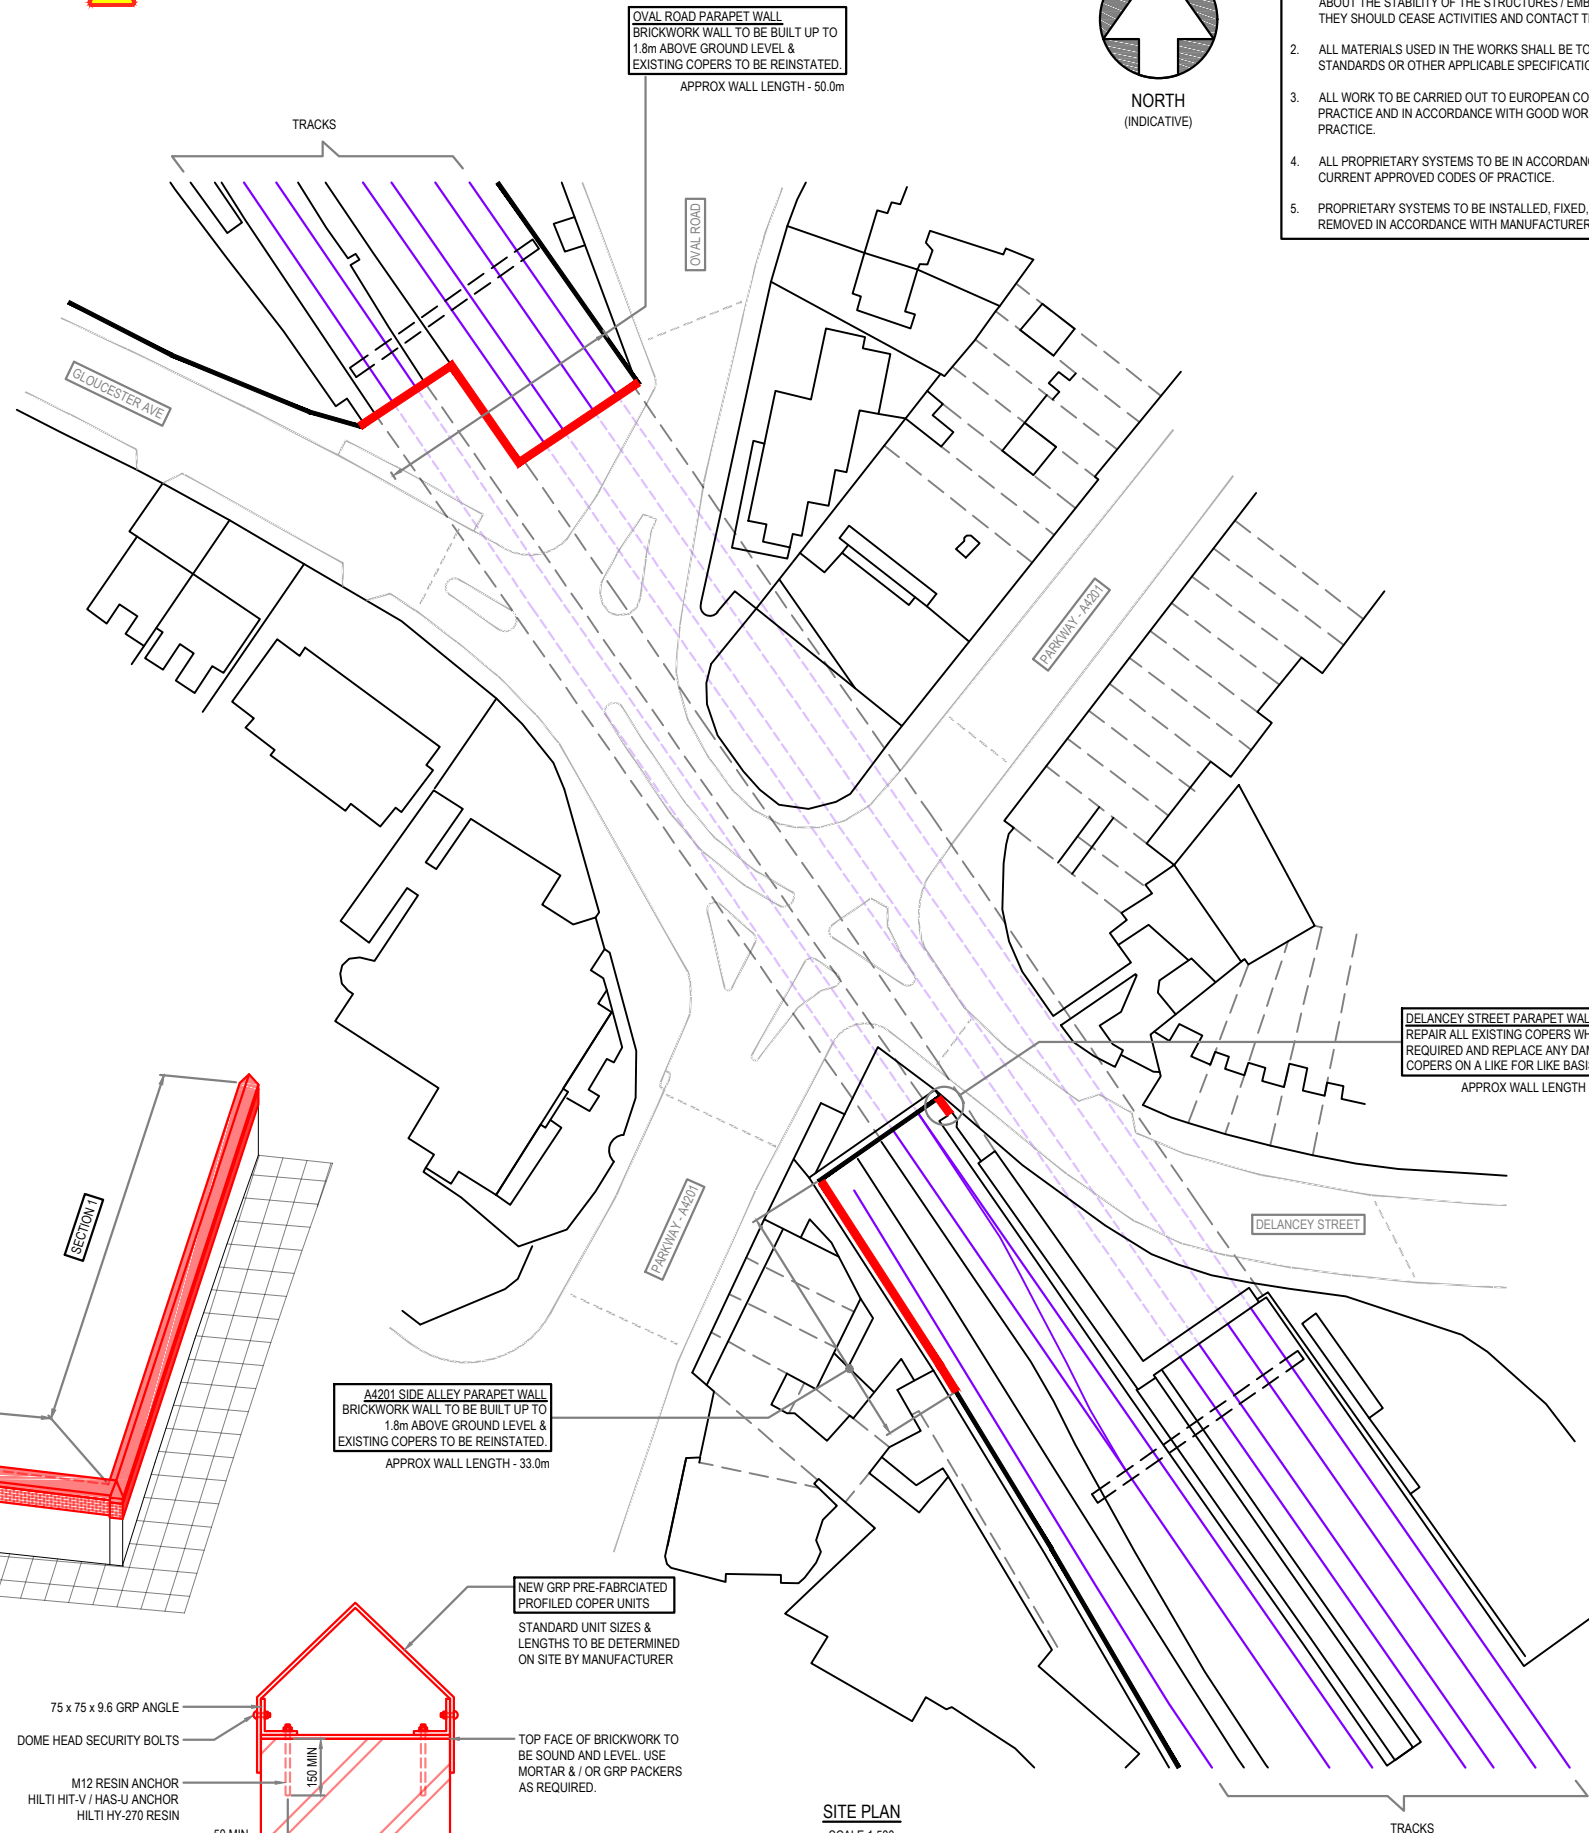

SITE PLAN  
SCALE 1:500

DELANCEY STREET PARAPET WALL  
REPAIR ALL EXISTING COPERS WHERE  
REQUIRED AND REPLACE ANY DAMAGED  
COPERS ON A LIKE FOR LIKE BASIS  
APPROX WALL LENGTH - 5.0m

B01	05.08.21	FORM 003 (1) ISSUE	NR	DK	TP
A01	28.01.21	FORM 001 (1) ISSUE	NR	DK	TP
REV	DATE	DESCRIPTION OF REVISIONS	DRAWN	CHK'D	APPR'D

**SAFETY HEALTH AND ENVIRONMENTAL INFORMATION**

THE HAZARDS AND RISKS ASSOCIATED WITH THE WORKS SHOWN ON THIS DRAWING AND DESCRIBED IN THE SCHEDULE OF WORKS ARE CONSIDERED TO BE WITHIN THE REASONABLE, NORMAL AND ACCEPTABLE LIMITS FOR GENERAL BUILDING AND MAINTENANCE WORKS. PLEASE REFER TO DESIGNER RISK ASSESSMENT  
DOCUMENT REF:

STATUS  
FORM F002/F003 ACCEPTANCE



Basingstoke Campus  
Gresley Road  
Basingstoke RG21 4ES

PROJECT: 163514

PROJECT ALPHA - PHASE 2  
ANTI-TRESPASS MEASURES

DRAWING TITLE  
EUSTON STATION - NORTHERN SITES  
PROPOSED LAYOUT

DESIGNED	NWR	SIGNED	NWR	DATE	AUG 21
DRAWN	N Reinhardt	SIGNED	N Reinhardt	DATE	AUG 21
CHECKED	D Kennedy	SIGNED	D Kennedy	DATE	AUG 21
APPROVED	T Phillips	SIGNED	T Phillips	DATE	AUG 21

SCALE(S) AT A1 SHEET SIZE 841 x 594  
AS SHOWN AT A1  
ELR & MILEAGE  
LEC1

DRAWING NUMBER  
171110-NRW-LEC1-EUS-DRG-ECV-000002  
REVISION  
B01