

DEMOLITION NOTES:

GENERAL

To be read in conjunction with Structural Engineer and M&E Engineers specification and drawings. Removal of any structural, mechanical or electrical items should only be carried out following investigation as outlined by SE / M&E specifications and following direct instruction by the project manager.

OFFICES

Internal Walls - All secondary tenant partitions and screens indicated in red to be stripped out.
Walls indicated with red dashed lines to be removed.
Skirting boards to all walls to be carefully removed
Windows - All existing blinds to be removed, secondary glazing to be removed

Columns - Existing boxing out and finishes to columns to be stripped back to bare structure, existing ornate capitals to metal columns to be retained and protected.

Ceilings - All MF ceiling, ceiling tiles, suspended ceiling framework, associated fixings and light fittings to be stripped out back to historic fabric.

Light Fittings and CCTV - All existing light fittings to be removed.
 All existing CCTV cameras to be removed.

Furniture - All remaining tenant furniture, seating, tea points, storage and desks to be stripped out.

Floors - All existing floor finishes, raised floor tiles and pedestals to be stripped out back to slab level.

Allow for existing screed to be removed to all office floors, subject to further structural investigation

WC's
 All existing sanitaryware, vanity units and associated pipework to be removed.

All existing cistern housings / IPS access panels to be removed.

All existing cubicle doors and separating walls to be stripped out.

All ceilings, lighting, wall finishes to be stripped out back to bare structure.

All existing floor finishes, raised floors and screed to be stripped out back to structural slab level.

21 SOUTHAMPTON ROW STAIRS & LOBBY
Stairs
 Existing stair to be removed entirely inline with Structural Engineers information.

Lobby
 All existing floor finishes, and screed to lobby area to be stripped out back to slab level.

Allow for the slab to be removed to allow for construction of new stair core

VERNON & SICILIAN HOUSE STAIRS & LOBBY
Stairs

Existing terrazzo finishes to main stair to be retained and protected throughout construction.

Existing handrails to be removed entirely throughout the staircase.

Existing cladding to be removed from the lift enclosure and existing lift cars / running gear to be removed. PLEASE NOTE THAT ASBESTOS HAS BEEN CONFIRMED WITHIN THESE LIFT ENCLOSURES.

Allow for the existing concrete stair from 4th to 5th floors to be retained and repaired as required.

Lobby
 All existing floor finishes, and screed to lobby area to be stripped out back to slab level.

All existing doors and frames stripped out.

SERVICES - (Works to be undertaken in accordance with M&E requirements)

Fire Alarms
 All existing fire alarms to be disconnected and removed.

Office areas
 All existing radiators and wall mounted heating to be removed.

All existing heating/cooling units to be removed
 All ductwork and cabling to be removed

All above ceiling services, ductwork and cabling to be removed
 Risers and riser doors to be removed as indicated.

WC's and Lobby areas
 All existing radiators and wall mounted heating to be removed

Indicates original fabric to be demolished. Refer to structural engineers information for extent of structural alterations to indicated areas

Indicates non original non structural partitions to be removed

Indicates non structural elements that need to be removed / demolished


Indicates areas of structural openings to be carefully created within existing slabs in line with approved risk assessment and approved method statements

Indicates areas of internal screed / finishes to be stripped back to bare structure in line with approved risk assessment and approved method statements

Indicates areas of external floor finishes to be stripped back in line with approved risk assessment and approved method statements

Indicates areas where internal screed to be retained, areas will have reduced floor void with new raised access floor

| Schedule of Works Key: | |
|------------------------|---|
| 01 | 01.105.01 - Existing windows to Southampton Row to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed |
| 02 | 01.105.02 - Existing windows to Sicilian Avenue to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed |
| 03 | 01.105.03 - Existing non original fire escape door and window to be removed from existing structural openings |
| 04 | 01.105.04 - Existing window to existing fire escape to be removed from existing structural opening |
| 05 | 01.105.05 - Existing windows to rear elevation of 21 Southampton Row to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed |
| 06 | 01.105.06 - Existing window to previously infilled stairwell to be retained in existing structural opening |
| 07 | 01.105.07 - Existing windows to rear elevation of Vernon + Sicilian House to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed |
| 08 | 01.105.08 - Existing windows to rear elevation of Vernon/Sicilian House cores to be retained, existing paintwork to be stripped back ready for redecoration, plus existing secondary glazing to be removed |
| 09 | 01.105.09 - Existing areas of screed to be removed back down to original structural slab level |
| 10 | 01.105.10 - New penetrations formed through existing slabs to provide new service riser, to be developed in accordance with structural engineers specification |
| 11 | 01.105.11 - New penetration formed through existing slabs to provide new central staircase, to be developed in accordance with structural engineers specification |
| 12 | 01.105.12 - Existing loadbearing masonry spine walls to demolished in accordance with structural engineers specification |
| 13 | 01.105.13 - Existing non loadbearing masonry walls to be demolished in accordance with structural engineers specification |
| 14 | 01.105.14 - Existing structural steel column to be retained and protected throughout works |
| 15 | 01.105.15 - 5th floor mansard roof demolished to allow for new rooftop extension |
| 16 | 01.105.16 - New structural opening to be formed in Sicilian House core wall to form new service riser with double doors and new penetrations formed through wall at high level for new ductwork routes |
| 17 | 01.105.17 - Existing structural opening to Vernon House core lightwell window to be enlarged to form new service riser with double doors and new penetrations formed through wall at high level for new ductwork routes |
| 18 | 01.105.18 - Existing structural opening to Vernon House core lightwell window to be enlarged to form new doorway into new WC core, lintel to structural engineer specification |
| 19 | 01.105.19 - Existing concrete stair to be retained and protected throughout works |
| 20 | 01.105.20 - Lift car and associated services to be removed entirely, shaft wall linings to be removed completely back to structure which is to be retained. (PLEASE NOTE ASBESTOS HAS BEEN IDENTIFIED IN LIFT SHAFT) |
| 21 | 01.105.21 - Non original blockwork riser enclosures to be demolished entirely |
| 22 | 01.105.22 - Non original partitions forming services risers to be demolished entirely |
| 23 | 01.105.23 - Existing timber stair to 21 Southampton Row core be removed entirely |
| 24 | 01.105.24 - Lift car and associated services to be removed entirely, shaft wall linings and structure to be removed completely. |
| 25 | 01.105.25 - Existing roofing membrane to be removed ready for new membrane to be installed |
| 26 | 01.105.26 - Existing key clamp handrail guarding to be retained |

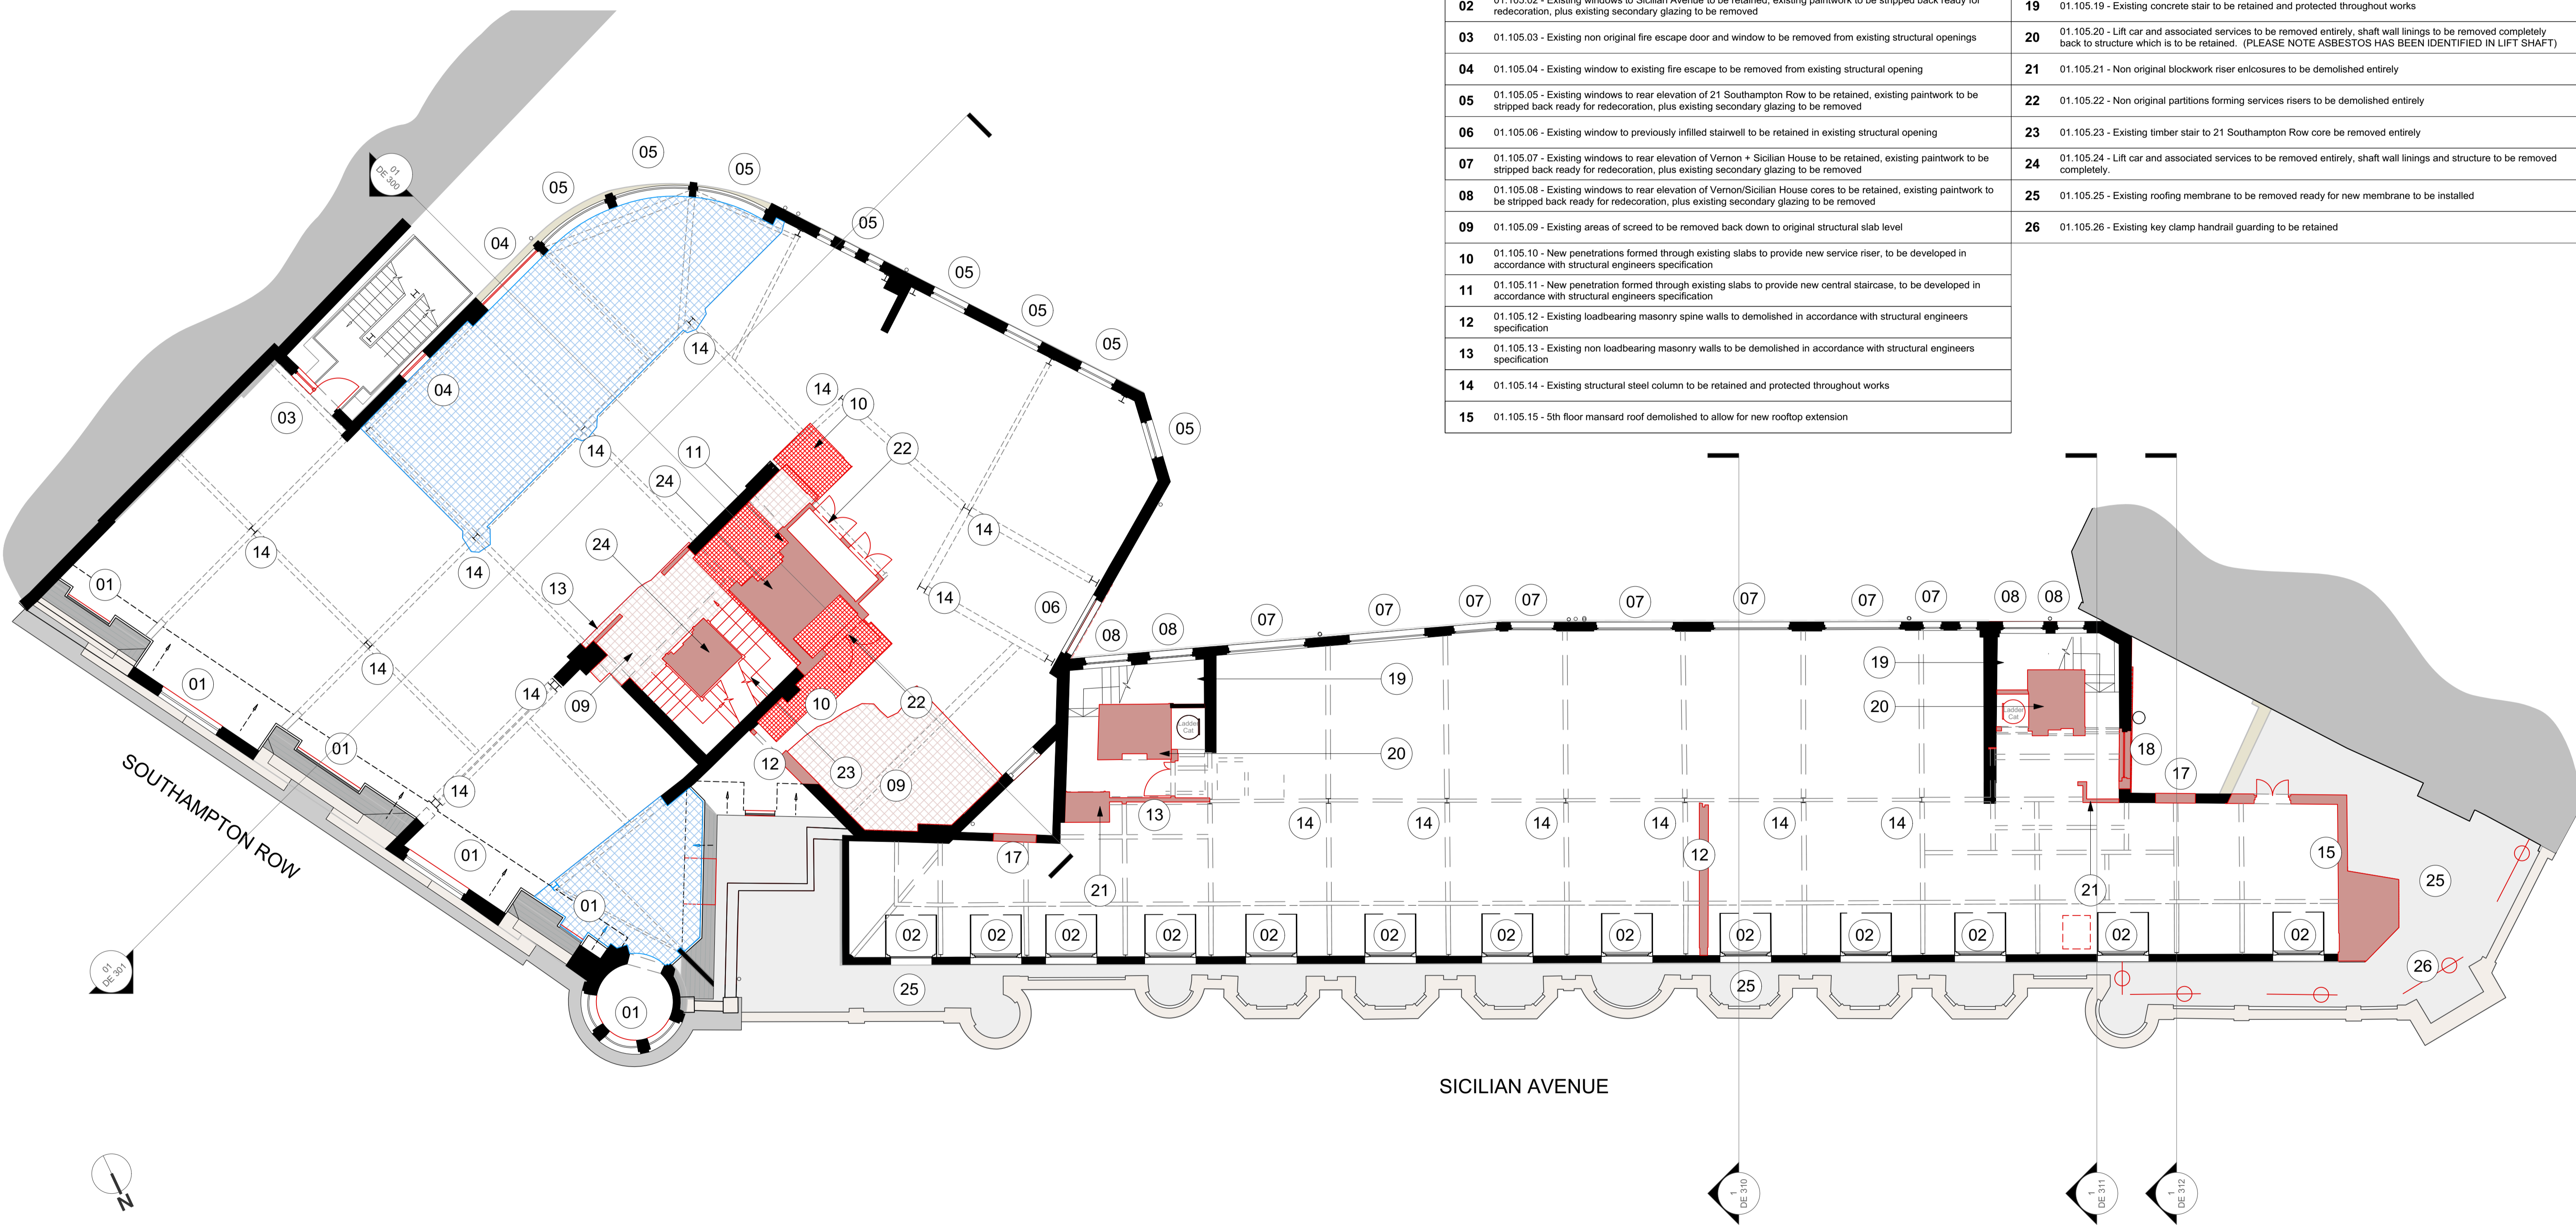

1 Fifth Floor Demolition Plan
 Scale: 1:100

All dimensions to be checked on site prior to commencement of any works, and/or preparation of any shop drawings.
 Sizes of and dimensions to any structural or services elements are indicative only. See structural and service engineers drawings for actual sizes / dimensions.
 This drawing to be read in conjunction with all other Architect's drawings, specifications and other Consultants' information.
 All proprietary systems shown on this drawing are to be installed strictly in accordance with the Manufacturers/Suppliers recommended details.
 Any discrepancies between information shown on this drawing and any other contract information or manufacturers/suppliers recommendations is to be brought to the attention of the Architect.

| Revision | Date | Amendment |
|----------|------------|---------------------|
| PL-1 | 22/07/2022 | Issued for Planning |

| | | |
|--|--|---------------------------|
| Date May 2022 | Project Vernon, Sicilian Hse/21 Southampton Row | Job Ref. 383 |
| Scale 1:100 @A1 | Drawn MW | Check AY |
| Status PLANNING | Client Ref EDR 383 (DE) 105 | Drwg. no. 383 (DE) 105 |
| Hale Brown Architects Ltd. Unit 1.04, Edinburgh House, 170 Kennington Lane, London, SE11 5DP | | Rev. PL-1 |
| T: 020 3735 7442 E: mail@halebrown.com W: www.halebrown.com | | halebrown architects |