



Containment routes key

- Floor trunking in existing 75mm floor build up for permanent services - See detail 2201-5-550
- Floor access points e.g. <https://cableductuk.com/minima.html>
- High level hollow dado for temporary cableways - see sections and Detail 1 from 2201-5-551
- Containment in roof void for temporary cableways to circle at high level - see Detail 3 from 2201-5-551
- Permanent cableways in new high skirting - see Detail 2 from 2201-5-551
- Permanent cableways in existing balustrade - See detail 2201-5-551

Works to plant roof on 2F level to be undertaken during Phase 2 of the project

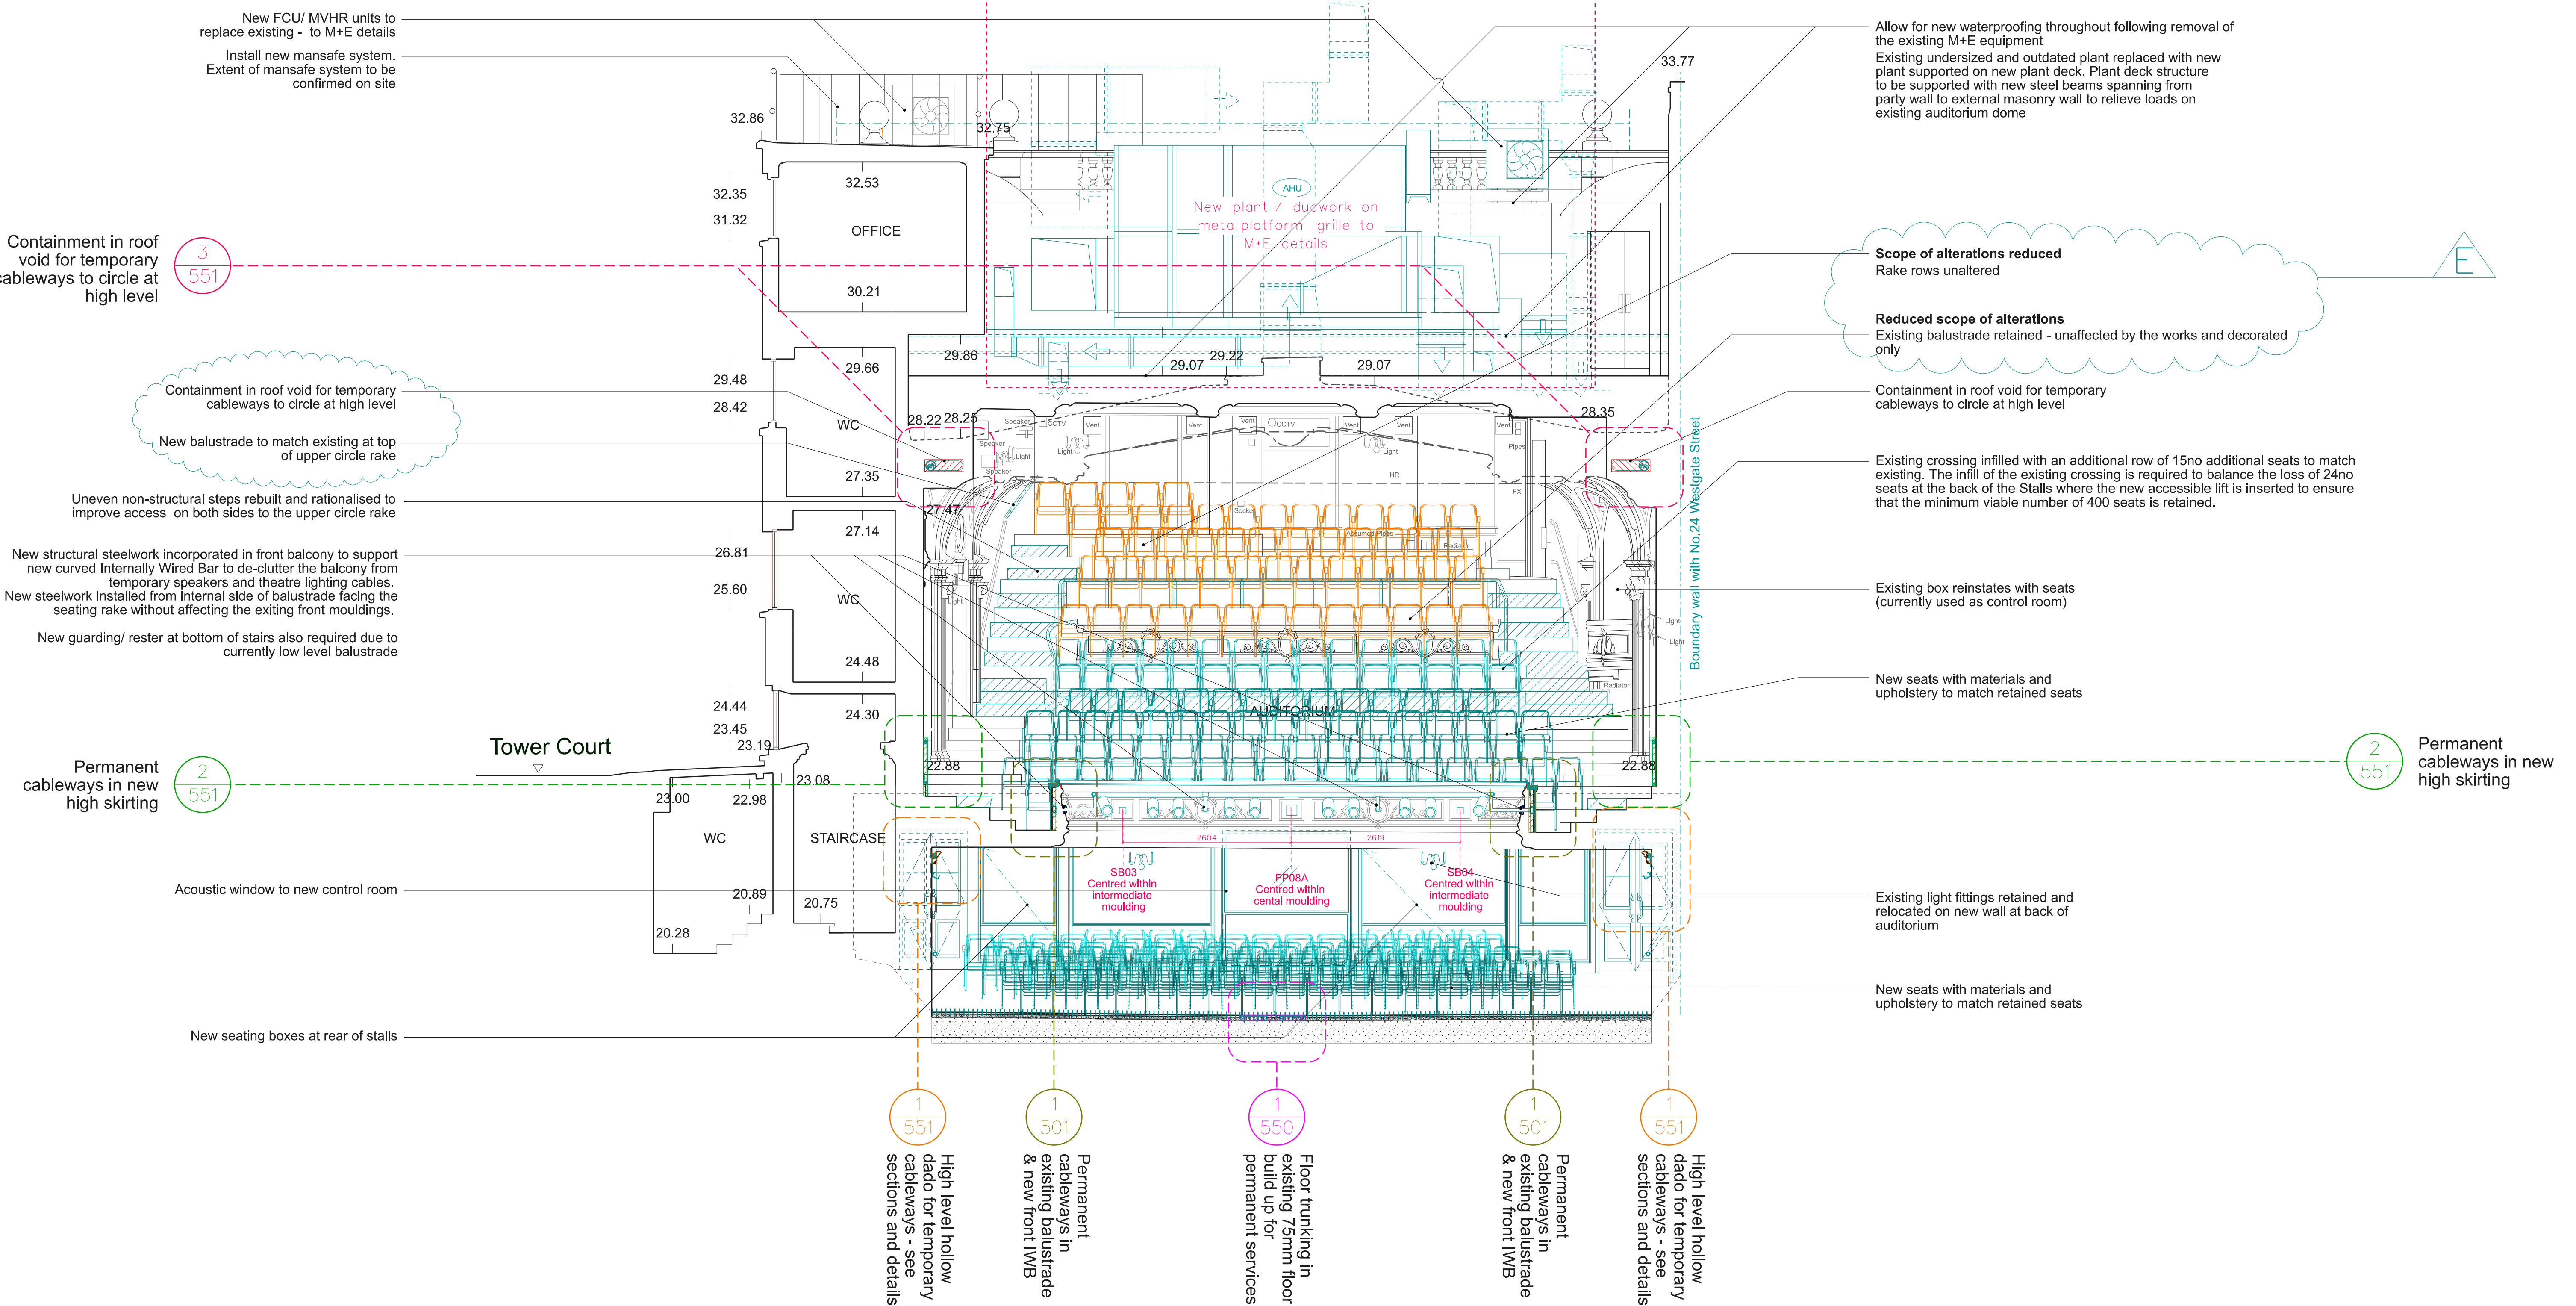


- Key
- Existing
 - Existing demolished
 - Existing seating retained and refurbished
 - Proposed

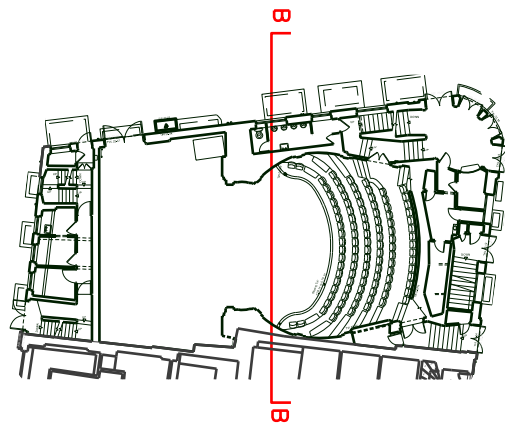

THE CONTRACTOR IS TO CHECK AND VERIFY ALL BUILDING AND SITE DIMENSIONS, LEVELS AND SEWER INVERT LEVELS AT CONNECTION POINTS BEFORE WORK STARTS

THIS DRAWING IS TO BE READ AND CHECKED IN CONJUNCTION WITH ENGINEERS AND OTHER SPECIALIST DRAWINGS

THE DRAWING AND THE WORKS DEPICTED ARE THE COPYRIGHT OF THIS PRACTICE AND MAY NOT BE REPRODUCED EXCEPT BY WRITTEN PERMISSION



0 1m 3m

E	20/09/22	Planning
D	22/08/22	For review with Design & ATG Technical Team
C	22/08/22	For review with Design & ATG Technical Team
B	20/07/22	Planning
A	13/07/22	Planning
/	17/06/22	Planning
Rev:	Date:	Description

Job: 2201 Ambassadors Theatre
Client: Ambassador Theatre Group

Drawing: Proposed Section BB
Drawing no: 2201-3-221 Rev: E Status: Stage 3
Scale: 1:50@A1, 1:100@A3 Date: 22/08/22

citizensdesignbureau
Ground Floor Units 01 & 03, 6 Westgate Street, London, E8 3RN
t : 02030959732
e : everyone@citizensdesignbureau.net