JOINERY DETAIL SHEET

1 x 3 Pairs of Sashes to Cord Hung Sash Window

Customer	Job No	Item No	Sheet
Traba	D36088	1	1 of 1

Diagram

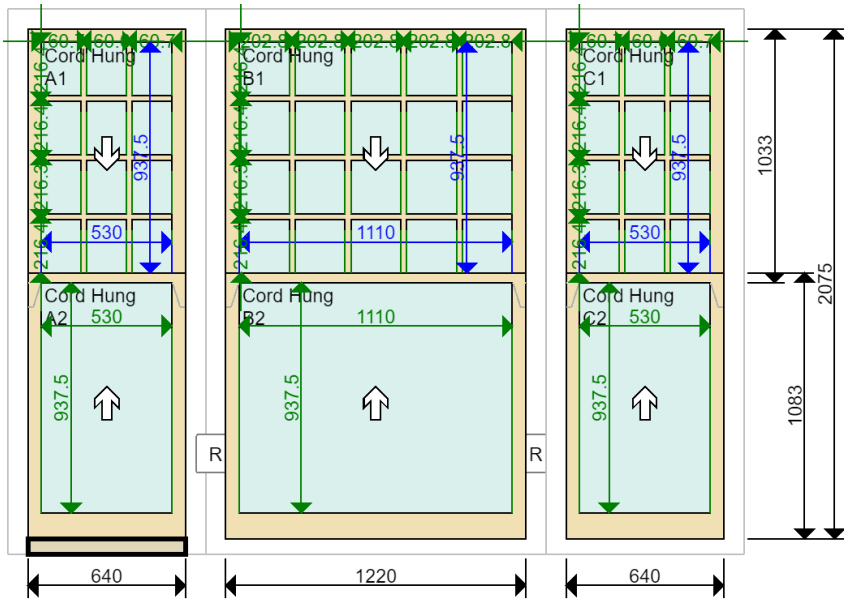

Sectional Details

Sash Head	55 mm	
Sash Stile	55 mm	
Sash Btm Rail (int)	105 mm	Square
Sash Midrail	40 mm	
Sash Thickness	48 mm	
Top Sash Horn	Template Attached	
Btm Sash Horn	No horn	

Glazing Bar	24 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	8 x 13 with 5 mm shoulder
Glazing Rebate	15 x 28 mm

Location

First Floor Front Living Room

Material

Accoya

Quantity

1
of shown on drawing

Ironmongery

3 x Fitch Catch PC
3 x Lock Chubb Window Key
12 x Rola Lock Back Plate Fastener
6 x Rola Lock PC
6 x Sash Lift PC

Glazing

	Internal Pane	Spacer	External Pane
Top	4mm Low E	10mm	4mm Low Iron
Btm	4mm Low E Toughened	10mm	4mm Low Iron

Putty Line Bead | White Tape, White Superspacer Spacer | Argon Filled

Paint Finish

Internal	Standard White
External	Standard White
Cill	Standard White

Production Notes

2 | 13 | 5 | 28

Installation Notes

Installed: Internally

1. NEW SASHES TO EXSITING BOX SASH WINDOW FRAMES.
2. BOTTOM RAIL SQUARE TO PLANE ON SITE.
3. FIT NEW CILL TO LEFT HANDSIDE SASHES. 2 X REPAIRS TO FRAME.

Job Tracking

Order received: 09-08-2022 Print date: 04-10-2022
Sold by: Stav Stavrou
Surveyed by: Chris Jewiss Last modified date: 03-10-2022

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Job No	Item No	Sheet
Traba	D36088	2	1 of 1

Diagram

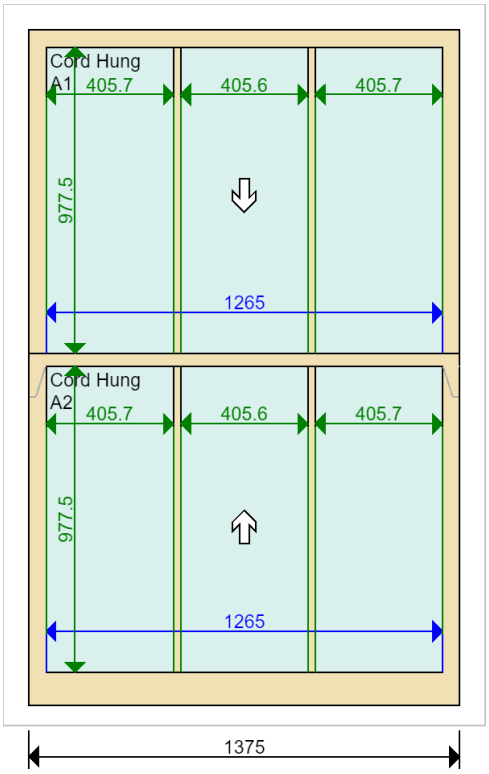

Sectional Details

Sash Head	55 mm	
Sash Stile	55 mm	
Sash Btm Rail (int)	105 mm	Square
Sash Midrail	40 mm	
Sash Thickness	48 mm	
Top Sash Horn	Template Attached	
Btm Sash Horn	No horn	

Glazing Bar	24 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	8 x 13 with 5 mm shoulder
Glazing Rebate	15 x 28 mm

Location

First Floor Rear Bedroom

Material

Accoya

Quantity

1
of shown on drawing

Ironmongery

1 x Fitch Catch PC
4 x Rola Lock Back Plate Fastener
2 x Rola Lock Egress PC
2 x Sash Lift PC

Glazing

	Internal Pane	Spacer	External Pane
Top	4mm Low E	10mm	4mm Low Iron
Btm	4mm Low E Toughened	10mm	4mm Low Iron

Putty Line Bead | White Tape, White Superspacer Spacer | Argon Filled

Paint Finish

Internal	Standard White
External	Standard White
Cill	Standard White

Production Notes

2 | 13 | 5 | 28

Installation Notes

Installed: Internally

1. NEW SASHES TO EXSITING BOX SASH WINDOW FRAMES.
2. BOTTOM RAIL SQUARE TO PLANE ON SITE.

Job Tracking

Order received: 09-08-2022 Print date: 04-10-2022
Sold by: Stav Stavrou
Surveyed by: Chris Jewiss Last modified date: 04-10-2022

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer	Job No	Item No	Sheet
Traba	D36088	3	1 of 1

Diagram

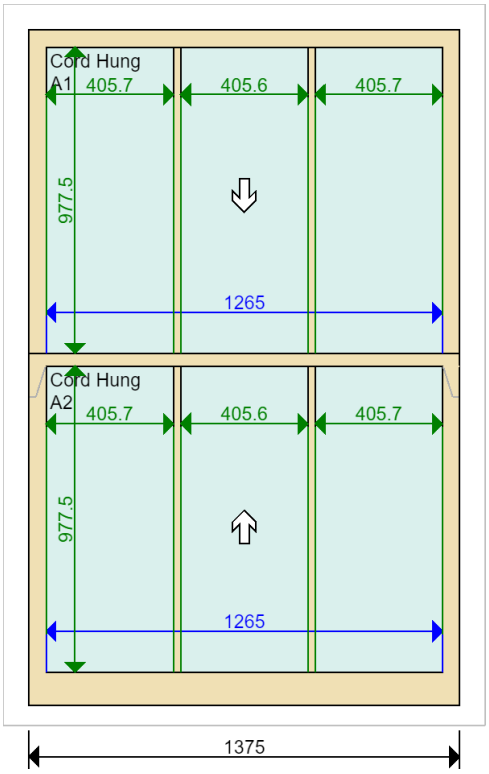

Sectional Details

Sash Head	55 mm	
Sash Stile	55 mm	
Sash Btm Rail (int)	105 mm	Square
Sash Midrail	40 mm	
Sash Thickness	48 mm	
Top Sash Horn	Template Attached	
Btm Sash Horn	No horn	

Glazing Bar	24 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	8 x 13 with 5 mm shoulder
Glazing Rebate	15 x 28 mm

Location

First Floor Rear Bedroom 2

Material

Accoya

Quantity

1
of shown on drawing

Ironmongery

1 x Fitch Catch PC
4 x Rola Lock Back Plate Fastener
2 x Rola Lock Egress PC
2 x Sash Lift PC

Glazing

	Internal Pane	Spacer	External Pane
Top	4mm Low E	10mm	4mm Low Iron
Btm	4mm Low E Toughened	10mm	4mm Low Iron

Putty Line Bead | White Tape, White Superspacer Spacer | Argon Filled

Paint Finish

Internal	Standard White
External	Standard White
Cill	Standard White

Production Notes

2 | 13 | 5 | 28

Installation Notes

Installed: Internally

1. NEW SASHES TO EXSITING BOX SASH WINDOW FRAMES.
2. BOTTOM RAIL SQUARE TO PLANE ON SITE.

Job Tracking

Order received: 09-08-2022 Print date: 04-10-2022
Sold by: Stav Stavrou
Surveyed by: Chris Jewiss Last modified date: 03-10-2022